

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204683

Luminaire Tested: **LE\_6B20D010 EC6B10208050 6LBPSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204683  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B20D010 EC6B10208050 6LBPSMW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM  
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W  
DL3-21.8 6 W DLE-22.46 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2960.3 lumens  
Efficiency: N/A  
Efficacy: 142.3 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 20.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204683

CATALOG NUMBER: LE\_6B20D010 EC6B10208050 6LBPSMW1

### Luminous Intensity Polar Plot

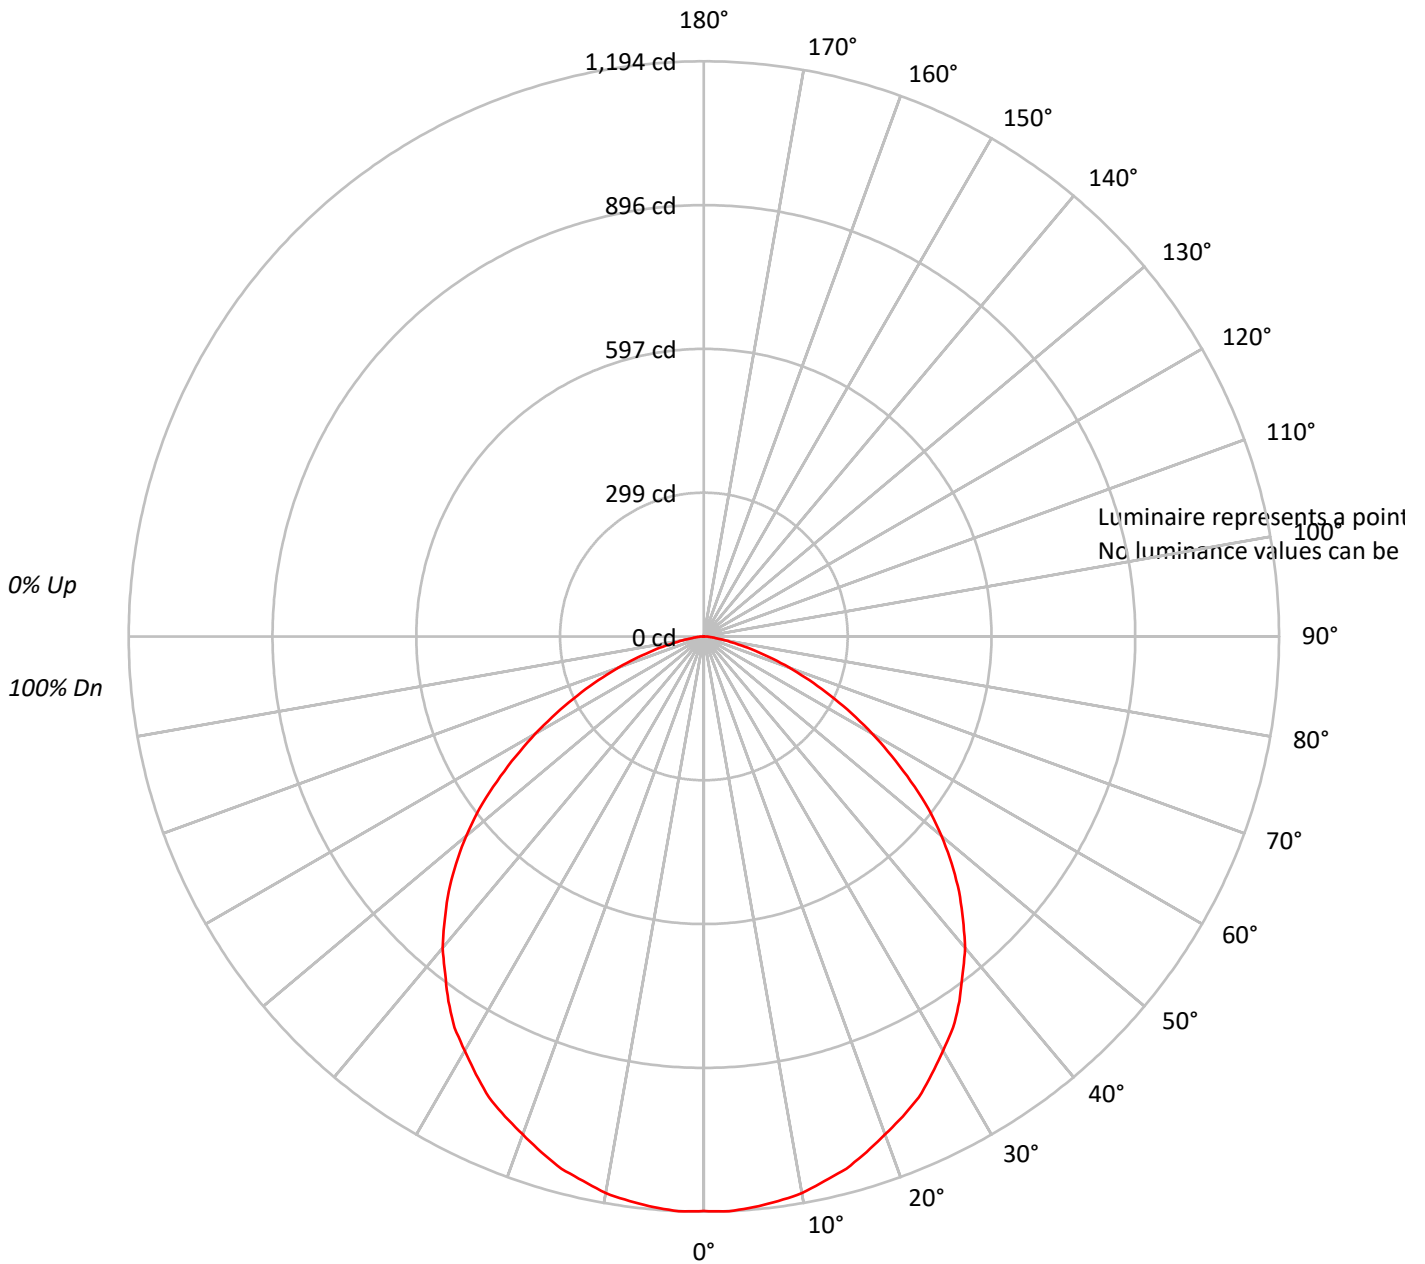



TEST NUMBER: P204683

CATALOG NUMBER: LE\_6B20D010 EC6B10208050 6LBPSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204683

CATALOG NUMBER: LE\_6B20D010 EC6B10208050 6LBPSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	113.0	3.8
10°-20°	322.1	10.9
20°-30°	485.2	16.4
30°-40°	577.3	19.5
40°-50°	576.2	19.5
50°-60°	468.6	15.8
60°-70°	288.3	9.7
70°-80°	111.7	3.8
80°-90°	17.9	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	920.3	31.1
0°-40°	1497.6	50.6
0°-60°	2542.4	85.9
0°-90°	2960.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2960.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1193	
5°	1189	113
15°	1144	322
25°	1056	485
35°	924	577
45°	749	576
55°	524	469
65°	289	288
75°	102	112
85°	14	18
90°	0	



TEST NUMBER: P204683

CATALOG NUMBER: LE\_6B20D010 EC6B10208050 6LBPSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1192.8
2.5°	1194.5
5°	1189.2
7.5°	1182.2
10°	1173.4
12.5°	1157.6
15°	1143.6
17.5°	1122.5
20°	1099.8
22.5°	1078.8
25°	1055.9
27.5°	1024.4
30°	992.8
32.5°	963.0
35°	924.4
37.5°	882.2
40°	843.6
42.5°	796.2
45°	749.0
47.5°	698.1
50°	643.8
52.5°	587.6
55°	524.5
57.5°	463.0
60°	403.4
62.5°	345.5
65°	289.4
67.5°	236.8
70°	187.6
72.5°	142.1
75°	101.8
77.5°	66.6
80°	40.4
82.5°	24.5
85°	14.0
87.5°	7.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)