

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204689

Luminaire Tested: **LE_6B20D010 EC6B10209050 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204689
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B20D010 EC6B10209050 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
WATTAGE D010TR-21.86 W DE010-20.46 W D5LT-21.24 W DMX-20.89 W DL2-22.5 W
DL3-21.8 6 W DLE-22.46 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2491.6 lumens
Efficiency: N/A
Efficacy: 119.8 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 20.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204689

CATALOG NUMBER: LE_6B20D010 EC6B10209050 6LBPSMW1

Luminous Intensity Polar Plot

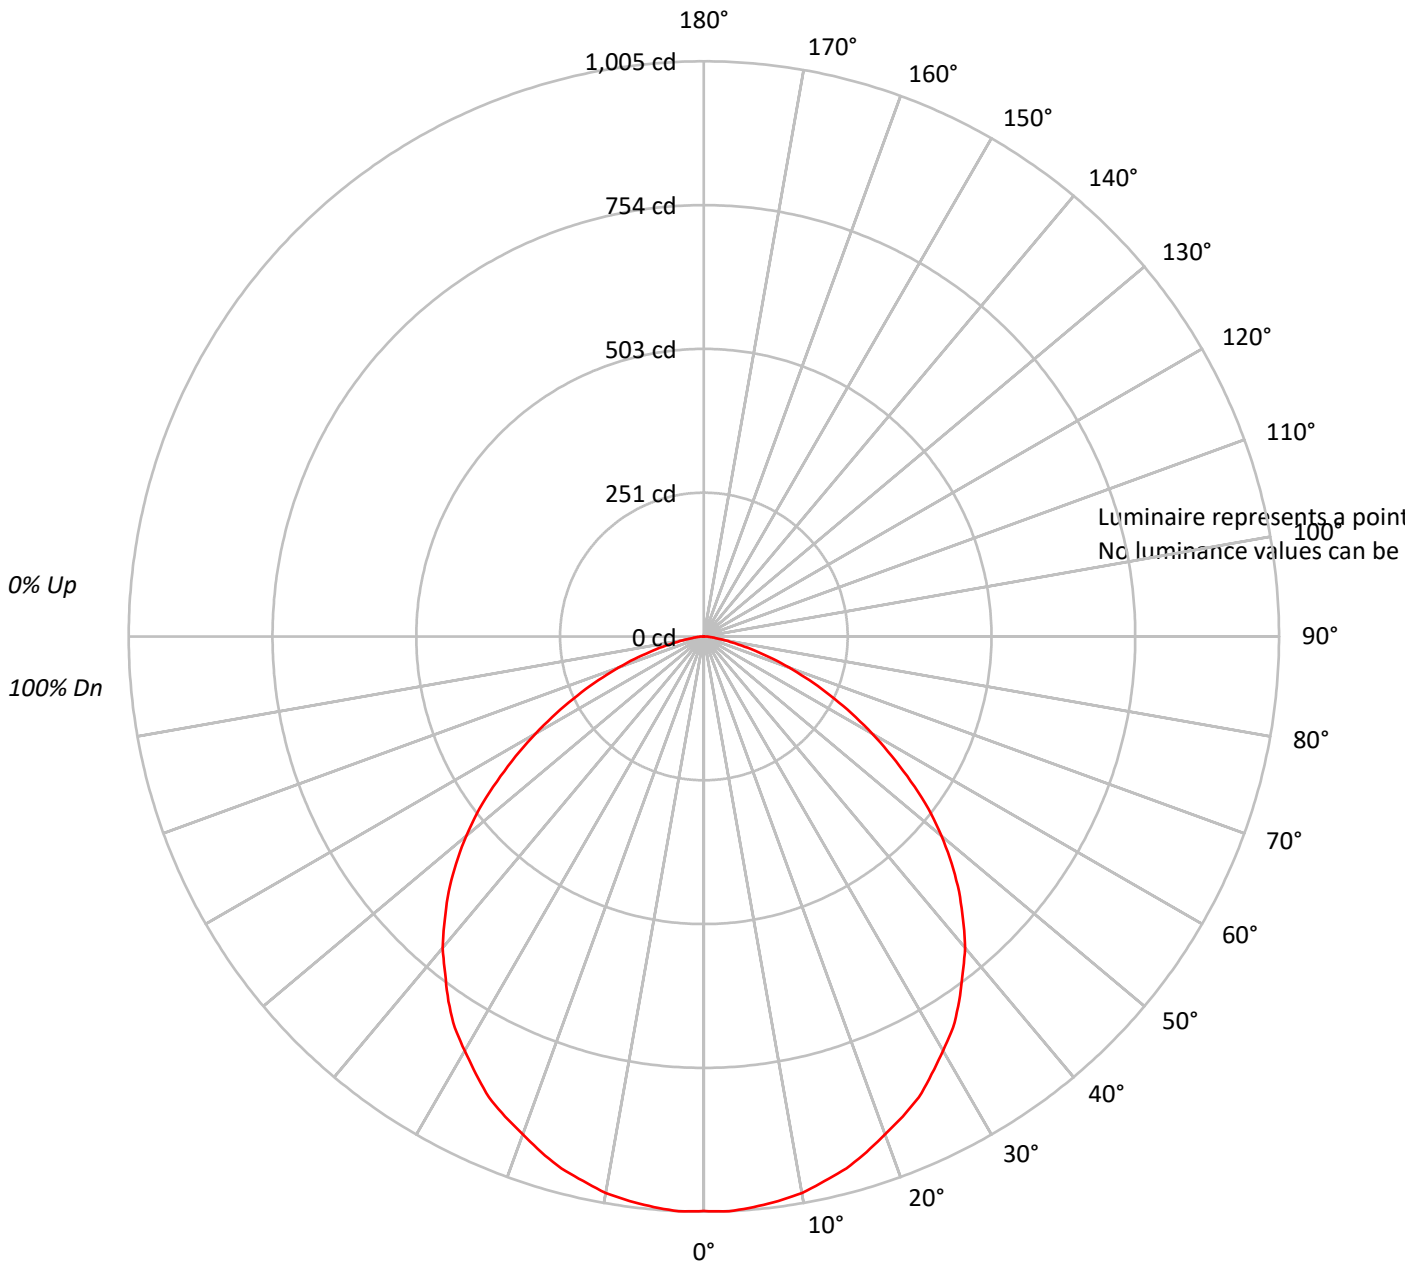



TEST NUMBER: P204689

CATALOG NUMBER: LE_6B20D010 EC6B10209050 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204689

CATALOG NUMBER: LE_6B20D010 EC6B10209050 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	95.1	3.8
10°-20°	271.1	10.9
20°-30°	408.3	16.4
30°-40°	485.9	19.5
40°-50°	485.0	19.5
50°-60°	394.4	15.8
60°-70°	242.6	9.7
70°-80°	94.0	3.8
80°-90°	15.0	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	774.6	31.1
0°-40°	1260.5	50.6
0°-60°	2139.9	85.9
0°-90°	2491.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2491.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1004	
5°	1001	95
15°	962	271
25°	889	408
35°	778	486
45°	630	485
55°	441	394
65°	244	243
75°	86	94
85°	12	15
90°	0	



TEST NUMBER: P204689

CATALOG NUMBER: LE_6B20D010 EC6B10209050 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1003.9
2.5°	1005.4
5°	1000.9
7.5°	995.0
10°	987.6
12.5°	974.4
15°	962.5
17.5°	944.9
20°	925.6
22.5°	907.9
25°	888.8
27.5°	862.1
30°	835.6
32.5°	810.5
35°	778.0
37.5°	742.6
40°	710.1
42.5°	670.2
45°	630.4
47.5°	587.6
50°	541.8
52.5°	494.6
55°	441.4
57.5°	389.8
60°	339.5
62.5°	290.9
65°	243.6
67.5°	199.2
70°	158.0
72.5°	119.6
75°	85.6
77.5°	56.1
80°	34.0
82.5°	20.6
85°	11.8
87.5°	5.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)