

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205107

Luminaire Tested: **LE\_6B30D010 EC6B30509024 6LBMLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205107  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B30D010 EC6B30509024 6LBML1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH SPECULAR CLEAR TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2388.3 lumens  
Efficiency: N/A  
Efficacy: 85.3 lumens/watt  
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205107

CATALOG NUMBER: LE\_6B30D010 EC6B30509024 6LBMLI1

### Luminous Intensity Polar Plot

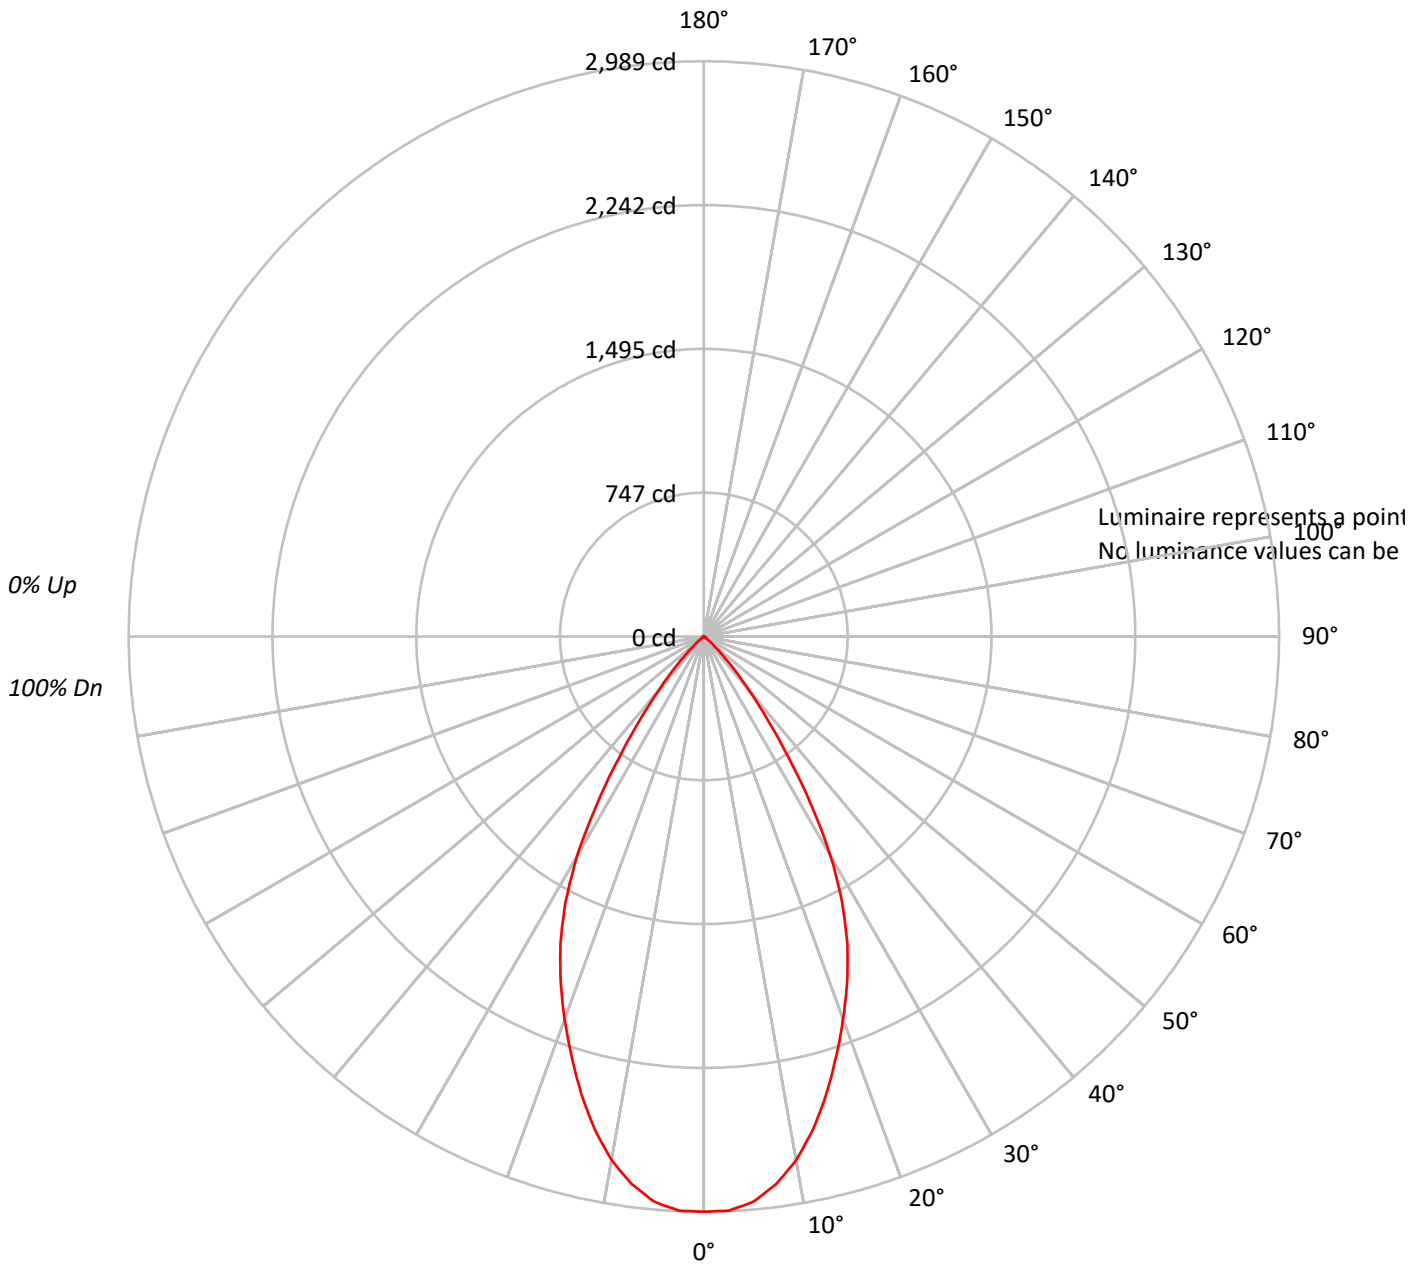



TEST NUMBER: P205107

CATALOG NUMBER: LE\_6B30D010 EC6B30509024 6LBMLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94																																				
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88																																				
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82																																				
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76																																				
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71																																				
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																																				
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63																																				
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59																																				
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																																				
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52																																				

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205107

CATALOG NUMBER: LE\_6B30D010 EC6B30509024 6LBMLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	275.3	11.5
10°-20°	685.5	28.7
20°-30°	796.9	33.4
30°-40°	488.0	20.4
40°-50°	121.2	5.1
50°-60°	14.2	0.6
60°-70°	5.2	0.2
70°-80°	2.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1757.7	73.6
0°-40°	2245.7	94.0
0°-60°	2381.1	99.7
0°-90°	2388.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2388.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2989	
5°	2949	275
15°	2460	686
25°	1763	797
35°	764	488
45°	134	121
55°	12	14
65°	6	5
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P205107

CATALOG NUMBER: LE\_6B30D010 EC6B30509024 6LBMLI1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2988.9
2.5°	2985.9
5°	2949.2
7.5°	2869.8
10°	2762.8
12.5°	2622.2
15°	2460.2
17.5°	2286.0
20°	2114.9
22.5°	1943.8
25°	1763.4
27.5°	1555.6
30°	1317.2
32.5°	1039.1
35°	764.0
37.5°	537.9
40°	366.8
42.5°	229.2
45°	134.5
47.5°	76.4
50°	39.8
52.5°	18.4
55°	12.2
57.5°	9.1
60°	9.1
62.5°	6.1
65°	6.1
67.5°	3.0
70°	3.0
72.5°	3.0
75°	3.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)