

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203454

Luminaire Tested: **LE_6B30D010 EC6B30508027 6LBMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203454
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B30D010 EC6B30508027 6LBMB1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1538.4 lumens
Efficiency: N/A
Efficacy: 54.9 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.86
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203454

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMB1

Luminous Intensity Polar Plot

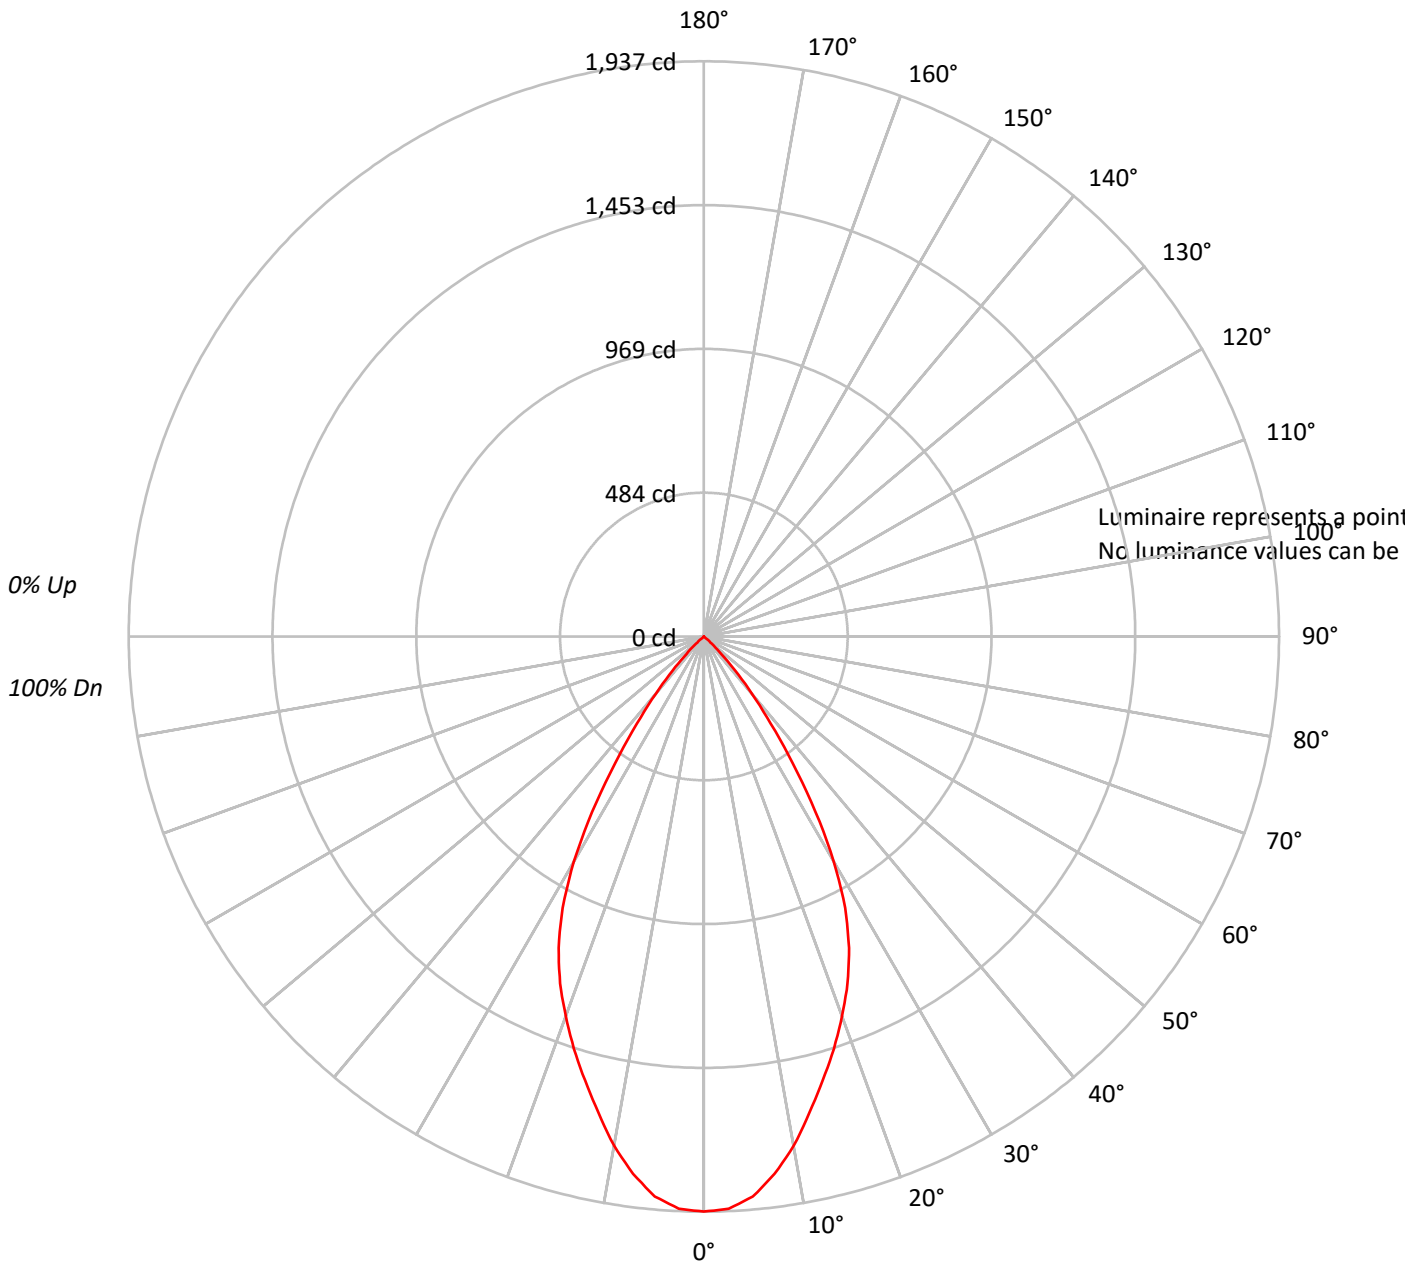



TEST NUMBER: P203454

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94																												
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88																												
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	86	83	82																												
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	76																												
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72																												
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67																												
7	84	75	69	65	83	75	69	65	73	68	65	72	68	65	71	67	64	63																												
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59																												
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56																												
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52																												

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203454

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	175.7	11.4
10°-20°	433.6	28.2
20°-30°	522.3	33.9
30°-40°	330.4	21.5
40°-50°	75.6	4.9
50°-60°	0.9	0.1
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1131.5	73.6
0°-40°	1461.9	95.0
0°-60°	1538.4	100.0
0°-90°	1538.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1538.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1937	
5°	1893	176
15°	1547	434
25°	1157	522
35°	521	330
45°	84	76
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P203454

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1936.6
2.5°	1928.6
5°	1892.9
7.5°	1825.2
10°	1741.8
12.5°	1642.4
15°	1546.9
17.5°	1455.5
20°	1360.0
22.5°	1264.6
25°	1157.2
27.5°	1030.0
30°	874.9
32.5°	699.9
35°	521.0
37.5°	369.9
40°	250.5
42.5°	155.1
45°	83.5
47.5°	35.8
50°	8.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)