

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202630

Luminaire Tested: **LE_6B30D010 EC6B30508027 6LBMWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202630
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B30D010 EC6B30508027 6LBMWMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2772.1 lumens
Efficiency: N/A
Efficacy: 99.0 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.89
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202630

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMWMH1

Luminous Intensity Polar Plot

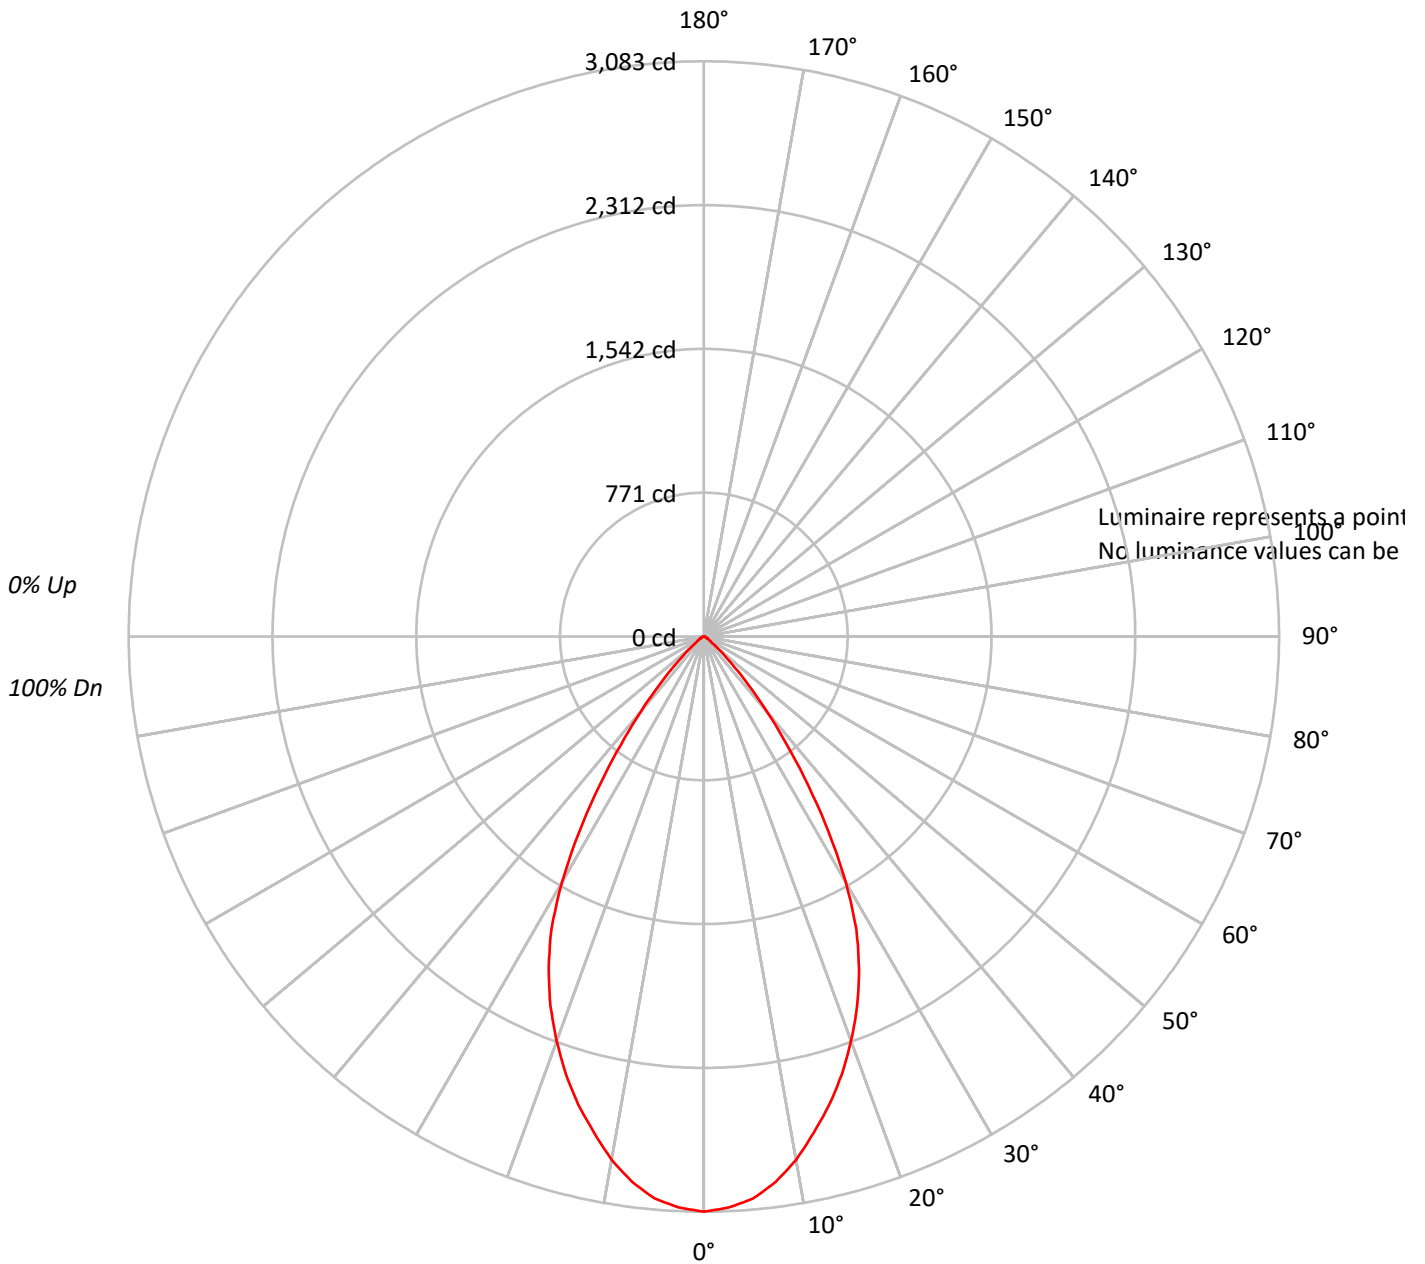



TEST NUMBER: P202630

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86		
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74		
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69		
6	87	78	72	67	85	77	71	67	76	71	67	74	70	66	73	69	66	64		
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	61	60		
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56		
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53		
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202630

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	282.9	10.2
10°-20°	726.3	26.2
20°-30°	892.1	32.2
30°-40°	611.7	22.1
40°-50°	196.6	7.1
50°-60°	39.9	1.4
60°-70°	15.7	0.6
70°-80°	5.9	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1901.3	68.6
0°-40°	2513.1	90.7
0°-60°	2749.6	99.2
0°-90°	2772.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2772.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3083	
5°	3024	283
15°	2598	726
25°	1968	892
35°	976	612
45°	233	197
55°	40	40
65°	16	16
75°	5	6
85°	0	1
90°	0	



TEST NUMBER: P202630

CATALOG NUMBER: LE_6B30D010 EC6B30508027 6LBMWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3082.8
2.5°	3063.9
5°	3023.9
7.5°	2948.6
10°	2847.5
12.5°	2722.9
15°	2598.2
17.5°	2459.6
20°	2306.8
22.5°	2146.9
25°	1968.1
27.5°	1770.6
30°	1521.4
32.5°	1246.2
35°	975.9
37.5°	729.0
40°	524.4
42.5°	357.4
45°	232.8
47.5°	143.4
50°	87.0
52.5°	54.1
55°	40.0
57.5°	30.6
60°	23.5
62.5°	18.8
65°	16.5
67.5°	11.8
70°	9.4
72.5°	7.0
75°	4.8
77.5°	4.8
80°	2.4
82.5°	2.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)