

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203357

Luminaire Tested: **LE_6B30D010 EC6B30509027 6LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203357
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B30D010 EC6B30509027 6LBMWH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2395.0 lumens
Efficiency: N/A
Efficacy: 85.5 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203357

CATALOG NUMBER: LE_6B30D010 EC6B30509027 6LBMWH1

Luminous Intensity Polar Plot

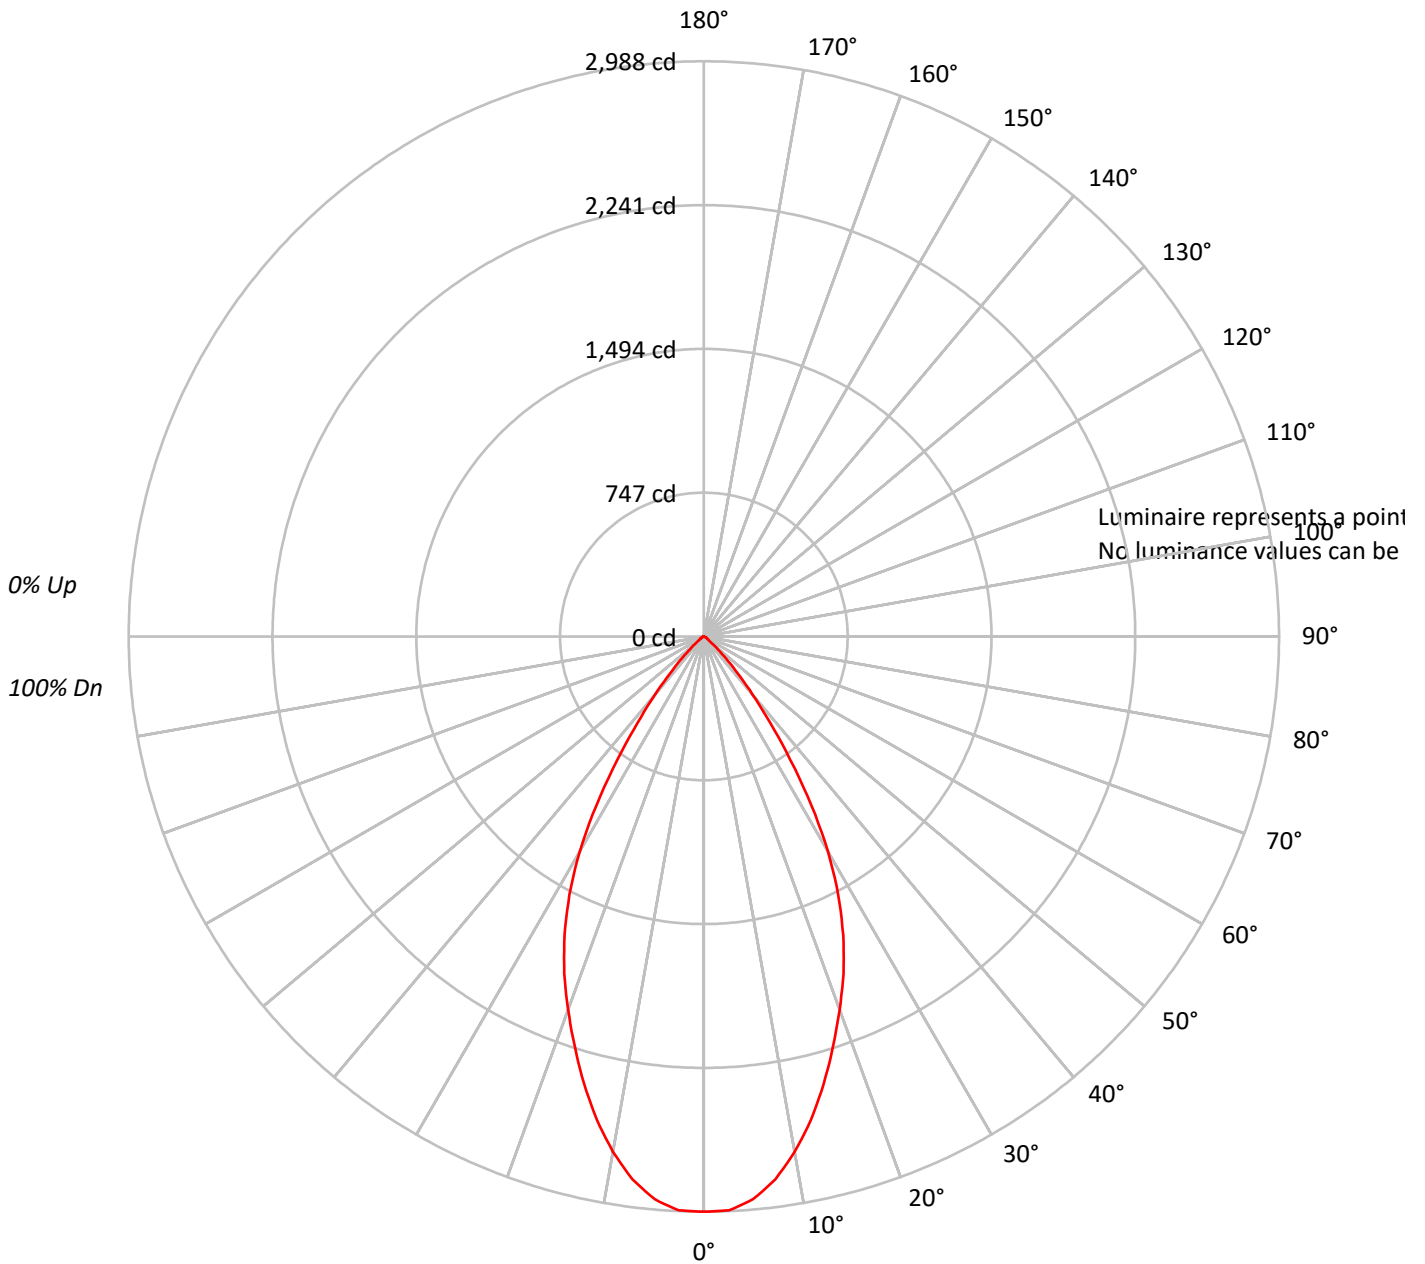



TEST NUMBER: P203357

CATALOG NUMBER: LE_6B30D010 EC6B30509027 6LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94		
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87		
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81		
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76		
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71		
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66		
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62		
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58		
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55		
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203357

CATALOG NUMBER: LE_6B30D010 EC6B30509027 6LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	273.1	11.4
10°-20°	670.6	28.0
20°-30°	775.9	32.4
30°-40°	495.9	20.7
40°-50°	140.6	5.9
50°-60°	25.1	1.0
60°-70°	10.3	0.4
70°-80°	3.6	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1719.6	71.8
0°-40°	2215.5	92.5
0°-60°	2381.2	99.4
0°-90°	2395.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2395.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2988	
5°	2934	273
15°	2405	671
25°	1712	776
35°	783	496
45°	163	141
55°	23	25
65°	10	10
75°	3	4
85°	0	0
90°	0	



TEST NUMBER: P203357

CATALOG NUMBER: LE_6B30D010 EC6B30509027 6LBMWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2987.9
2.5°	2984.5
5°	2934.5
7.5°	2844.6
10°	2718.0
12.5°	2571.5
15°	2404.9
17.5°	2231.8
20°	2061.9
22.5°	1895.2
25°	1712.1
27.5°	1512.2
30°	1289.1
32.5°	1039.2
35°	782.8
37.5°	566.2
40°	393.0
42.5°	259.8
45°	163.2
47.5°	96.6
50°	56.6
52.5°	33.2
55°	23.4
57.5°	20.0
60°	16.6
62.5°	13.4
65°	10.0
67.5°	6.6
70°	6.6
72.5°	3.4
75°	3.4
77.5°	3.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)