

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203878

Luminaire Tested: **LE\_6B30D010 EC6B30509730 6LBNGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203878  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B30D010 EC6B30509730 6LBNGPH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1386.8 lumens  
Efficiency: N/A  
Efficacy: 49.5 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.88  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203878

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBNGPH1

### Luminous Intensity Polar Plot

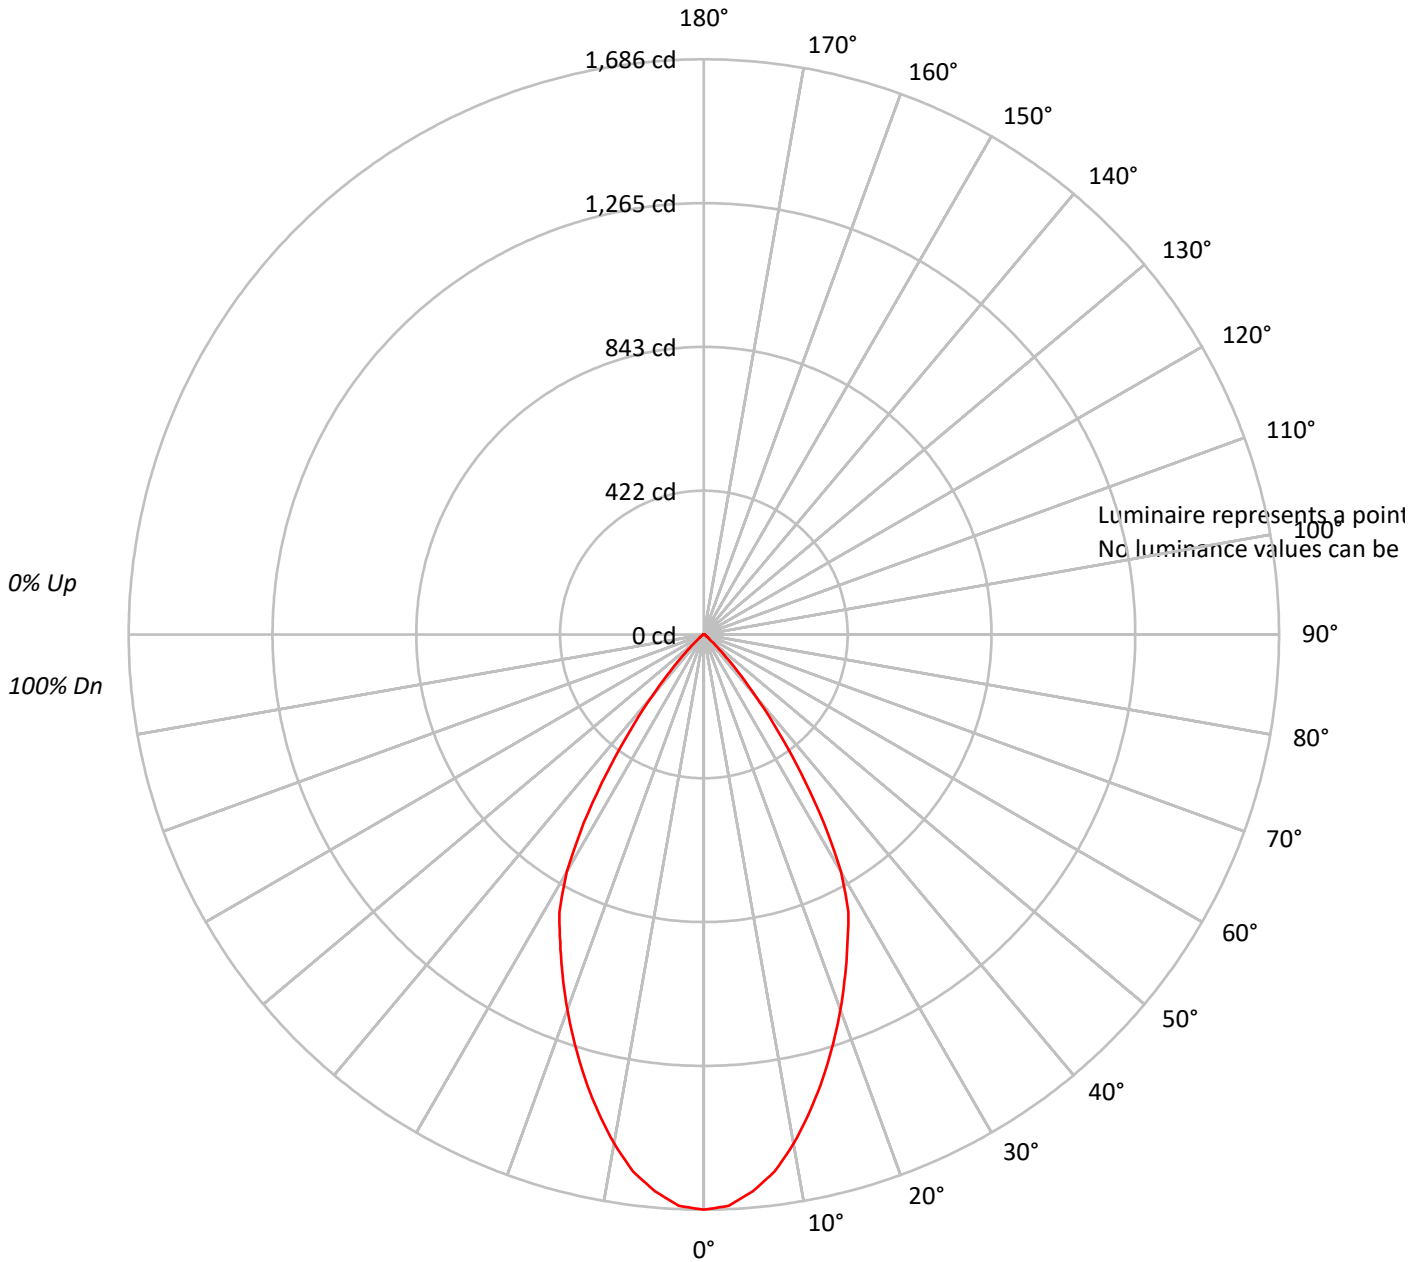



TEST NUMBER: P203878

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBNGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87			
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81			
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76			
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70			
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66			
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62			
8	80	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54			
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	52	51			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203878

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBNGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	152.6	11.0
10°-20°	376.4	27.1
20°-30°	456.0	32.9
30°-40°	310.8	22.4
40°-50°	74.0	5.3
50°-60°	11.6	0.8
60°-70°	4.3	0.3
70°-80°	1.2	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	985.0	71.0
0°-40°	1295.8	93.4
0°-60°	1381.4	99.6
0°-90°	1386.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1386.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1686	
5°	1638	153
15°	1347	376
25°	996	456
35°	496	311
45°	79	74
55°	13	12
65°	3	4
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P203878

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBNGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1685.8
2.5°	1676.2
5°	1638.4
7.5°	1587.8
10°	1515.0
12.5°	1432.8
15°	1347.4
17.5°	1258.8
20°	1170.2
22.5°	1081.6
25°	996.2
27.5°	917.2
30°	803.4
32.5°	654.8
35°	496.5
37.5°	354.2
40°	234.0
42.5°	145.5
45°	79.1
47.5°	41.1
50°	22.1
52.5°	15.9
55°	12.6
57.5°	9.5
60°	6.4
62.5°	6.4
65°	3.1
67.5°	3.1
70°	3.1
72.5°	3.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)