

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204187

Luminaire Tested: **LE_6B30D010 EC6B30509730 6LBSH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204187
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B30D010 EC6B30509730 6LBSH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2871.7 lumens
Efficiency: N/A
Efficacy: 102.6 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204187

CATALOG NUMBER: LE_6B30D010 EC6B30509730 6LBSH1

Luminous Intensity Polar Plot

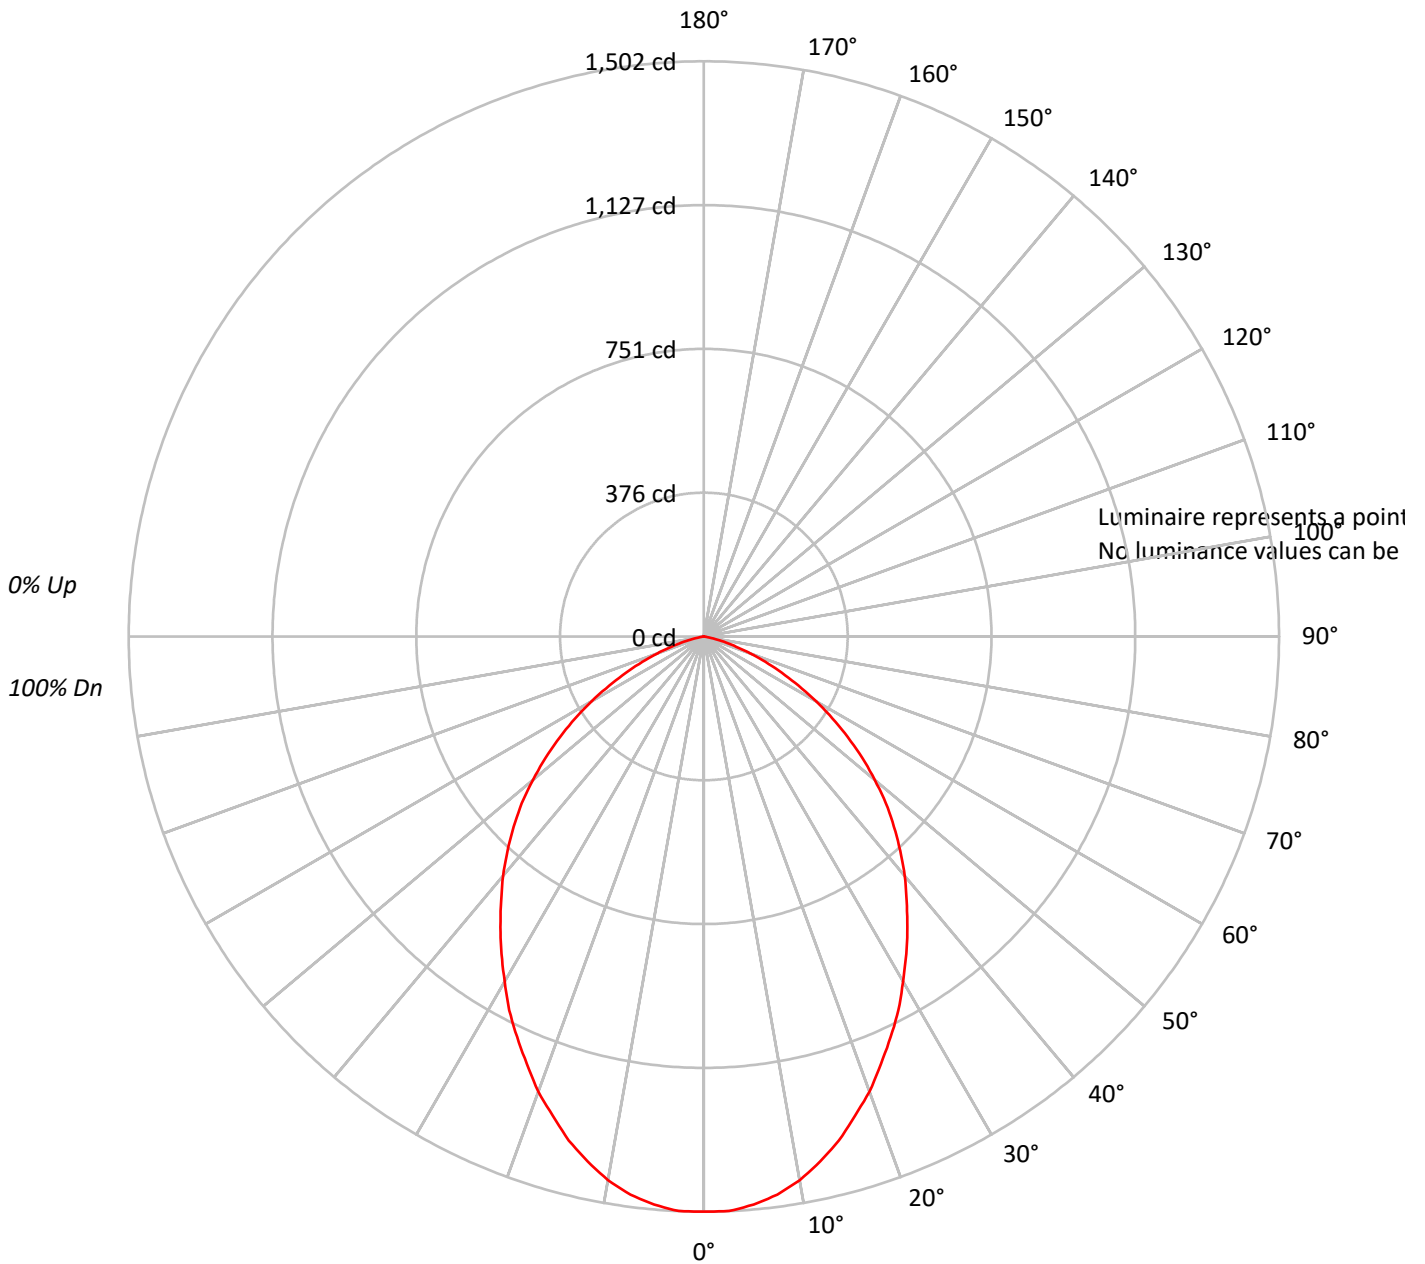



TEST NUMBER: P204187

CATALOG NUMBER: LE_6B30D010 EC6B30509730 6LBSH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204187

CATALOG NUMBER: LE_6B30D010 EC6B30509730 6LBSH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.7	4.9
10°-20°	382.4	13.3
20°-30°	531.0	18.5
30°-40°	579.5	20.2
40°-50°	540.6	18.8
50°-60°	410.3	14.3
60°-70°	224.6	7.8
70°-80°	61.8	2.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1054.1	36.7
0°-40°	1633.5	56.9
0°-60°	2584.4	90.0
0°-90°	2871.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2871.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1502	
5°	1489	141
15°	1363	382
25°	1154	531
35°	926	579
45°	702	541
55°	458	410
65°	224	225
75°	54	62
85°	0	1
90°	0	



TEST NUMBER: P204187

CATALOG NUMBER: LE_6B30D010 EC6B30509730 6LBSH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1501.9
2.5°	1501.9
5°	1489.2
7.5°	1470.2
10°	1441.9
12.5°	1403.9
15°	1362.8
17.5°	1312.1
20°	1264.8
22.5°	1207.9
25°	1154.1
27.5°	1100.4
30°	1040.2
32.5°	983.4
35°	926.4
37.5°	869.5
40°	815.8
42.5°	758.9
45°	701.9
47.5°	645.0
50°	581.8
52.5°	521.8
55°	458.5
57.5°	398.4
60°	338.4
62.5°	278.2
65°	224.5
67.5°	173.9
70°	129.6
72.5°	88.5
75°	53.8
77.5°	25.2
80°	6.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)