

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202848

Luminaire Tested: **LE\_6B30D010 EC6B30509730 6LBWWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202848  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B30D010 EC6B30509730 6LBWWH1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH WHEAT TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2521.0 lumens  
Efficiency: N/A  
Efficacy: 90.0 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202848

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBWWH1

### Luminous Intensity Polar Plot

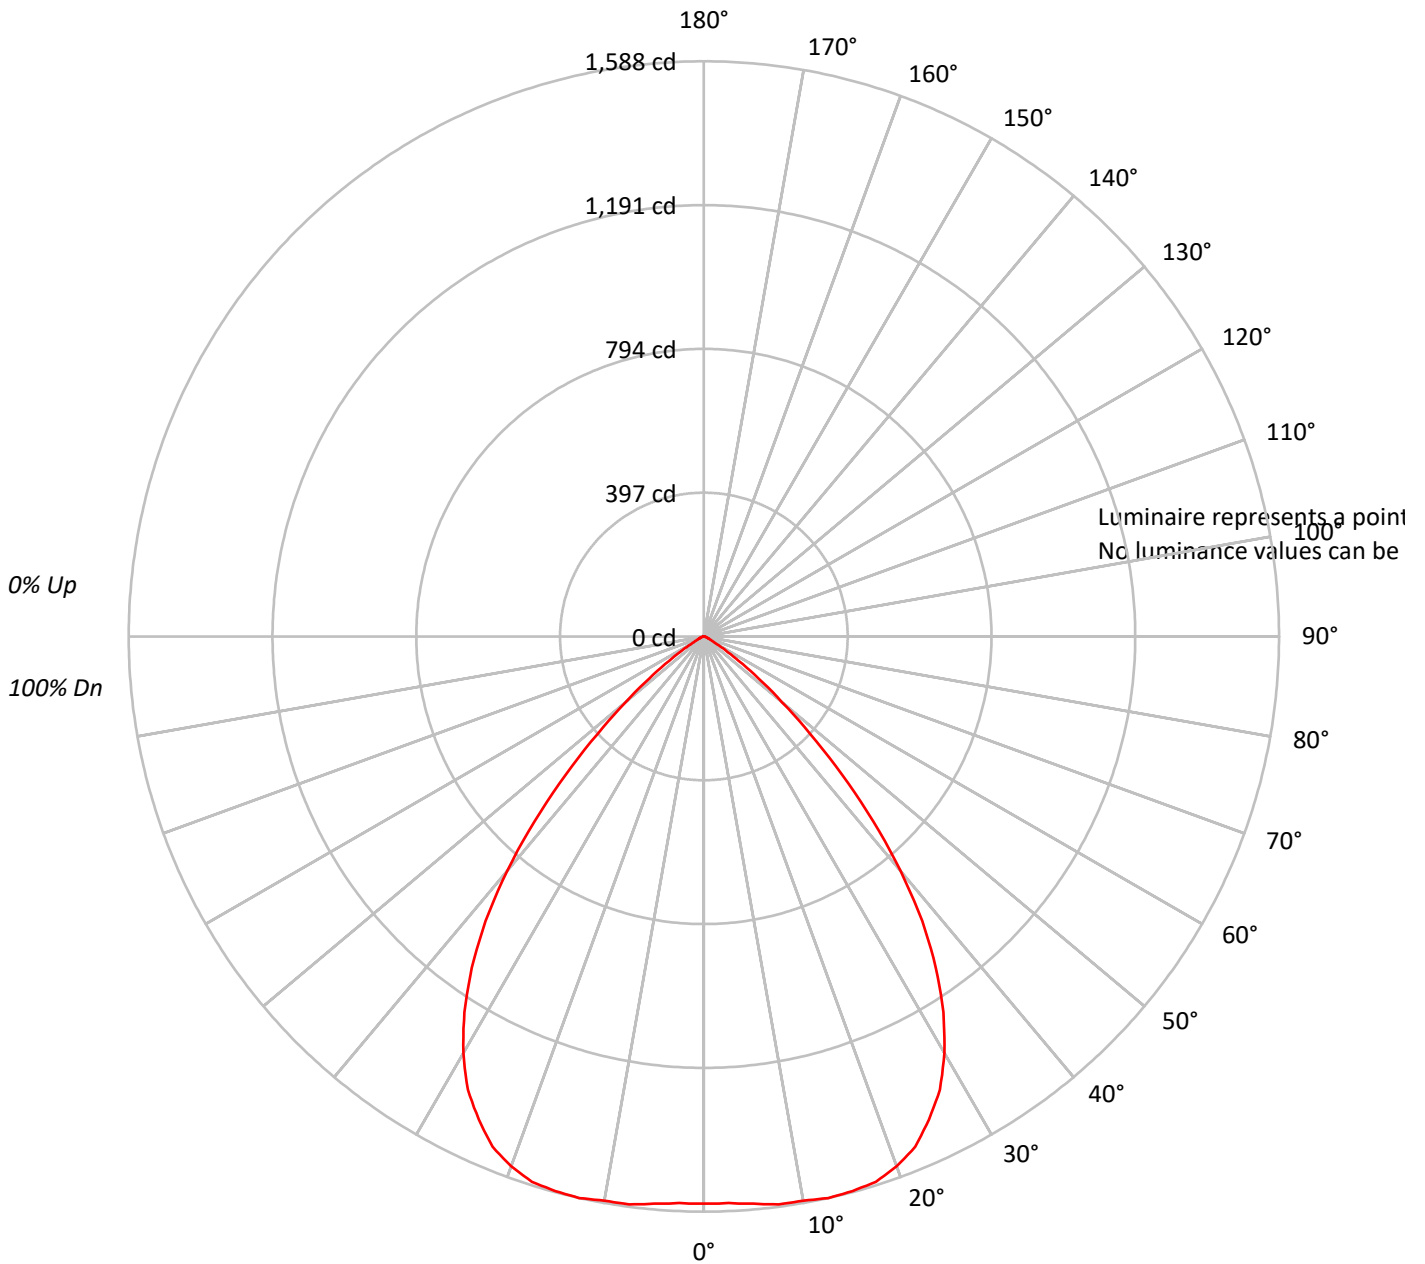



TEST NUMBER: P202848

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBWWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	71	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202848

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBWWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	150.5	6.0
10°-20°	447.6	17.8
20°-30°	673.8	26.7
30°-40°	688.9	27.3
40°-50°	418.4	16.6
50°-60°	117.8	4.7
60°-70°	17.9	0.7
70°-80°	5.8	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1271.8	50.4
0°-40°	1960.7	77.8
0°-60°	2496.9	99.0
0°-90°	2521.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2521.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1566	
5°	1572	151
15°	1585	448
25°	1471	674
35°	1117	689
45°	538	418
55°	117	118
65°	16	18
75°	6	6
85°	0	0
90°	0	



TEST NUMBER: P202848

CATALOG NUMBER: LE\_6B30D010 EC6B30509730 6LBWWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1565.9
2.5°	1565.9
5°	1572.1
7.5°	1581.6
10°	1581.6
12.5°	1588.0
15°	1584.9
17.5°	1578.5
20°	1556.4
22.5°	1524.8
25°	1470.9
27.5°	1410.9
30°	1328.6
32.5°	1230.5
35°	1116.6
37.5°	990.1
40°	844.6
42.5°	692.8
45°	537.8
47.5°	398.6
50°	281.5
52.5°	189.8
55°	117.0
57.5°	69.6
60°	34.8
62.5°	22.1
65°	15.9
67.5°	12.6
70°	9.5
72.5°	6.4
75°	6.4
77.5°	3.1
80°	3.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)