

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204798

Luminaire Tested: **LE\_6B30D010 EC6B30508040 6LBCSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204798  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B30D010 EC6B30508040 6LBCSMW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM  
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W  
DL3-29.67 W DLE-29.73 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4202.5 lumens  
Efficiency: N/A  
Efficacy: 150.1 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 28  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204798

CATALOG NUMBER: LE\_6B30D010 EC6B30508040 6LBCSMW1

### Luminous Intensity Polar Plot

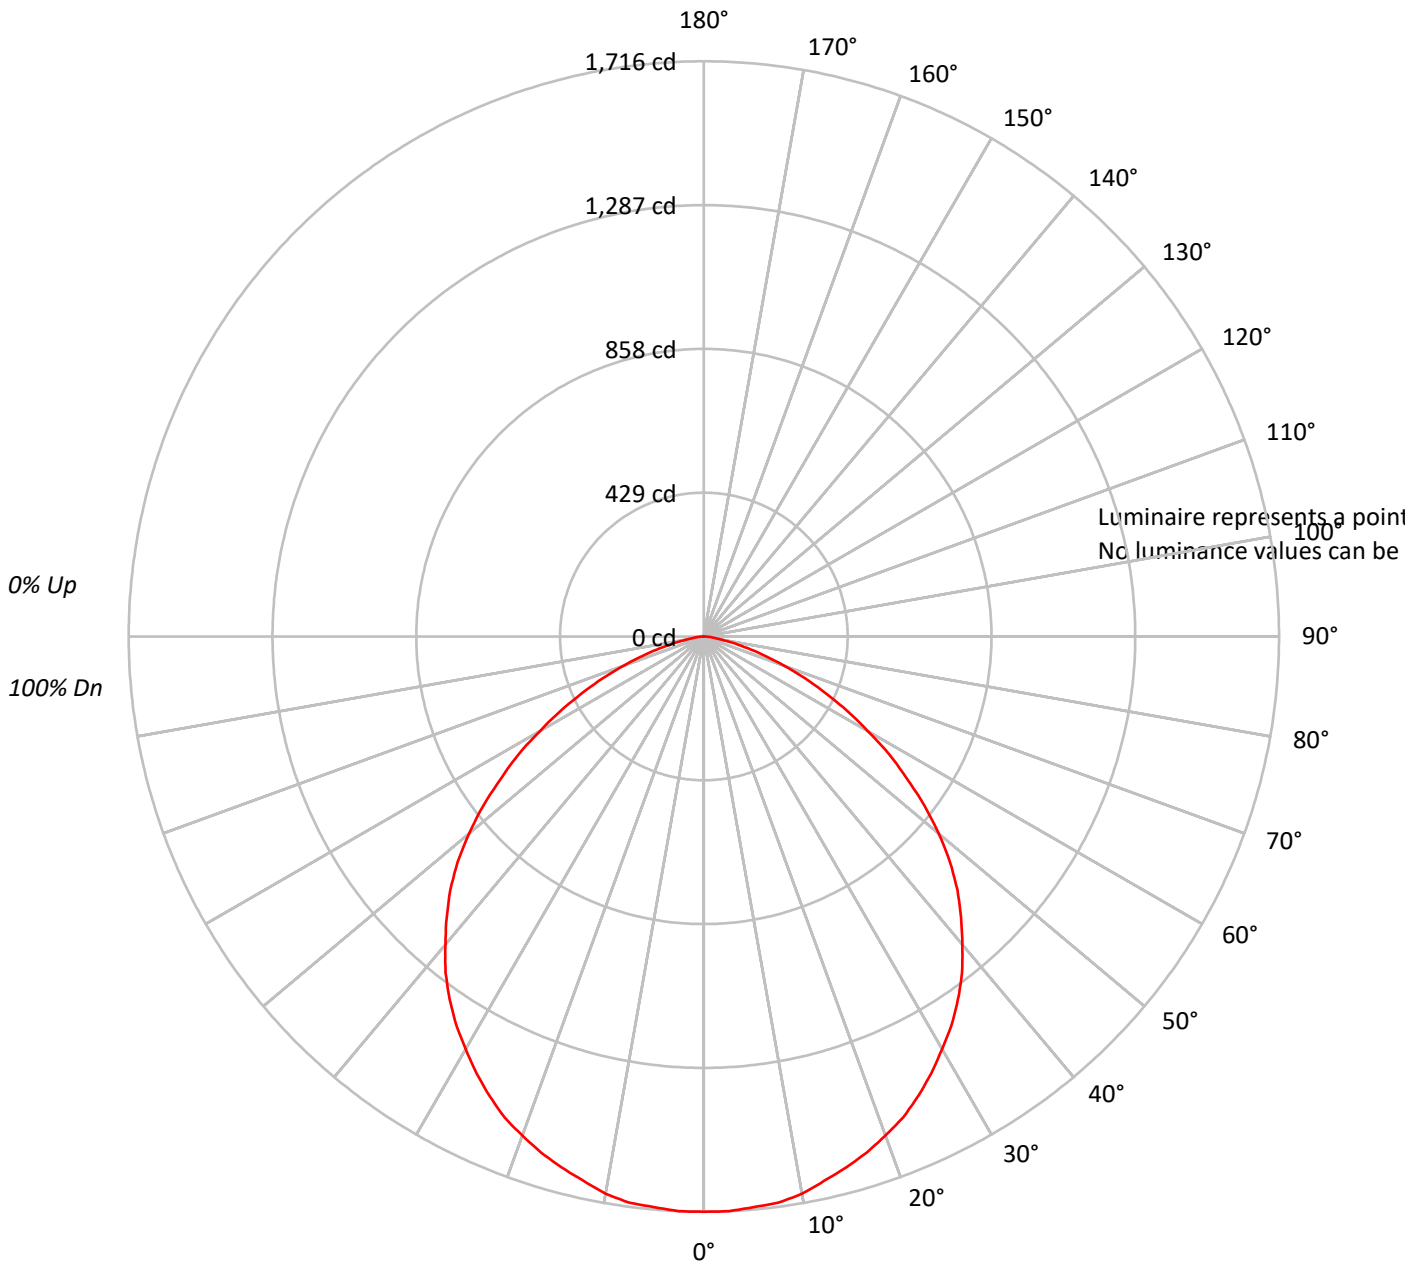



TEST NUMBER: P204798

CATALOG NUMBER: LE\_6B30D010 EC6B30508040 6LBCSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			87
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74			74
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63			63
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55			55
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48			48
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42			42
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37			37
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33			33
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30			30
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27			27

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204798

CATALOG NUMBER: LE\_6B30D010 EC6B30508040 6LBCSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	162.6	3.9
10°-20°	463.0	11.0
20°-30°	696.5	16.6
30°-40°	825.4	19.6
40°-50°	821.4	19.5
50°-60°	662.2	15.8
60°-70°	400.6	9.5
70°-80°	148.7	3.5
80°-90°	22.2	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1322.1	31.5
0°-40°	2147.5	51.1
0°-60°	3631.0	86.4
0°-90°	4202.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4202.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1716	
5°	1709	163
15°	1640	463
25°	1513	696
35°	1322	825
45°	1070	821
55°	738	662
65°	402	401
75°	135	149
85°	18	22
90°	0	



TEST NUMBER: P204798

CATALOG NUMBER: LE\_6B30D010 EC6B30508040 6LBCSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1716.4
2.5°	1716.4
5°	1708.8
7.5°	1703.8
10°	1688.4
12.5°	1663.0
15°	1640.0
17.5°	1614.5
20°	1584.0
22.5°	1553.5
25°	1512.8
27.5°	1469.4
30°	1421.0
32.5°	1375.1
35°	1321.8
37.5°	1265.6
40°	1199.5
42.5°	1135.8
45°	1069.6
47.5°	995.8
50°	914.2
52.5°	830.2
55°	738.5
57.5°	657.0
60°	565.4
62.5°	483.9
65°	402.4
67.5°	326.0
70°	254.6
72.5°	191.0
75°	135.0
77.5°	86.6
80°	50.9
82.5°	30.5
85°	17.9
87.5°	7.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)