

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202537

Luminaire Tested: **LE_6B30D010 EC6B30509050 6LBSWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202537
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B30D010 EC6B30509050 6LBSWMH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM
WATTAGE D010TR-27.4 W DE010-27.95 W D5LT-27.65 W DMX-27.73 W DL2-29.56 W
DL3-29.67 W DLE-29.73 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3383.0 lumens
Efficiency: N/A
Efficacy: 120.8 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 28
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202537

CATALOG NUMBER: LE_6B30D010 EC6B30509050 6LBSWMH1

Luminous Intensity Polar Plot

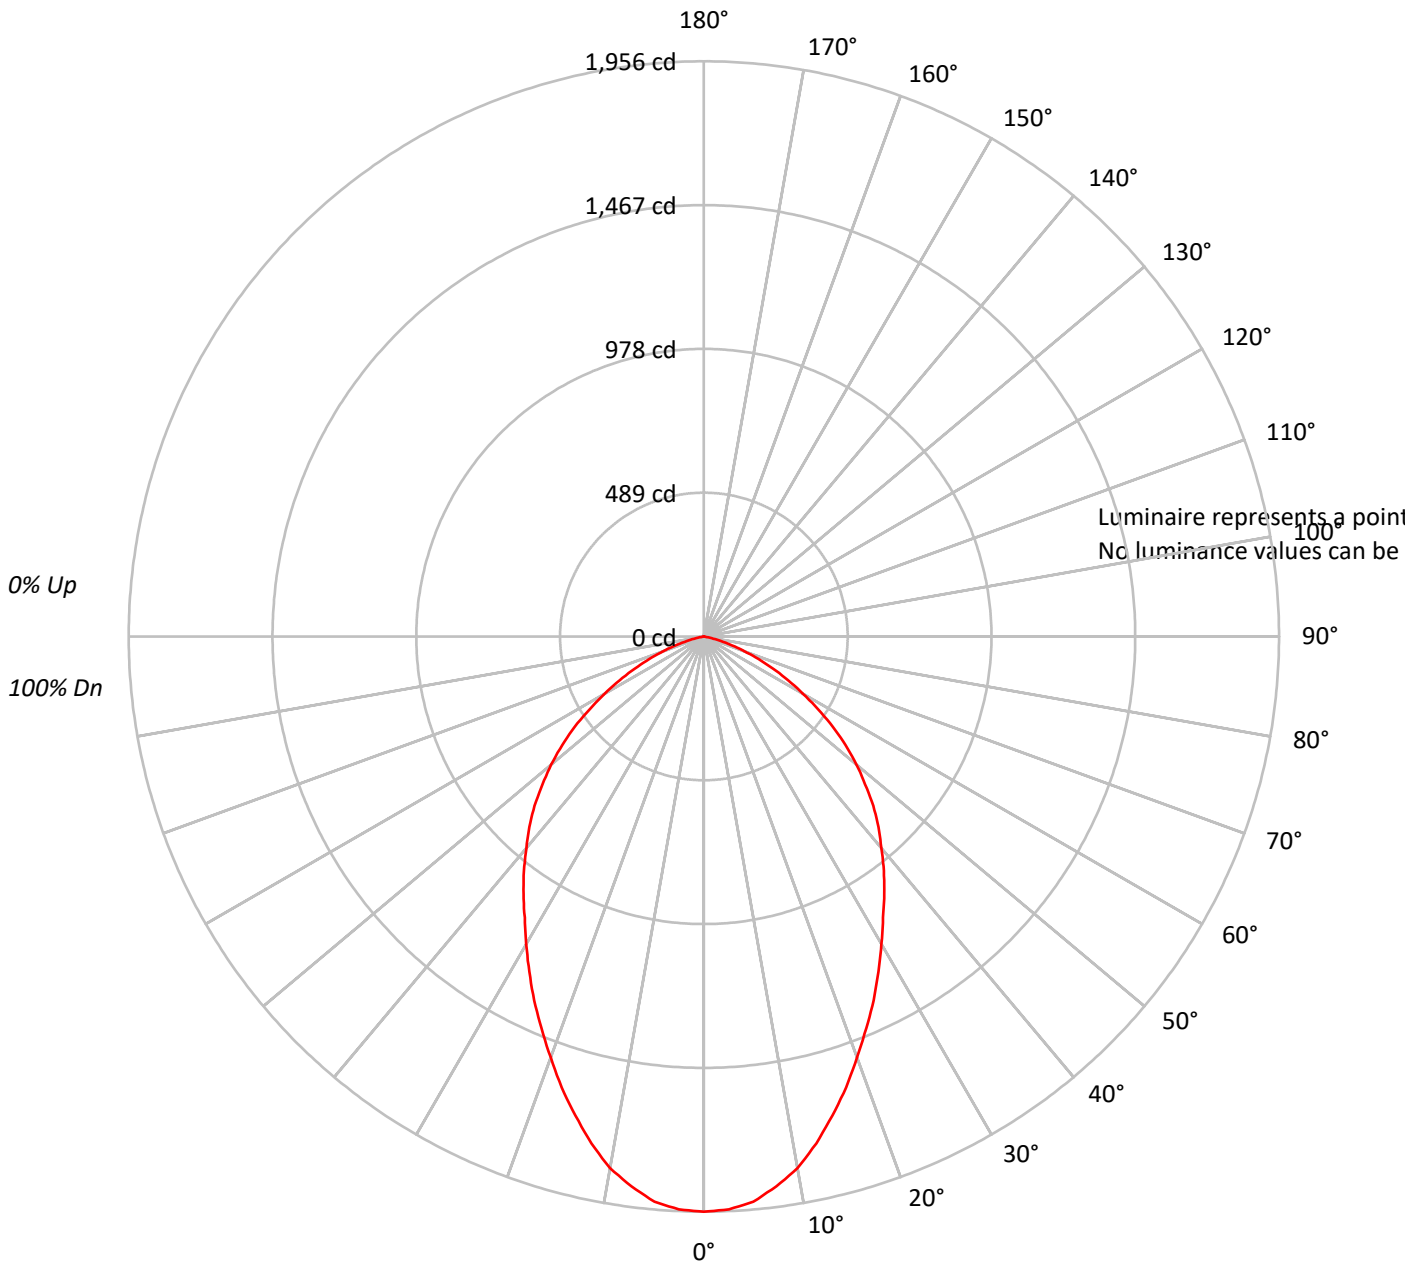



TEST NUMBER: P202537

CATALOG NUMBER: LE_6B30D010 EC6B30509050 6LBSWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88				88
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	81	79	77				77
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67				67
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59				59
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52				52
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	53	48	47				47
7	70	58	50	45	69	57	50	45	56	49	44	55	48	44	53	48	44	42				42
8	66	54	46	40	64	53	45	40	52	45	40	50	44	40	49	44	40	38				38
9	62	49	42	37	61	49	42	37	48	41	37	47	41	36	46	40	36	35				35
10	58	46	39	34	57	45	38	34	45	38	34	44	38	33	43	37	33	32				32

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202537

CATALOG NUMBER: LE_6B30D010 EC6B30509050 6LBSWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	181.0	5.4
10°-20°	473.1	14.0
20°-30°	627.4	18.5
30°-40°	669.2	19.8
40°-50°	625.5	18.5
50°-60°	477.0	14.1
60°-70°	259.4	7.7
70°-80°	69.6	2.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1281.5	37.9
0°-40°	1950.7	57.7
0°-60°	3053.2	90.3
0°-90°	3383.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3383.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1956	
5°	1929	181
15°	1687	473
25°	1366	627
35°	1069	669
45°	814	626
55°	537	477
65°	259	259
75°	60	70
85°	0	1
90°	0	



TEST NUMBER: P202537

CATALOG NUMBER: LE_6B30D010 EC6B30509050 6LBSWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1956.2
2.5°	1950.1
5°	1929.4
7.5°	1885.9
10°	1836.1
12.5°	1765.6
15°	1686.9
17.5°	1608.1
20°	1523.1
22.5°	1442.4
25°	1365.6
27.5°	1284.9
30°	1208.1
32.5°	1133.6
35°	1069.4
37.5°	1005.1
40°	938.8
42.5°	878.6
45°	814.4
47.5°	744.0
50°	677.6
52.5°	607.2
55°	536.8
57.5°	460.1
60°	389.6
62.5°	323.2
65°	259.0
67.5°	201.0
70°	147.1
72.5°	101.5
75°	60.1
77.5°	27.0
80°	6.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)