

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203261

Luminaire Tested: **LE_6B40D010 EC6B30508027 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203261
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B40D010 EC6B30508027 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3651.4 lumens
Efficiency: N/A
Efficacy: 87.4 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203261

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMH1

Luminous Intensity Polar Plot

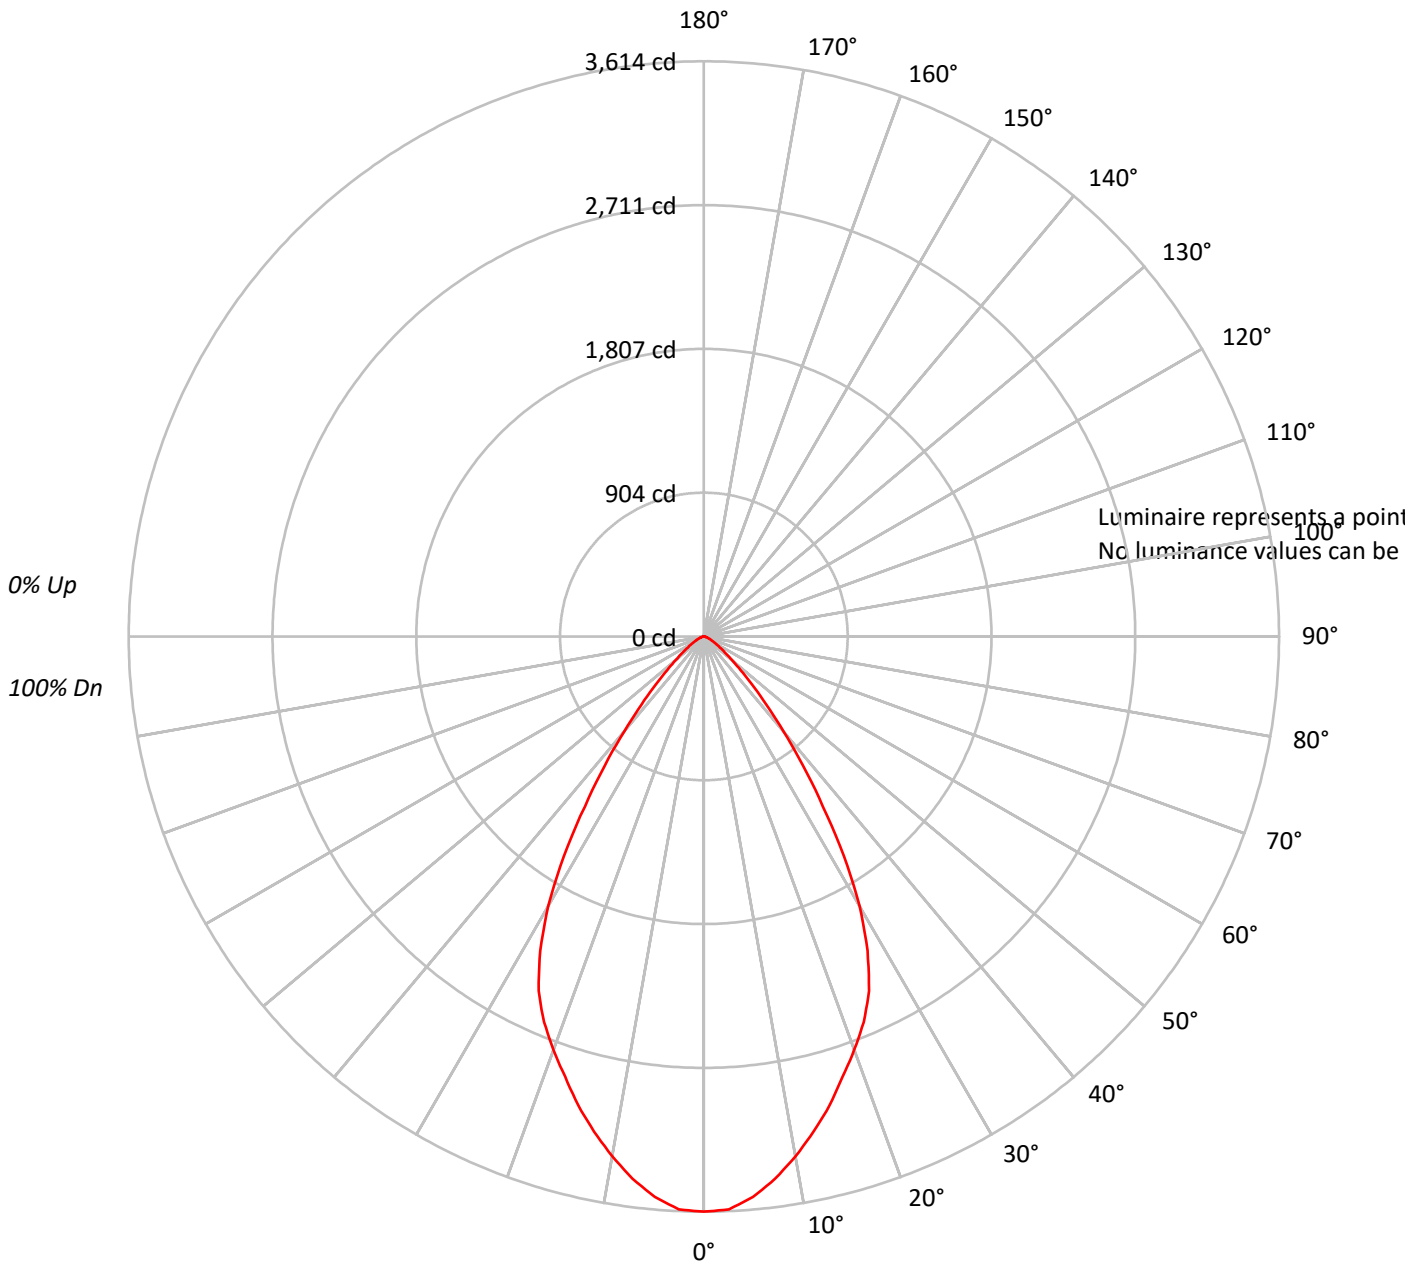



TEST NUMBER: P203261

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92		
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85		
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78		
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72		
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66		
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61		
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57		
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53		
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49		
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203261

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	330.4	9.0
10°-20°	854.7	23.4
20°-30°	1107.5	30.3
30°-40°	822.2	22.5
40°-50°	347.1	9.5
50°-60°	123.3	3.4
60°-70°	47.6	1.3
70°-80°	16.5	0.5
80°-90°	2.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2292.6	62.8
0°-40°	3114.8	85.3
0°-60°	3585.2	98.2
0°-90°	3651.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3651.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3614	
5°	3535	330
15°	3050	855
25°	2456	1108
35°	1304	822
45°	428	347
55°	130	123
65°	47	48
75°	16	16
85°	0	2
90°	0	



TEST NUMBER: P203261

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3613.5
2.5°	3603.0
5°	3535.2
7.5°	3436.2
10°	3316.2
12.5°	3185.9
15°	3050.4
17.5°	2899.1
20°	2763.5
22.5°	2622.8
25°	2455.9
27.5°	2226.5
30°	1955.4
32.5°	1637.2
35°	1303.6
37.5°	1022.0
40°	776.9
42.5°	578.8
45°	427.6
47.5°	312.9
50°	229.4
52.5°	172.1
55°	130.4
57.5°	99.1
60°	78.2
62.5°	57.4
65°	46.9
67.5°	36.5
70°	26.1
72.5°	20.9
75°	15.6
77.5°	10.4
80°	5.2
82.5°	5.2
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)