

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203570

Luminaire Tested: **LE_6B40D010 EC6B30508027 6LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203570
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B40D010 EC6B30508027 6LBMMW1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4006.2 lumens
Efficiency: N/A
Efficacy: 95.8 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203570

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMMW1

Luminous Intensity Polar Plot

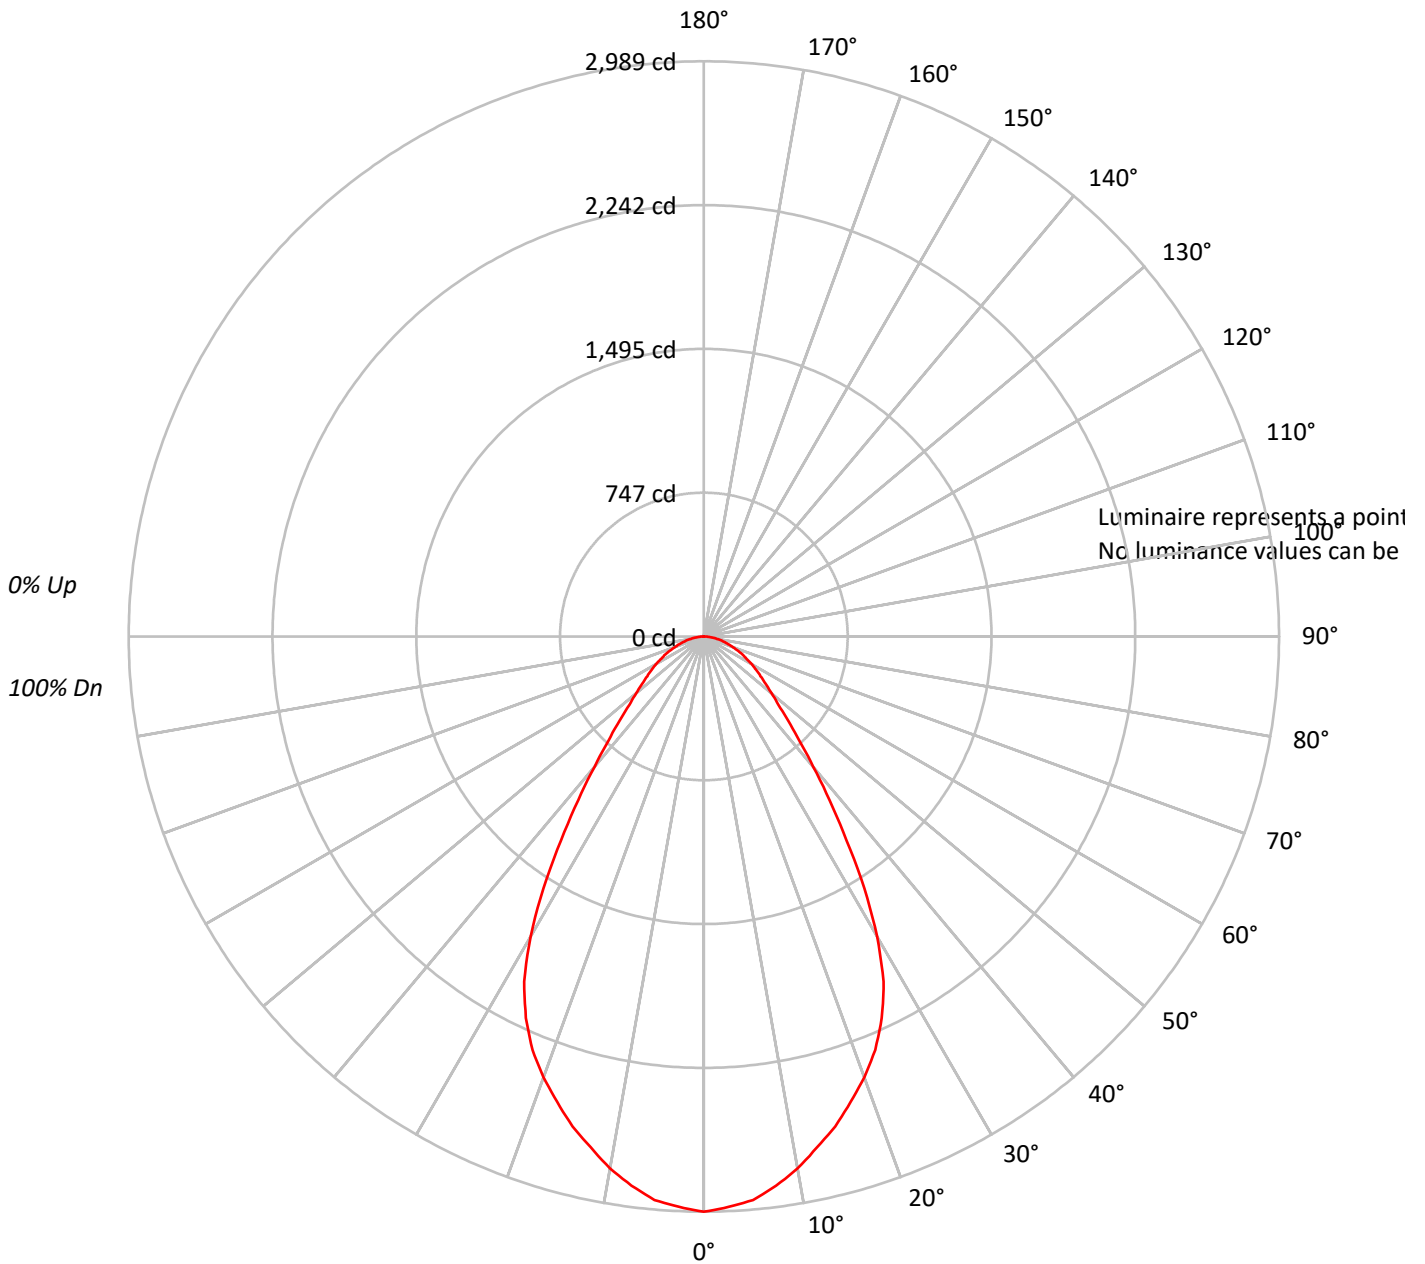



TEST NUMBER: P203570

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	92	91	89			89
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			79
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71			71
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64			64
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58			58
6	79	68	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53			53
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48			48
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			44
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41			41
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38			38

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203570

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.1	6.9
10°-20°	739.7	18.5
20°-30°	993.2	24.8
30°-40°	814.7	20.3
40°-50°	489.2	12.2
50°-60°	325.1	8.1
60°-70°	217.9	5.4
70°-80°	117.3	2.9
80°-90°	33.0	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2008.9	50.1
0°-40°	2823.6	70.5
0°-60°	3638.0	90.8
0°-90°	4006.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4006.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2989	
5°	2940	276
15°	2636	740
25°	2188	993
35°	1293	815
45°	619	489
55°	359	325
65°	221	218
75°	110	117
85°	28	33
90°	0	



TEST NUMBER: P203570

CATALOG NUMBER: LE_6B40D010 EC6B30508027 6LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2989.2
2.5°	2967.1
5°	2939.5
7.5°	2878.8
10°	2807.0
12.5°	2718.5
15°	2635.6
17.5°	2536.2
20°	2436.8
22.5°	2326.2
25°	2188.1
27.5°	2022.4
30°	1801.2
32.5°	1552.6
35°	1293.0
37.5°	1072.0
40°	884.1
42.5°	734.9
45°	618.9
47.5°	524.9
50°	458.6
52.5°	403.4
55°	359.1
57.5°	320.5
60°	287.4
62.5°	248.6
65°	221.0
67.5°	187.9
70°	160.2
72.5°	132.6
75°	110.5
77.5°	88.4
80°	66.2
82.5°	49.8
85°	27.6
87.5°	11.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)