

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204503

Luminaire Tested: **LE\_6B40D010 EC6B30509027 6LBSB1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204503  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B40D010 EC6B30509027 6LBSB1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH SPECULAR BLACK TRIM  
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57  
W DL3-44.71 W DLE-39.33 W  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3926.6 lumens  
Efficiency: N/A  
Efficacy: 93.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.2 / 1.3  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct

Input Watts (W): 41.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204503  
CATALOG NUMBER: LE\_6B40D010 EC6B30509027 6LBSB1

### Luminous Intensity Polar Plot

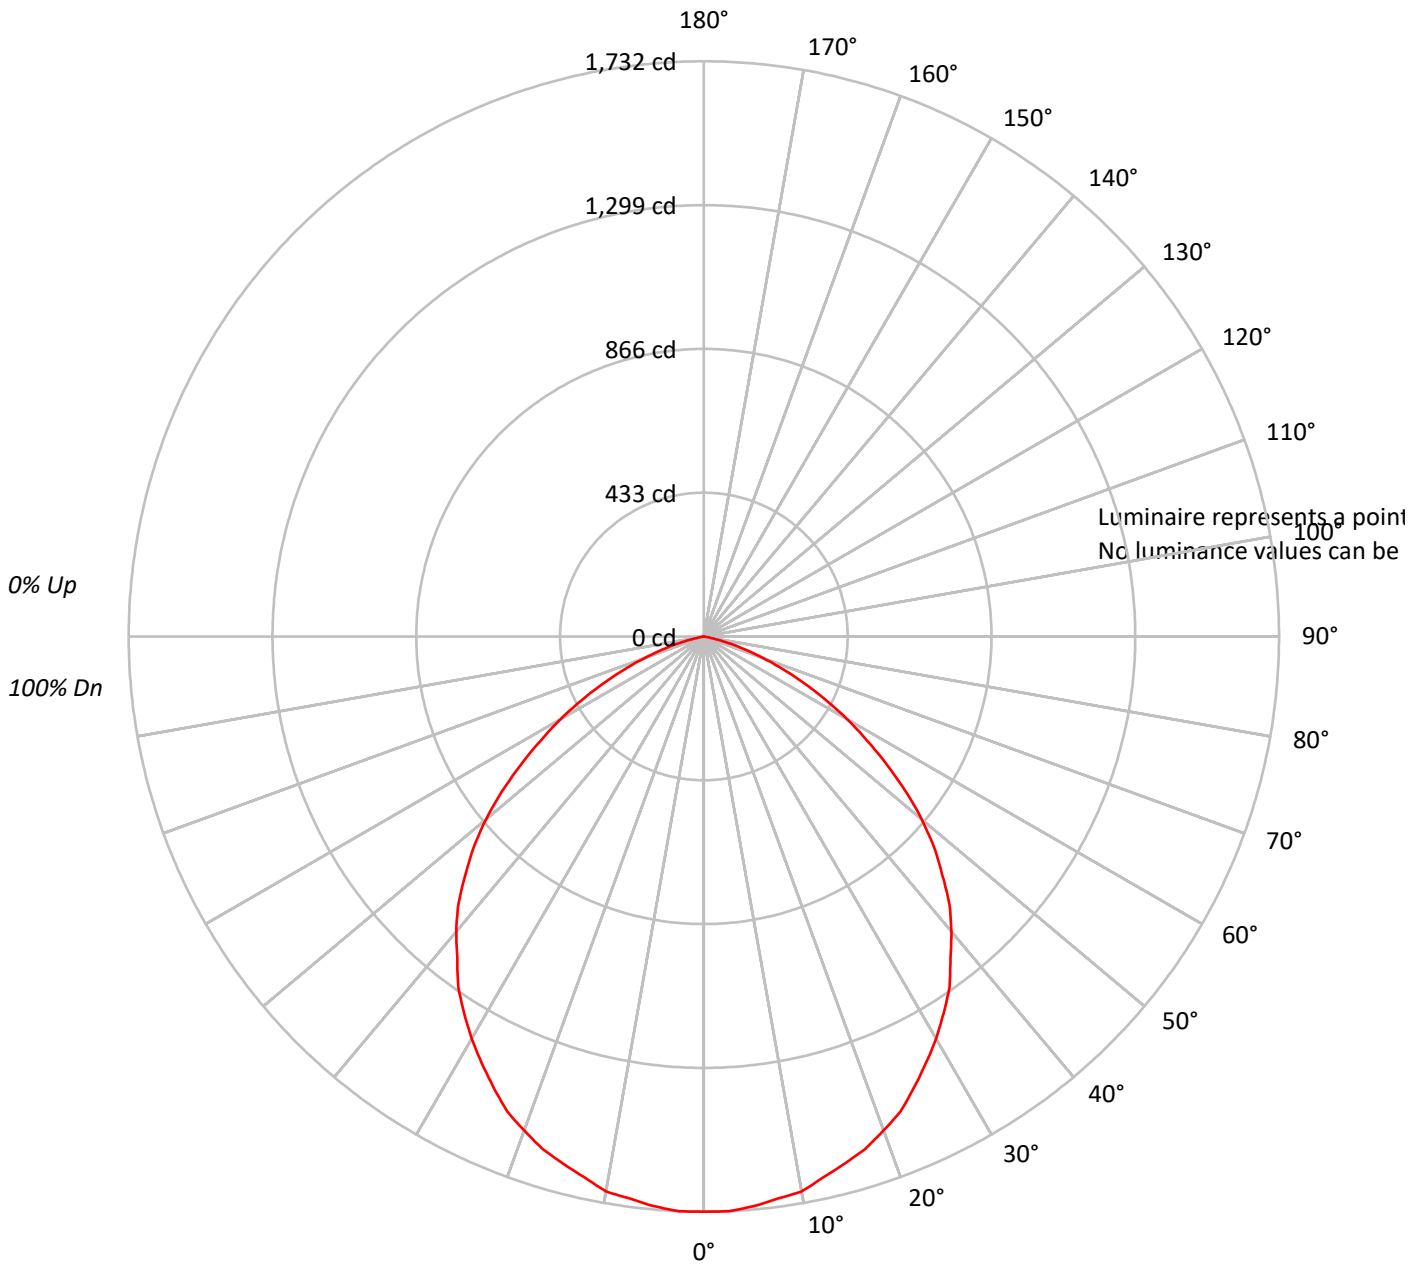



TEST NUMBER: P204503

CATALOG NUMBER: LE\_6B40D010 EC6B30509027 6LBSB1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	103	100	108	105	101	98	100	98	95	97	94	93	93	91	90	88			
2	102	95	89	84	100	93	88	83	90	85	81	86	83	79	84	80	78	76			
3	94	84	77	72	91	83	76	71	80	74	70	77	73	68	75	71	67	65			
4	86	76	68	62	84	74	67	61	72	65	60	70	64	60	68	63	59	57			
5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	56	52	50			
6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	56	50	46	44			
7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	51	45	41	39			
8	64	51	43	38	63	51	43	38	49	42	37	48	42	37	47	41	37	35			
9	60	47	39	34	59	47	39	34	46	39	34	45	38	34	44	38	34	32			
10	56	44	36	31	55	43	36	31	42	36	31	41	35	31	40	35	31	29			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204503

CATALOG NUMBER: LE\_6B40D010 EC6B30509027 6LBSB1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	163.5	4.2
10°-20°	463.9	11.8
20°-30°	690.0	17.6
30°-40°	803.0	20.4
40°-50°	782.7	19.9
50°-60°	602.0	15.3
60°-70°	332.8	8.5
70°-80°	88.1	2.2
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1317.3	33.5
0°-40°	2120.3	54.0
0°-60°	3505.0	89.3
0°-90°	3926.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3926.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1732	
5°	1722	163
15°	1642	464
25°	1498	690
35°	1289	803
45°	1015	783
55°	672	602
65°	334	333
75°	75	88
85°	0	1
90°	0	



TEST NUMBER: P204503

CATALOG NUMBER: LE\_6B40D010 EC6B30509027 6LBSB1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1732.1
2.5°	1732.1
5°	1722.1
7.5°	1707.2
10°	1697.2
12.5°	1667.4
15°	1642.5
17.5°	1617.6
20°	1582.8
22.5°	1548.0
25°	1498.1
27.5°	1448.4
30°	1398.6
32.5°	1343.9
35°	1289.1
37.5°	1219.5
40°	1159.8
42.5°	1095.0
45°	1015.4
47.5°	940.8
50°	856.1
52.5°	766.5
55°	672.0
57.5°	582.4
60°	497.8
62.5°	413.1
65°	333.5
67.5°	258.9
70°	189.1
72.5°	129.4
75°	74.6
77.5°	34.9
80°	5.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)