

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205523

Luminaire Tested: **LE_6B40D010 EC6B30508030 6LBMGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205523
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B40D010 EC6B30508030 6LBMGPH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH GRAPHITE HAZE TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2913.7 lumens
Efficiency: N/A
Efficacy: 69.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205523

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBMGPH1

Luminous Intensity Polar Plot

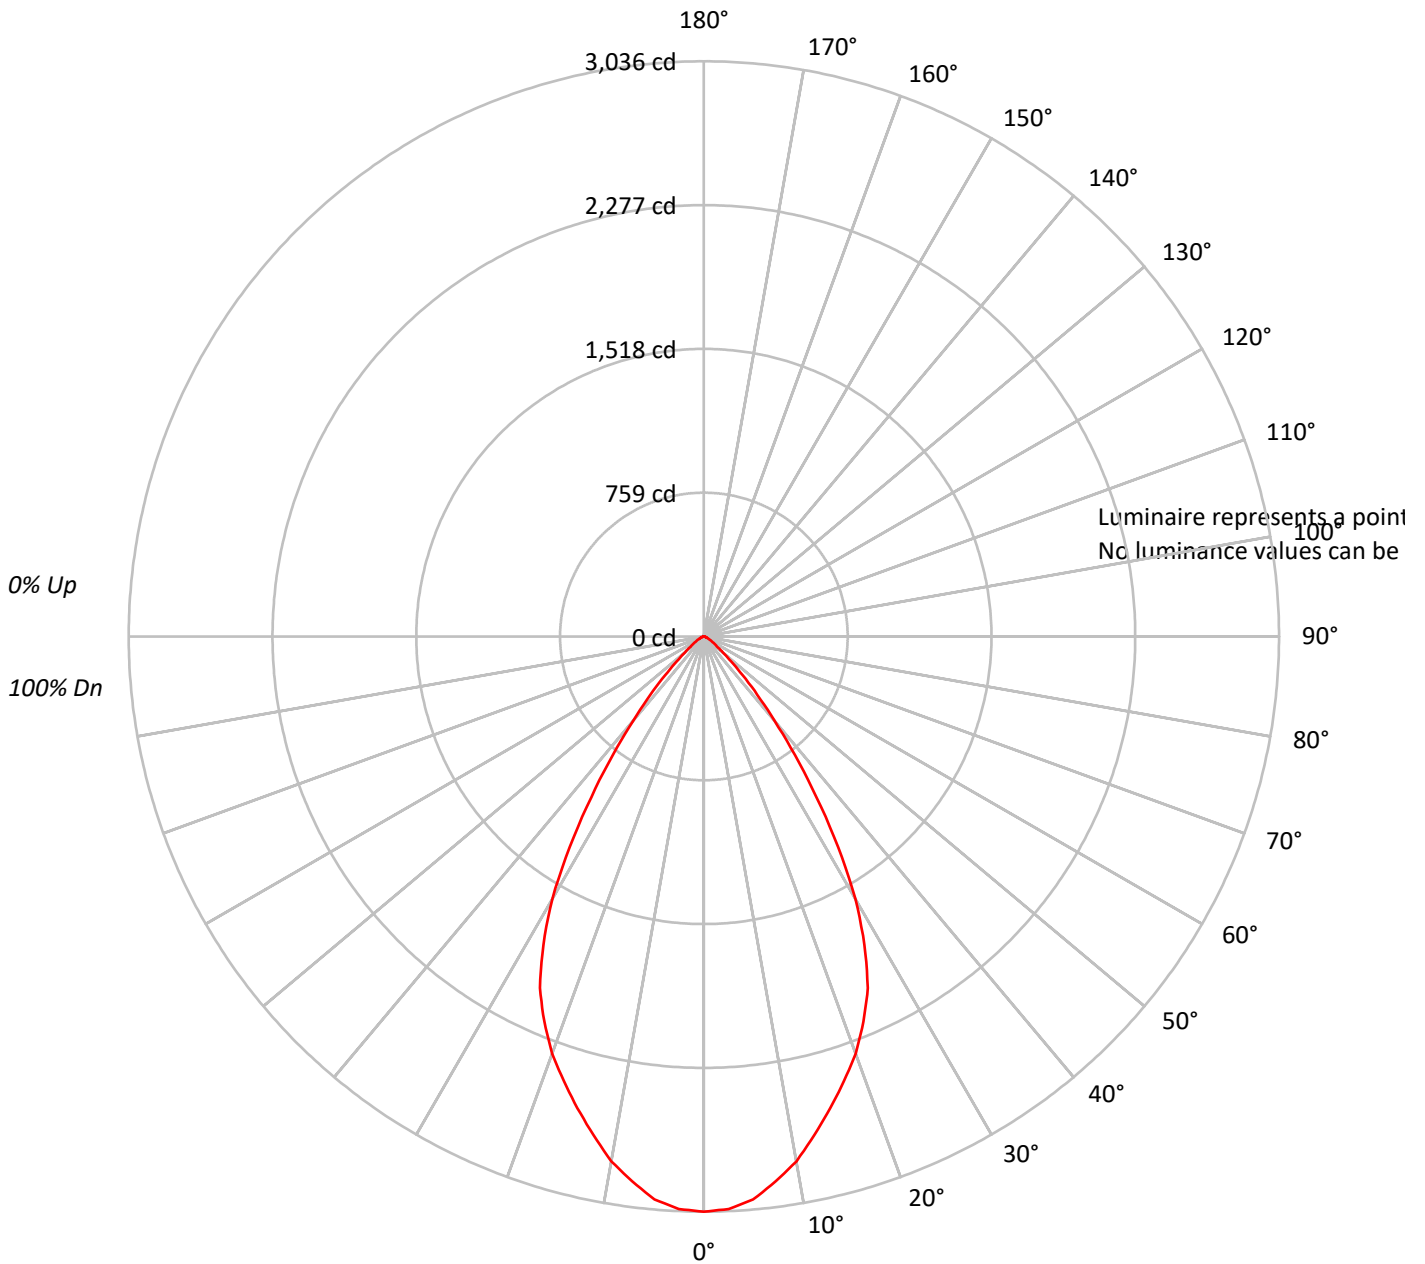



TEST NUMBER: P205523

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBMGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 101 | 100 | 99 | 98 | 97 | 96 | 95 | 93 | | | |
| 2 | 107 | 102 | 98 | 94 | 105 | 100 | 97 | 93 | 97 | 94 | 91 | 94 | 92 | 89 | 91 | 89 | 87 | 86 | | | |
| 3 | 102 | 95 | 90 | 85 | 100 | 93 | 89 | 85 | 91 | 87 | 83 | 88 | 85 | 82 | 86 | 83 | 81 | 79 | | | |
| 4 | 96 | 88 | 82 | 78 | 94 | 87 | 82 | 77 | 85 | 80 | 77 | 83 | 79 | 76 | 81 | 78 | 75 | 73 | | | |
| 5 | 91 | 82 | 76 | 72 | 89 | 81 | 76 | 71 | 79 | 74 | 71 | 78 | 73 | 70 | 76 | 72 | 69 | 68 | | | |
| 6 | 86 | 77 | 71 | 66 | 85 | 76 | 70 | 66 | 74 | 69 | 65 | 73 | 68 | 65 | 72 | 68 | 64 | 63 | | | |
| 7 | 82 | 72 | 66 | 61 | 80 | 71 | 65 | 61 | 70 | 65 | 61 | 69 | 64 | 60 | 68 | 63 | 60 | 59 | | | |
| 8 | 77 | 68 | 61 | 57 | 76 | 67 | 61 | 57 | 66 | 60 | 57 | 65 | 60 | 56 | 64 | 59 | 56 | 55 | | | |
| 9 | 74 | 64 | 57 | 53 | 72 | 63 | 57 | 53 | 62 | 57 | 53 | 61 | 56 | 53 | 60 | 56 | 53 | 51 | | | |
| 10 | 70 | 60 | 54 | 50 | 69 | 59 | 54 | 50 | 59 | 53 | 50 | 58 | 53 | 49 | 57 | 53 | 49 | 48 | | | |

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205523

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBMGPH1

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 278.9 | 9.6 |
| 10°-20° | 723.8 | 24.8 |
| 20°-30° | 922.2 | 31.6 |
| 30°-40° | 651.7 | 22.4 |
| 40°-50° | 237.9 | 8.2 |
| 50°-60° | 65.9 | 2.3 |
| 60°-70° | 23.9 | 0.8 |
| 70°-80° | 8.5 | 0.3 |
| 80°-90° | 0.8 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1924.8 | 66.1 |
| 0°-40° | 2576.6 | 88.4 |
| 0°-60° | 2880.4 | 98.9 |
| 0°-90° | 2913.7 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 2913.7 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 3036 | |
| 5° | 2983 | 279 |
| 15° | 2577 | 724 |
| 25° | 2048 | 922 |
| 35° | 1036 | 652 |
| 45° | 288 | 238 |
| 55° | 71 | 66 |
| 65° | 24 | 24 |
| 75° | 6 | 9 |
| 85° | 0 | 1 |
| 90° | 0 | |



TEST NUMBER: P205523

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBMGPH1

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 3036.2 |
| 2.5° | 3024.5 |
| 5° | 2983.2 |
| 7.5° | 2900.9 |
| 10° | 2812.6 |
| 12.5° | 2694.9 |
| 15° | 2577.2 |
| 17.5° | 2459.6 |
| 20° | 2341.9 |
| 22.5° | 2200.6 |
| 25° | 2047.6 |
| 27.5° | 1835.9 |
| 30° | 1600.5 |
| 32.5° | 1318.0 |
| 35° | 1035.6 |
| 37.5° | 788.5 |
| 40° | 576.6 |
| 42.5° | 417.8 |
| 45° | 288.4 |
| 47.5° | 194.1 |
| 50° | 129.5 |
| 52.5° | 88.2 |
| 55° | 70.6 |
| 57.5° | 53.0 |
| 60° | 41.2 |
| 62.5° | 29.4 |
| 65° | 23.5 |
| 67.5° | 17.6 |
| 70° | 11.8 |
| 72.5° | 11.8 |
| 75° | 5.9 |
| 77.5° | 5.9 |
| 80° | 5.9 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)