

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202850

Luminaire Tested: **LE_6B40D010 EC6B30508030 6LBWWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202850
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B40D010 EC6B30508030 6LBWWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH WHEAT TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4774.4 lumens
Efficiency: N/A
Efficacy: 114.2 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202850

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBWWH1

Luminous Intensity Polar Plot

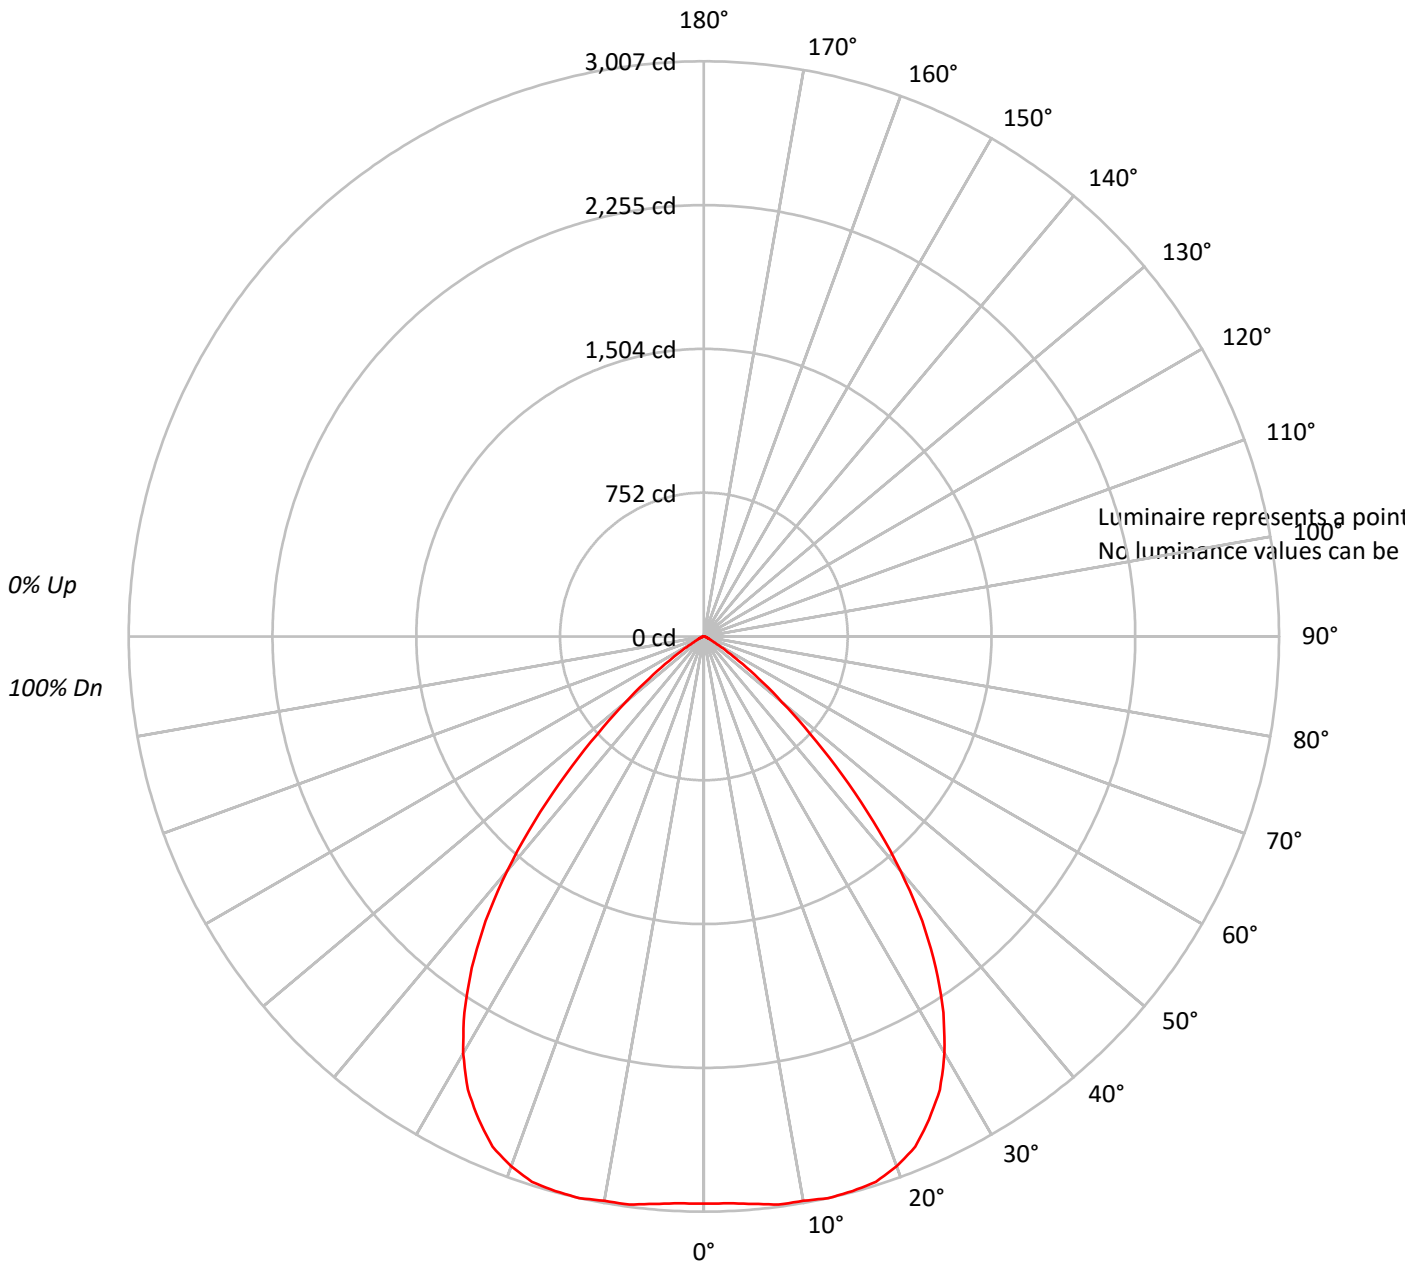



TEST NUMBER: P202850

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBWWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	109	107	104	110	107	105	102	103	101	99	99	98	96	96	95	93	92			
2	106	100	96	92	104	98	94	91	95	92	89	92	89	87	89	87	85	83			
3	99	92	86	81	97	90	85	81	88	83	79	85	81	78	83	80	77	75			
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68			
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	63	62			
6	82	71	64	59	80	71	64	59	69	63	59	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	54	49	71	61	54	49	59	53	49	58	53	49	57	52	49	47			
9	68	57	50	45	67	56	50	45	55	49	45	54	49	45	53	48	45	43			
10	64	53	46	42	63	53	46	42	52	46	42	51	45	42	50	45	41	40			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202850

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBWWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	285.0	6.0
10°-20°	847.6	17.8
20°-30°	1275.9	26.7
30°-40°	1304.6	27.3
40°-50°	792.3	16.6
50°-60°	223.1	4.7
60°-70°	33.9	0.7
70°-80°	11.1	0.2
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2408.6	50.4
0°-40°	3713.2	77.8
0°-60°	4728.6	99.0
0°-90°	4774.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4774.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2965	
5°	2977	285
15°	3001	848
25°	2786	1276
35°	2115	1305
45°	1018	792
55°	222	223
65°	30	34
75°	12	11
85°	0	1
90°	0	



TEST NUMBER: P202850

CATALOG NUMBER: LE_6B40D010 EC6B30508030 6LBWWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2965.4
2.5°	2965.4
5°	2977.4
7.5°	2995.4
10°	2995.4
12.5°	3007.4
15°	3001.4
17.5°	2989.4
20°	2947.4
22.5°	2887.5
25°	2785.6
27.5°	2671.9
30°	2516.1
32.5°	2330.4
35°	2114.8
37.5°	1875.1
40°	1599.5
42.5°	1312.0
45°	1018.4
47.5°	754.9
50°	533.1
52.5°	359.5
55°	221.6
57.5°	131.8
60°	65.9
62.5°	41.9
65°	30.0
67.5°	24.0
70°	18.0
72.5°	12.0
75°	12.0
77.5°	6.0
80°	6.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)