

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203062

Luminaire Tested: **LE_6B40D010 EC6B30509030 6LBWB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203062
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B40D010 EC6B30509030 6LBWB1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR BLACK TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2508.8 lumens
Efficiency: N/A
Efficacy: 60.0 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203062

CATALOG NUMBER: LE_6B40D010 EC6B30509030 6LBWB1

Luminous Intensity Polar Plot

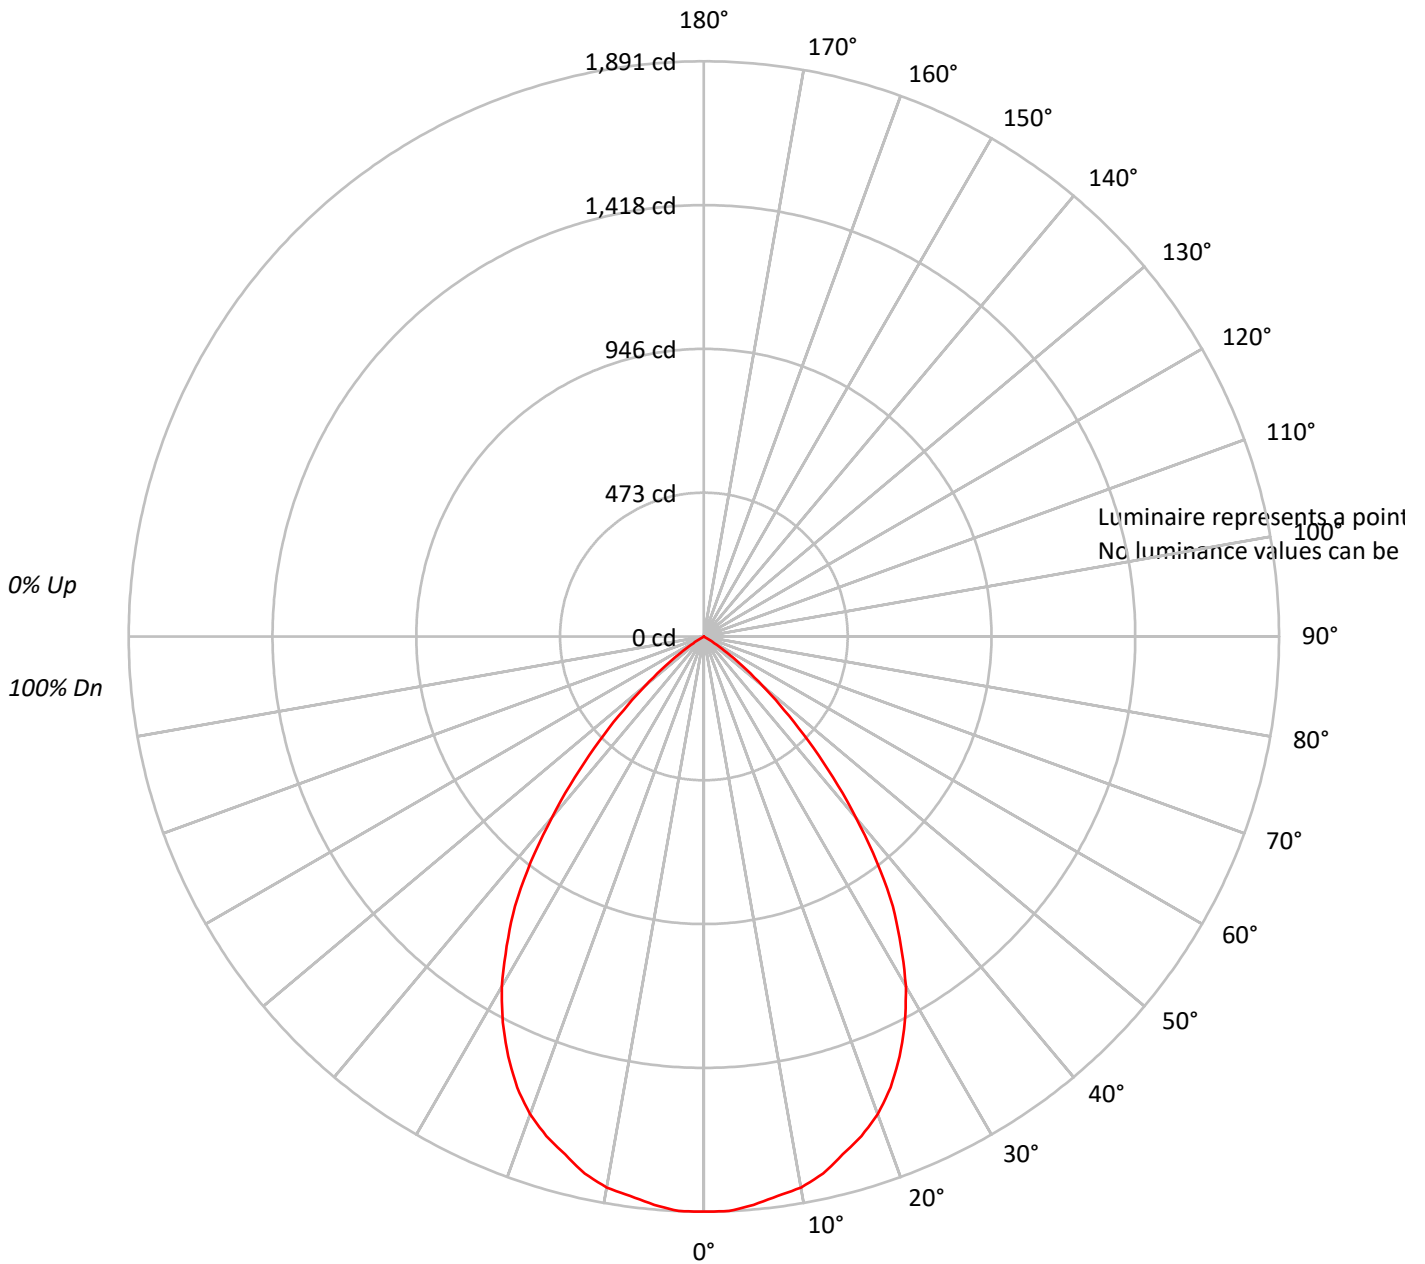



TEST NUMBER: P203062

CATALOG NUMBER: LE_6B40D010 EC6B30509030 6LBWB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77	77	77	77
4	94	86	79	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70	70	70	70
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64	64	64	64
6	83	73	67	62	82	72	66	61	71	65	61	69	64	61	68	64	60	59	59	59	59
7	78	68	61	56	77	67	61	56	66	60	56	65	60	56	63	59	55	54	54	54	54
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50	50	50	50
9	70	59	52	48	69	58	52	48	57	52	48	57	51	47	56	51	47	46	46	46	46
10	66	55	49	44	65	55	49	44	54	48	44	53	48	44	52	47	44	42	42	42	42

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203062

CATALOG NUMBER: LE_6B40D010 EC6B30509030 6LBWB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	177.8	7.1
10°-20°	497.1	19.8
20°-30°	696.4	27.8
30°-40°	665.0	26.5
40°-50°	378.8	15.1
50°-60°	92.5	3.7
60°-70°	1.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1371.2	54.7
0°-40°	2036.3	81.2
0°-60°	2507.6	100.0
0°-90°	2508.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2508.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1891	
5°	1876	178
15°	1763	497
25°	1523	696
35°	1083	665
45°	486	379
55°	92	93
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P203062

CATALOG NUMBER: LE_6B40D010 EC6B30509030 6LBWB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	1890.8
2.5°	1890.8
5°	1875.5
7.5°	1855.0
10°	1839.6
12.5°	1809.0
15°	1763.0
17.5°	1722.1
20°	1671.0
22.5°	1604.6
25°	1522.9
27.5°	1430.9
30°	1328.6
32.5°	1206.0
35°	1083.4
37.5°	935.1
40°	776.8
42.5°	628.5
45°	485.5
47.5°	357.8
50°	250.4
52.5°	158.4
55°	92.0
57.5°	40.9
60°	10.2
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)