

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204190

Luminaire Tested: **LE_6B40D010 EC6B30508035 6LBSH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204190
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B40D010 EC6B30508035 6LBSH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
WATTAGE D010TR-43.02 W DE010-42.54 W D5LT-42.539 W DMX-41.87 W DL2-41.57
W DL3-44.71 W DLE-39.33 W
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5573.2 lumens
Efficiency: N/A
Efficacy: 133.3 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 41.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204190

CATALOG NUMBER: LE_6B40D010 EC6B30508035 6LBSH1

Luminous Intensity Polar Plot

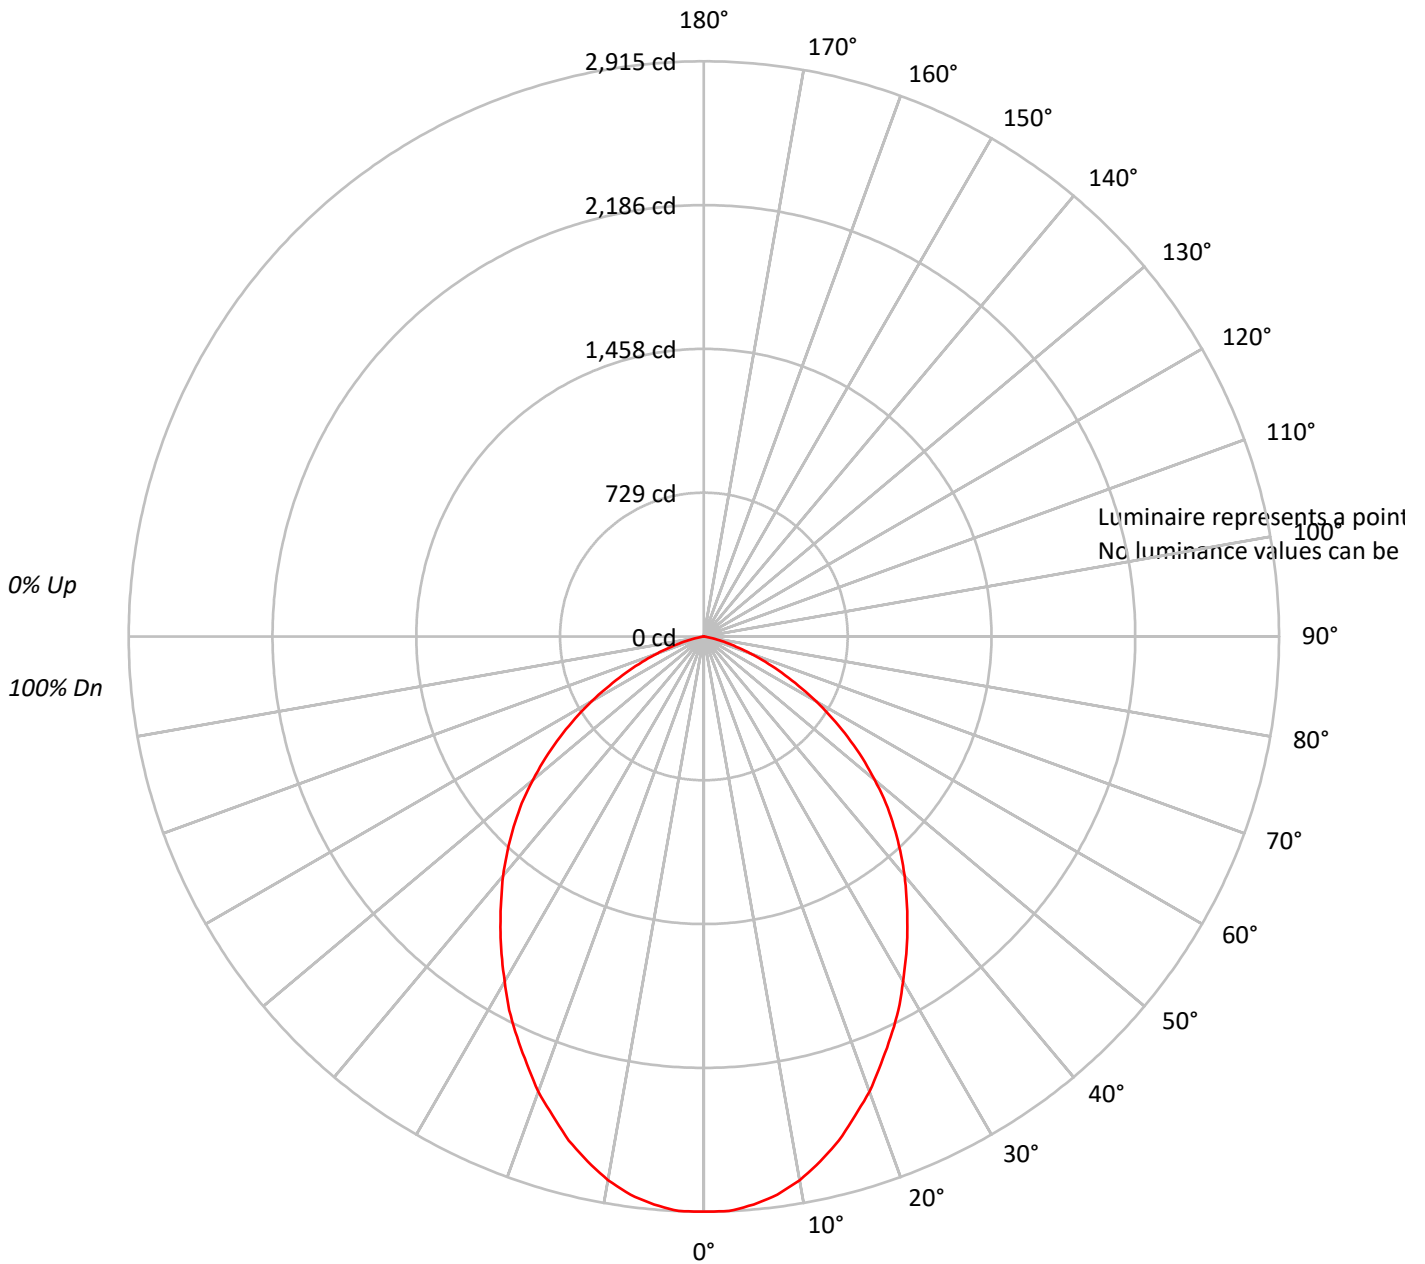



TEST NUMBER: P204190

CATALOG NUMBER: LE_6B40D010 EC6B30508035 6LBSH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88																			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77																			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67																			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58																			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51																			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46																			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41																			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37																			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34																			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204190

CATALOG NUMBER: LE_6B40D010 EC6B30508035 6LSH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	273.0	4.9
10°-20°	742.1	13.3
20°-30°	1030.6	18.5
30°-40°	1124.6	20.2
40°-50°	1049.1	18.8
50°-60°	796.3	14.3
60°-70°	436.0	7.8
70°-80°	120.0	2.2
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2045.6	36.7
0°-40°	3170.2	56.9
0°-60°	5015.6	90.0
0°-90°	5573.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5573.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2915	
5°	2890	273
15°	2645	742
25°	2240	1031
35°	1798	1125
45°	1362	1049
55°	890	796
65°	436	436
75°	104	120
85°	0	2
90°	0	



TEST NUMBER: P204190

CATALOG NUMBER: LE_6B40D010 EC6B30508035 6LBSH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2914.8
2.5°	2914.8
5°	2890.2
7.5°	2853.4
10°	2798.1
12.5°	2724.5
15°	2644.8
17.5°	2546.6
20°	2454.5
22.5°	2344.1
25°	2239.8
27.5°	2135.5
30°	2018.9
32.5°	1908.4
35°	1798.0
37.5°	1687.5
40°	1583.1
42.5°	1472.8
45°	1362.2
47.5°	1251.8
50°	1129.1
52.5°	1012.5
55°	889.8
57.5°	773.1
60°	656.6
62.5°	540.0
65°	435.6
67.5°	337.5
70°	251.6
72.5°	171.9
75°	104.4
77.5°	49.1
80°	12.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)