

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205438

Luminaire Tested: **LE\_6B50D010R EC6B30509027 6LBSLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205438  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B50D010R EC6B30509027 6LBSLI1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH SPECULAR CLEAR TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5916.6 lumens  
Efficiency: N/A  
Efficacy: 100.6 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1.04  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 58.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205438

CATALOG NUMBER: LE\_6B50D010R EC6B30509027 6LBSLI1

### Luminous Intensity Polar Plot

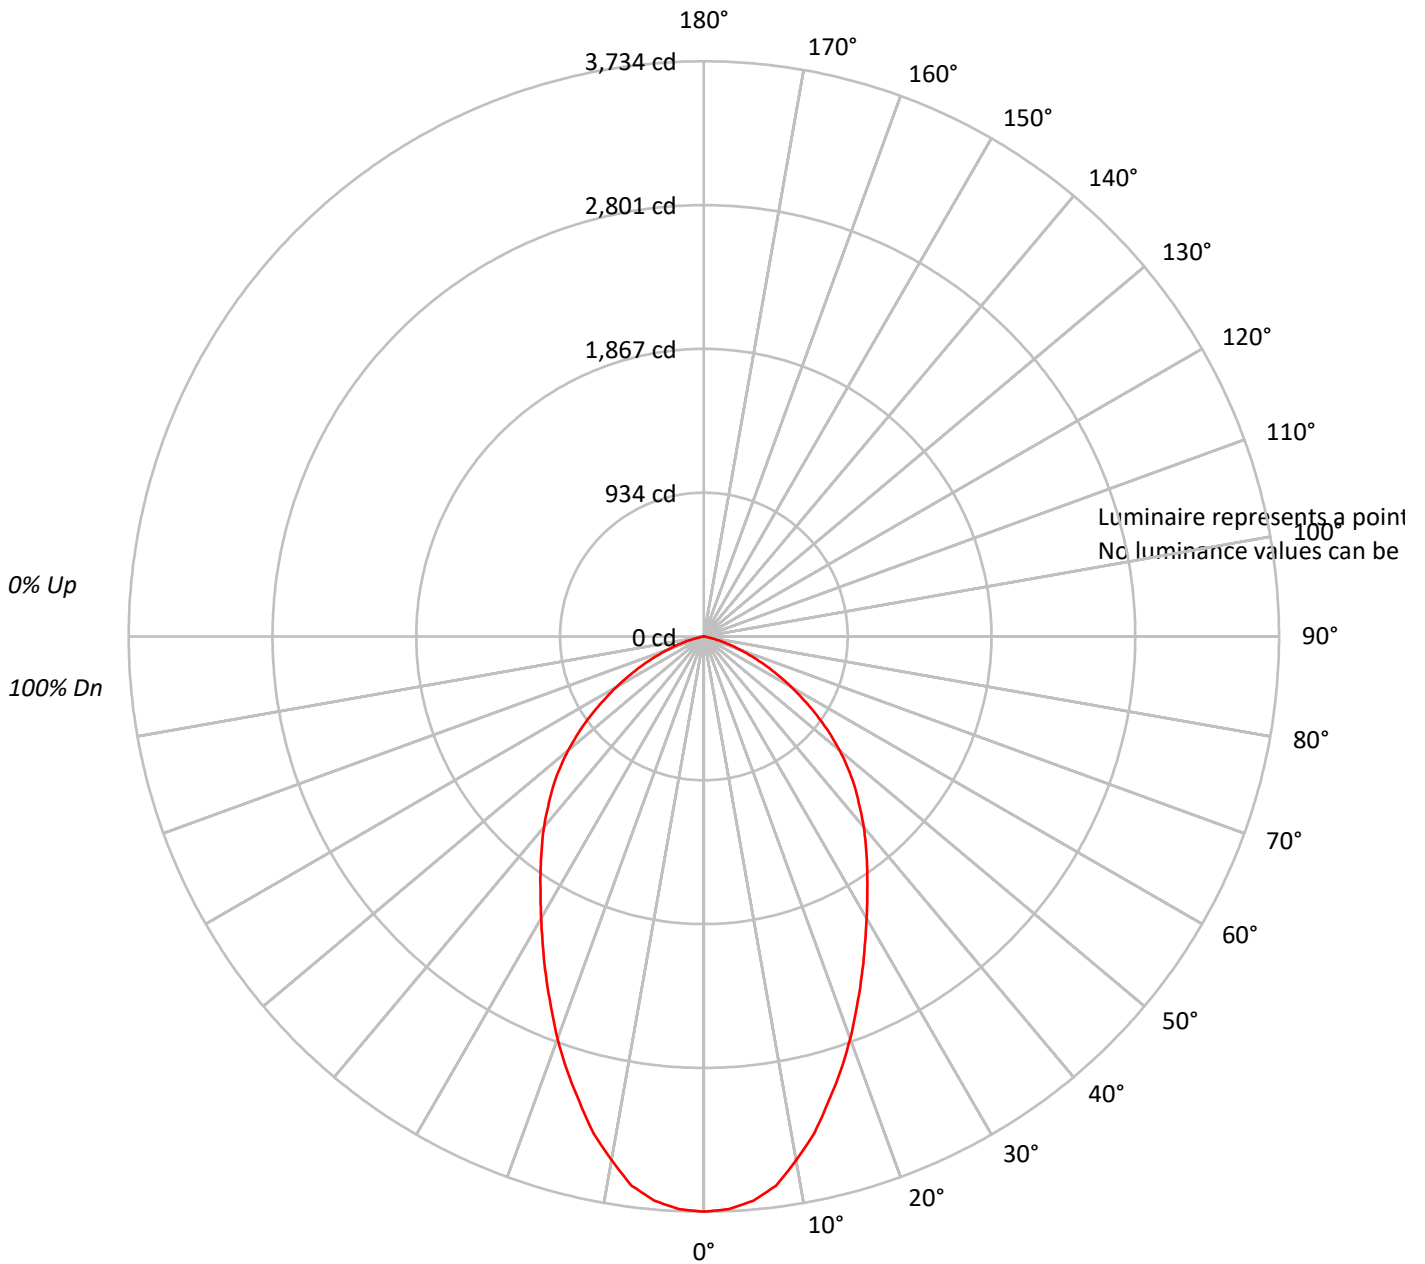



TEST NUMBER: P205438

CATALOG NUMBER: LE\_6B50D010R EC6B30509027 6LBSLI1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 111 | 107 | 104 | 101 | 109 | 105 | 102 | 99  | 101 | 99  | 96  | 97  | 95  | 93  | 94  | 92  | 91  | 89  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 103 | 96  | 91  | 86  | 100 | 94  | 89  | 85  | 91  | 87  | 83  | 88  | 84  | 81  | 85  | 82  | 79  | 77  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 95  | 86  | 79  | 74  | 93  | 85  | 78  | 73  | 82  | 76  | 72  | 79  | 75  | 71  | 77  | 73  | 70  | 68  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 88  | 78  | 70  | 64  | 86  | 77  | 69  | 64  | 74  | 68  | 63  | 72  | 67  | 62  | 70  | 65  | 62  | 60  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 82  | 71  | 63  | 57  | 80  | 70  | 62  | 57  | 67  | 61  | 56  | 66  | 60  | 55  | 64  | 59  | 55  | 53  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 76  | 64  | 56  | 51  | 74  | 63  | 56  | 51  | 62  | 55  | 50  | 60  | 54  | 50  | 59  | 53  | 49  | 47  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 71  | 59  | 51  | 46  | 70  | 58  | 51  | 45  | 57  | 50  | 45  | 55  | 49  | 45  | 54  | 49  | 45  | 43  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 67  | 54  | 47  | 41  | 65  | 54  | 46  | 41  | 52  | 46  | 41  | 51  | 45  | 41  | 50  | 45  | 41  | 39  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 63  | 50  | 43  | 38  | 61  | 50  | 43  | 38  | 49  | 42  | 38  | 48  | 42  | 37  | 47  | 41  | 37  | 36  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 59  | 47  | 40  | 35  | 58  | 46  | 39  | 35  | 45  | 39  | 35  | 45  | 39  | 34  | 44  | 38  | 34  | 33  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205438

CATALOG NUMBER: LE\_6B50D010R EC6B30509027 6LBSLI1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 344.1  | 5.8       |
| 10°-20°   | 875.9  | 14.8      |
| 20°-30°   | 1116.9 | 18.9      |
| 30°-40°   | 1158.3 | 19.6      |
| 40°-50°   | 1067.3 | 18.0      |
| 50°-60°   | 802.8  | 13.6      |
| 60°-70°   | 433.4  | 7.3       |
| 70°-80°   | 116.3  | 2.0       |
| 80°-90°   | 1.7    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 2336.8 | 39.5      |
| 0°-40°    | 3495.1 | 59.1      |
| 0°-60°    | 5365.2 | 90.7      |
| 0°-90°    | 5916.6 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 5916.6 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3734 |      |
| 5°  | 3677 | 344  |
| 15° | 3124 | 876  |
| 25° | 2426 | 1117 |
| 35° | 1848 | 1158 |
| 45° | 1389 | 1067 |
| 55° | 899  | 803  |
| 65° | 434  | 433  |
| 75° | 101  | 116  |
| 85° | 0    | 2    |
| 90° | 0    |      |



TEST NUMBER: P205438

CATALOG NUMBER: LE\_6B50D010R EC6B30509027 6LBSLI1

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 3733.6 |
| 2.5°  | 3721.0 |
| 5°    | 3677.0 |
| 7.5°  | 3595.4 |
| 10°   | 3450.8 |
| 12.5° | 3306.2 |
| 15°   | 3123.9 |
| 17.5° | 2954.2 |
| 20°   | 2778.2 |
| 22.5° | 2596.0 |
| 25°   | 2426.2 |
| 27.5° | 2262.8 |
| 30°   | 2112.0 |
| 32.5° | 1973.6 |
| 35°   | 1848.0 |
| 37.5° | 1728.5 |
| 40°   | 1615.4 |
| 42.5° | 1496.0 |
| 45°   | 1389.1 |
| 47.5° | 1269.6 |
| 50°   | 1150.2 |
| 52.5° | 1024.5 |
| 55°   | 898.9  |
| 57.5° | 773.1  |
| 60°   | 653.8  |
| 62.5° | 540.5  |
| 65°   | 433.8  |
| 67.5° | 333.1  |
| 70°   | 245.1  |
| 72.5° | 169.8  |
| 75°   | 100.6  |
| 77.5° | 44.0   |
| 80°   | 12.6   |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)