

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205239

Luminaire Tested: **LE\_6B50D010R EC6B30509727 6LBWLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205239  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B50D010R EC6B30509727 6LBWL1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4822.4 lumens  
Efficiency: N/A  
Efficacy: 82.0 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 58.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205239

CATALOG NUMBER: LE\_6B50D010R EC6B30509727 6LBWL11

### Luminous Intensity Polar Plot

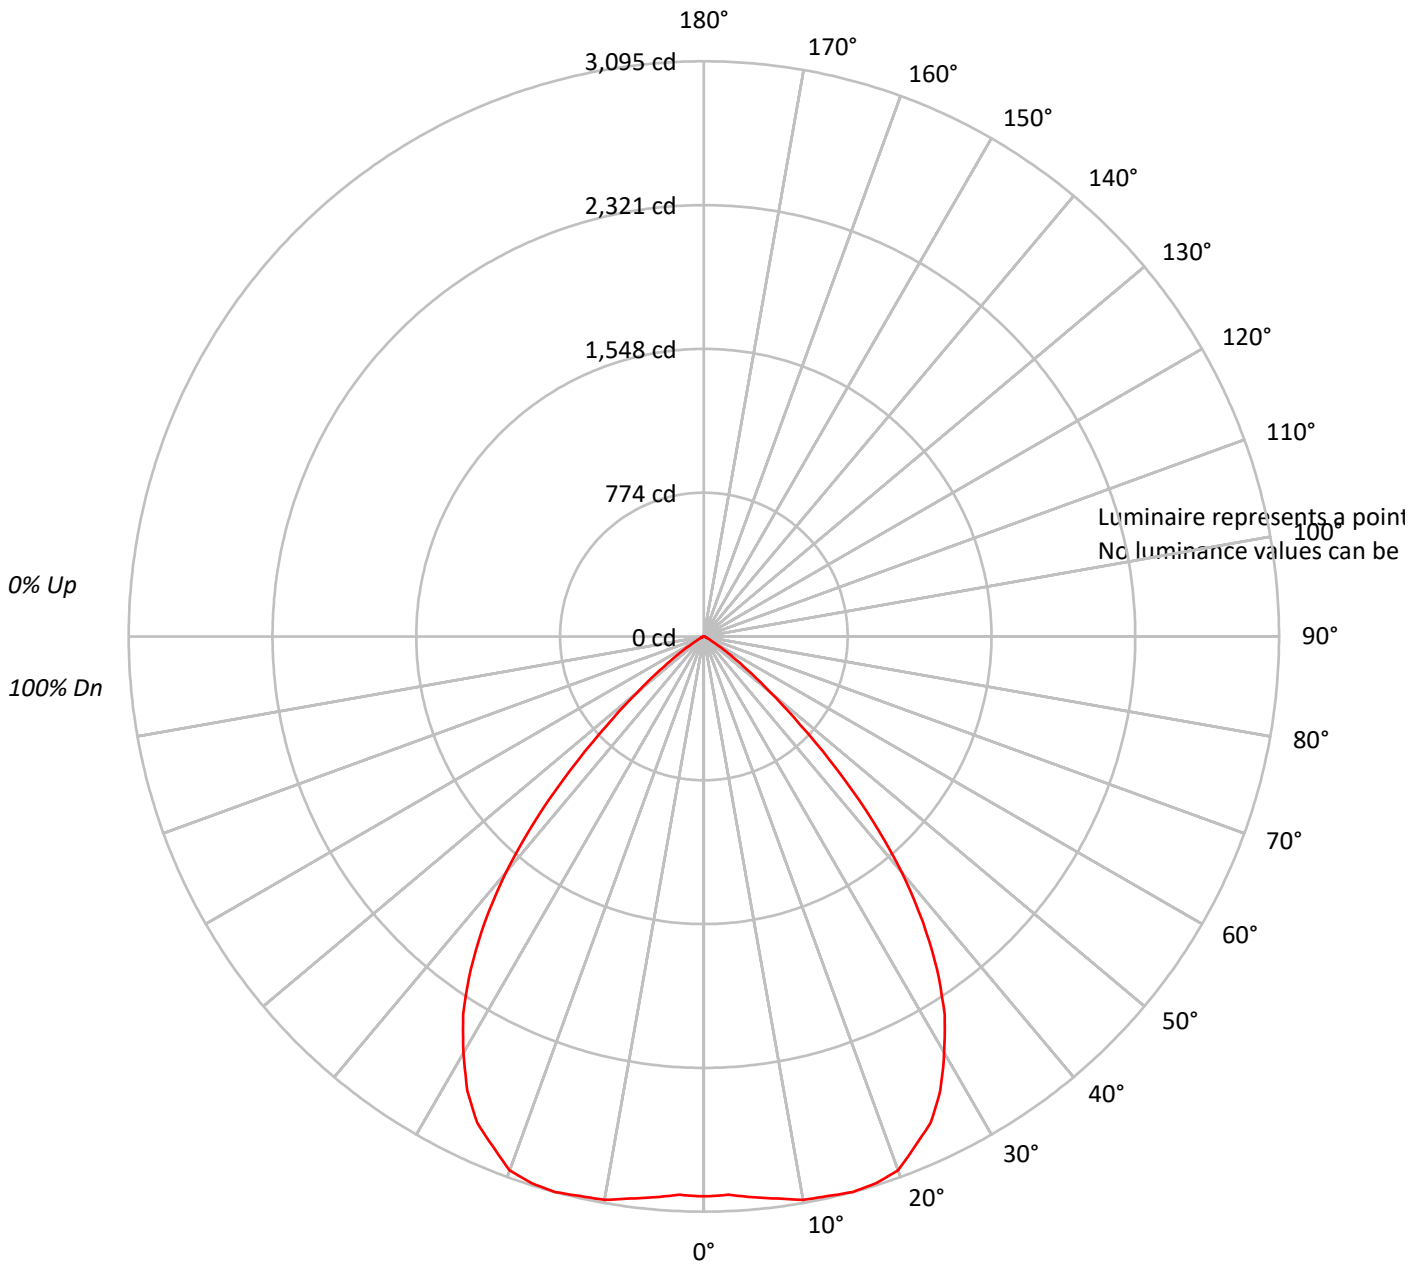



TEST NUMBER: P205239

CATALOG NUMBER: LE\_6B50D010R EC6B30509727 6LBWL11

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92																			
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83																			
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76																			
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69																			
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63																			
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57																			
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52																			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48																			
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44																			
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205239

CATALOG NUMBER: LE\_6B50D010R EC6B30509727 6LBWLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	290.6	6.0
10°-20°	873.6	18.1
20°-30°	1316.8	27.3
30°-40°	1347.8	27.9
40°-50°	785.2	16.3
50°-60°	180.4	3.7
60°-70°	22.2	0.5
70°-80°	5.8	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2481.0	51.4
0°-40°	3828.8	79.4
0°-60°	4794.4	99.4
0°-90°	4822.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4822.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3013	
5°	3029	291
15°	3095	874
25°	2887	1317
35°	2187	1348
45°	1012	785
55°	175	180
65°	16	22
75°	6	6
85°	0	0
90°	0	



TEST NUMBER: P205239

CATALOG NUMBER: LE\_6B50D010R EC6B30509727 6LBWL11

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3012.6
2.5°	3007.1
5°	3029.0
7.5°	3050.9
10°	3078.2
12.5°	3083.8
15°	3094.6
17.5°	3083.8
20°	3056.4
22.5°	2968.9
25°	2886.9
27.5°	2755.6
30°	2586.1
32.5°	2411.2
35°	2187.0
37.5°	1935.5
40°	1656.6
42.5°	1345.0
45°	1011.5
47.5°	705.4
50°	464.8
52.5°	295.2
55°	175.0
57.5°	93.0
60°	49.2
62.5°	27.4
65°	16.4
67.5°	16.4
70°	10.9
72.5°	5.5
75°	5.5
77.5°	5.5
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)