

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203893

Luminaire Tested: **LE\_6B50D010R EC6B30508030 6LBNGPH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203893  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B50D010R EC6B30508030 6LBNGPH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
NARROW DISTRIBUTION WITH GRAPHITE HAZE TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3360.4 lumens  
Efficiency: N/A  
Efficacy: 57.1 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.88  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 58.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203893

CATALOG NUMBER: LE\_6B50D010R EC6B30508030 6LBNGPH1

### Luminous Intensity Polar Plot

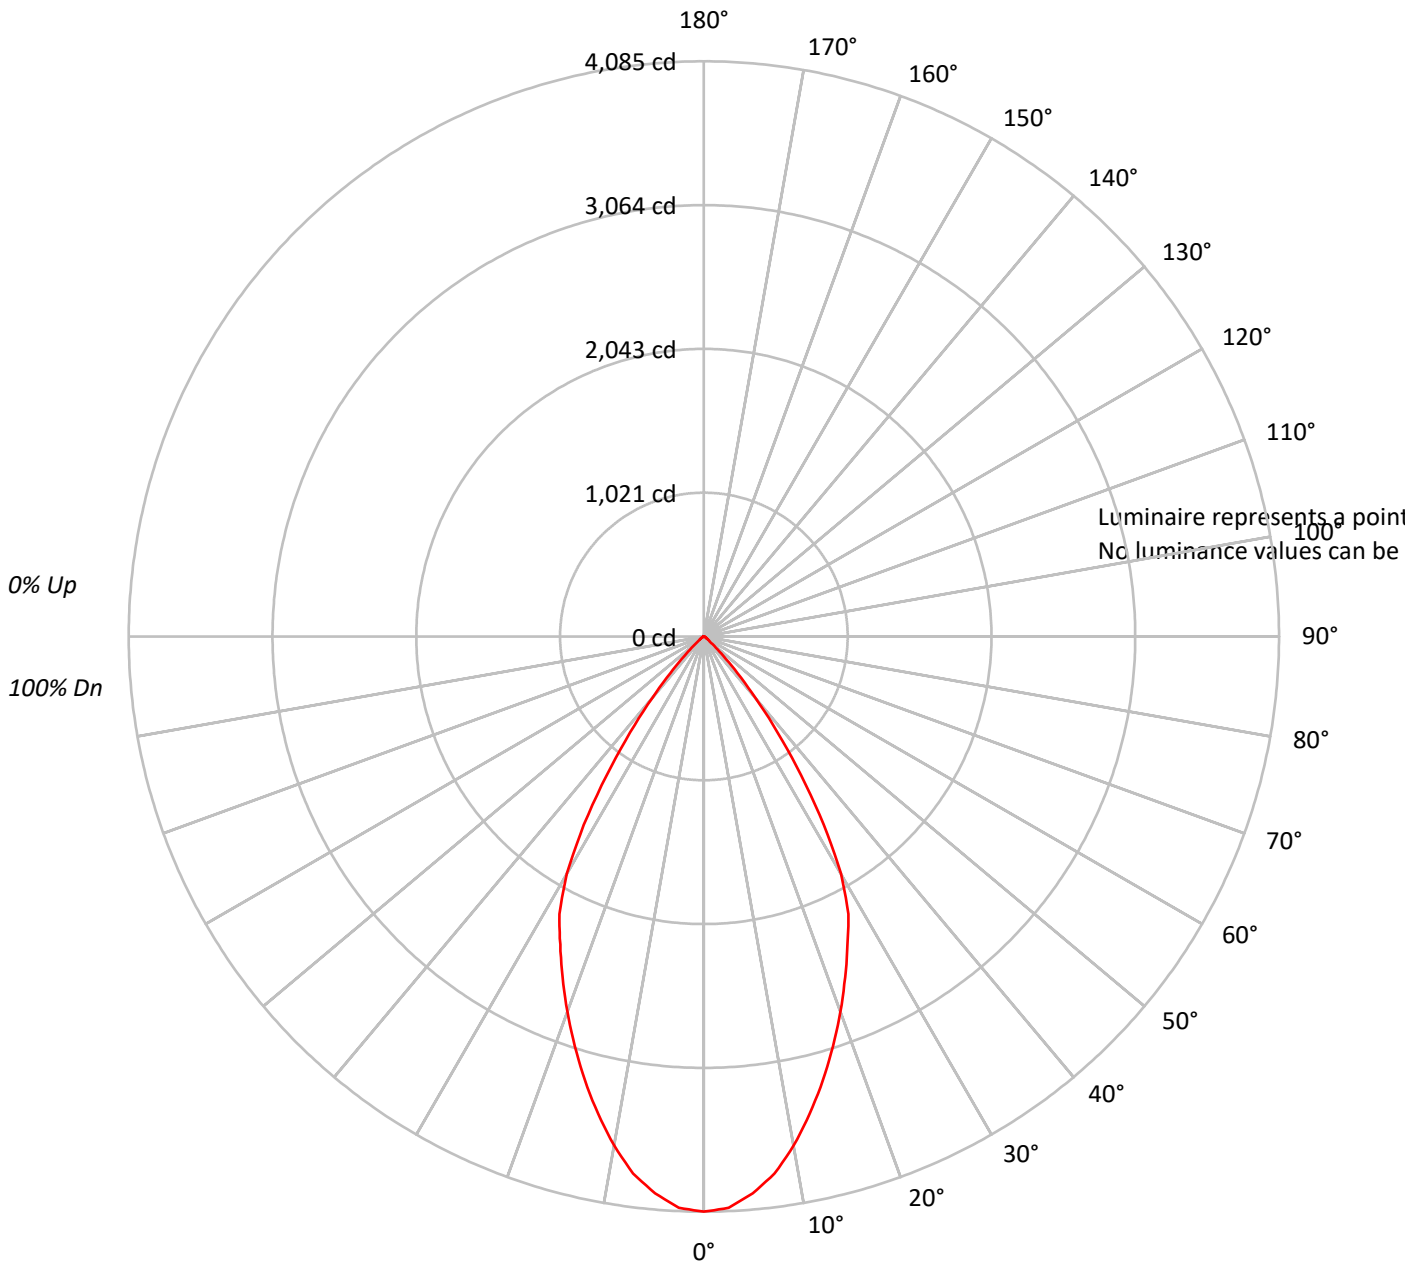



TEST NUMBER: P203893

CATALOG NUMBER: LE\_6B50D010R EC6B30508030 6LBNGPH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																					
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																			
	1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																																			
	2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87																																			
	3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81																																			
	4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																																			
	5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70																																			
	6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66																																			
	7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62																																			
	8	79	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58																																			
	9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54																																			
	10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	55	52	51																																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203893

CATALOG NUMBER: LE\_6B50D010R EC6B30508030 6LBNGPH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	369.8	11.0
10°-20°	912.0	27.1
20°-30°	1104.9	32.9
30°-40°	753.0	22.4
40°-50°	179.3	5.3
50°-60°	28.1	0.8
60°-70°	10.4	0.3
70°-80°	3.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2386.7	71.0
0°-40°	3139.7	93.4
0°-60°	3347.0	99.6
0°-90°	3360.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3360.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4085	
5°	3970	370
15°	3265	912
25°	2414	1105
35°	1203	753
45°	192	179
55°	31	28
65°	8	10
75°	0	3
85°	0	0
90°	0	



TEST NUMBER: P203893

CATALOG NUMBER: LE\_6B50D010R EC6B30508030 6LBNGPH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4084.6
2.5°	4061.6
5°	3969.8
7.5°	3847.1
10°	3670.9
12.5°	3471.6
15°	3264.6
17.5°	3050.1
20°	2835.5
22.5°	2620.9
25°	2414.0
27.5°	2222.4
30°	1946.5
32.5°	1586.4
35°	1203.1
37.5°	858.4
40°	567.1
42.5°	352.5
45°	191.6
47.5°	99.6
50°	53.6
52.5°	38.4
55°	30.6
57.5°	23.0
60°	15.4
62.5°	15.4
65°	7.6
67.5°	7.6
70°	7.6
72.5°	7.6
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)