

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202560

Luminaire Tested: **LE_6B50D010R EC6B30509030 6LBSWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202560
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B50D010R EC6B30509030 6LBSWMH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5996.5 lumens
Efficiency: N/A
Efficacy: 102.0 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202560

CATALOG NUMBER: LE_6B50D010R EC6B30509030 6LBSWMH1

Luminous Intensity Polar Plot

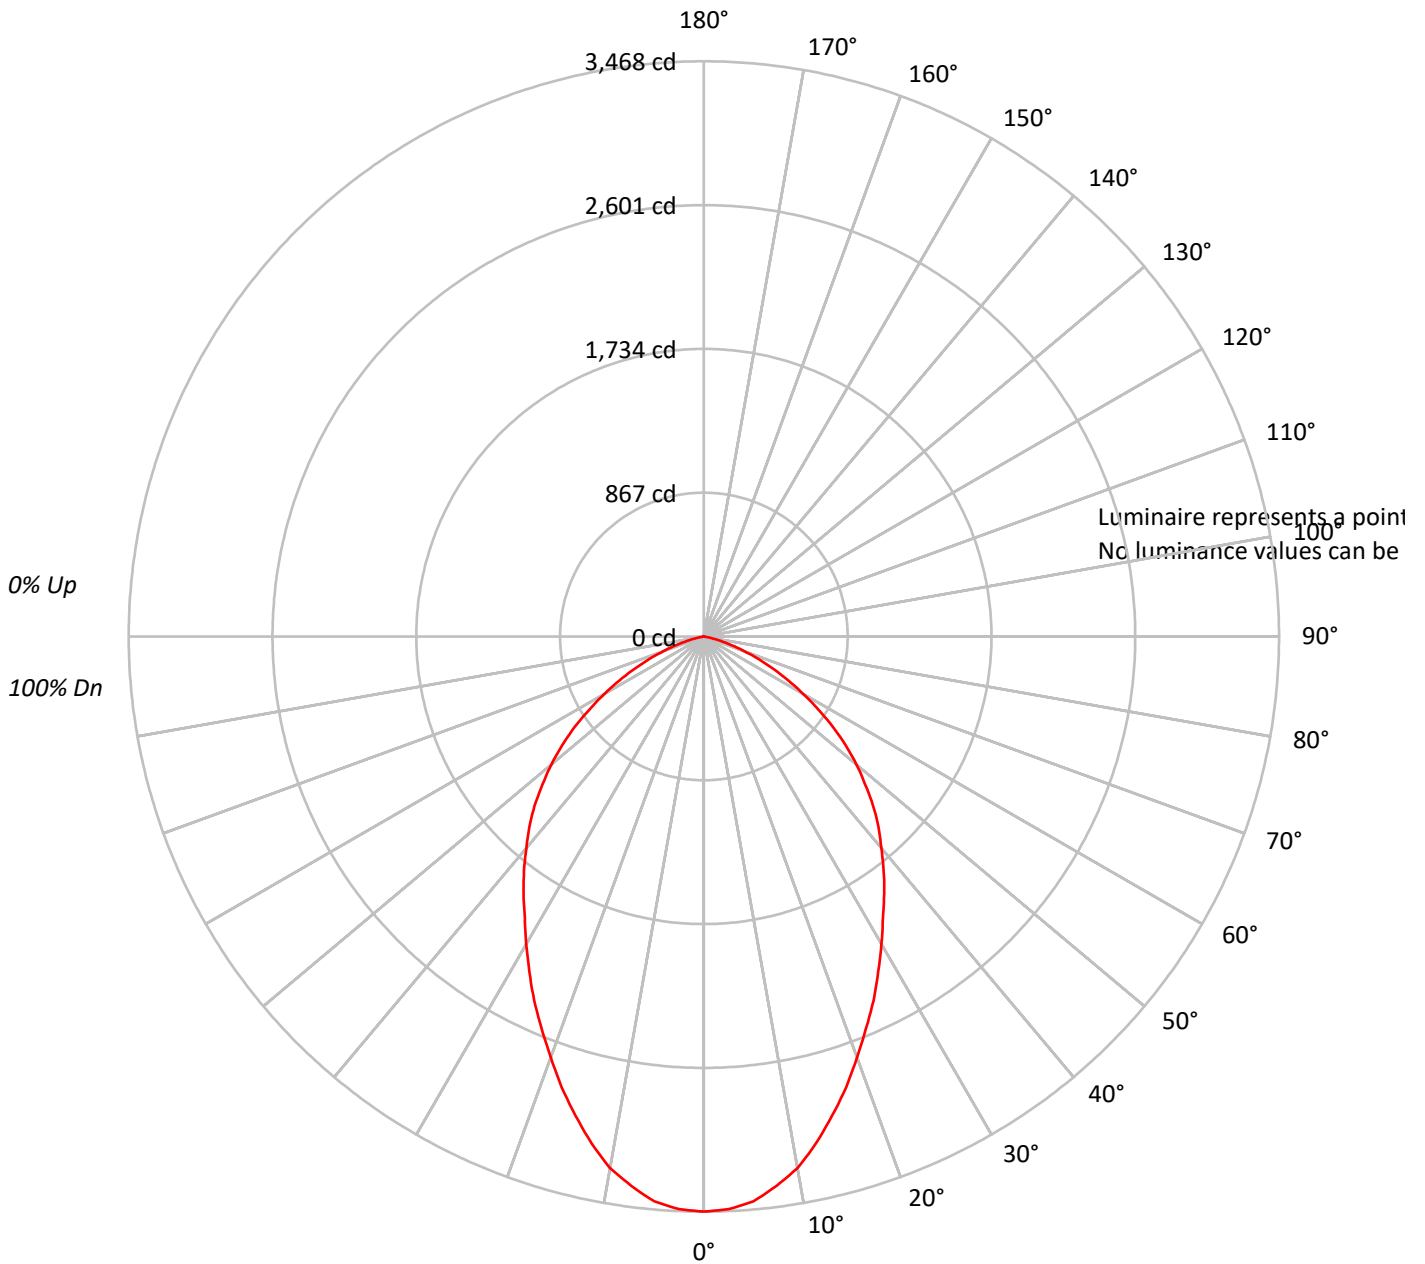



TEST NUMBER: P202560

CATALOG NUMBER: LE_6B50D010R EC6B30509030 6LBSWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88																			
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	81	79	77																			
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67																			
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59																			
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52																			
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	53	48	47																			
7	70	58	50	45	69	57	50	45	56	49	44	55	48	44	53	48	44	42																			
8	66	54	46	40	64	53	45	40	52	45	40	50	44	40	49	44	40	38																			
9	62	49	42	37	61	49	42	37	48	41	37	47	41	36	46	40	36	35																			
10	58	46	39	34	57	45	38	34	45	38	34	44	38	33	43	37	33	32																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202560

CATALOG NUMBER: LE_6B50D010R EC6B30509030 6LBSWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	320.8	5.4
10°-20°	838.6	14.0
20°-30°	1112.0	18.5
30°-40°	1186.1	19.8
40°-50°	1108.8	18.5
50°-60°	845.4	14.1
60°-70°	459.8	7.7
70°-80°	123.4	2.1
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2271.5	37.9
0°-40°	3457.6	57.7
0°-60°	5411.8	90.2
0°-90°	5996.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5996.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3468	
5°	3420	321
15°	2990	839
25°	2421	1112
35°	1895	1186
45°	1444	1109
55°	951	845
65°	459	460
75°	106	123
85°	0	1
90°	0	



TEST NUMBER: P202560

CATALOG NUMBER: LE_6B50D010R EC6B30509030 6LBSWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3467.5
2.5°	3456.5
5°	3419.8
7.5°	3342.6
10°	3254.5
12.5°	3129.6
15°	2990.0
17.5°	2850.5
20°	2699.9
22.5°	2556.6
25°	2420.6
27.5°	2277.4
30°	2141.5
32.5°	2009.2
35°	1895.4
37.5°	1781.5
40°	1664.0
42.5°	1557.5
45°	1443.6
47.5°	1318.8
50°	1201.1
52.5°	1076.2
55°	951.4
57.5°	815.5
60°	690.6
62.5°	573.0
65°	459.1
67.5°	356.2
70°	260.8
72.5°	180.0
75°	106.5
77.5°	47.8
80°	11.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)