

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203380

Luminaire Tested: **LE_6B50D010R EC6B30508040 6LBMWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203380
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B50D010R EC6B30508040 6LBMWH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WHEAT TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5463.1 lumens
Efficiency: N/A
Efficacy: 92.9 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.85
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203380

CATALOG NUMBER: LE_6B50D010R EC6B30508040 6LBMWH1

Luminous Intensity Polar Plot

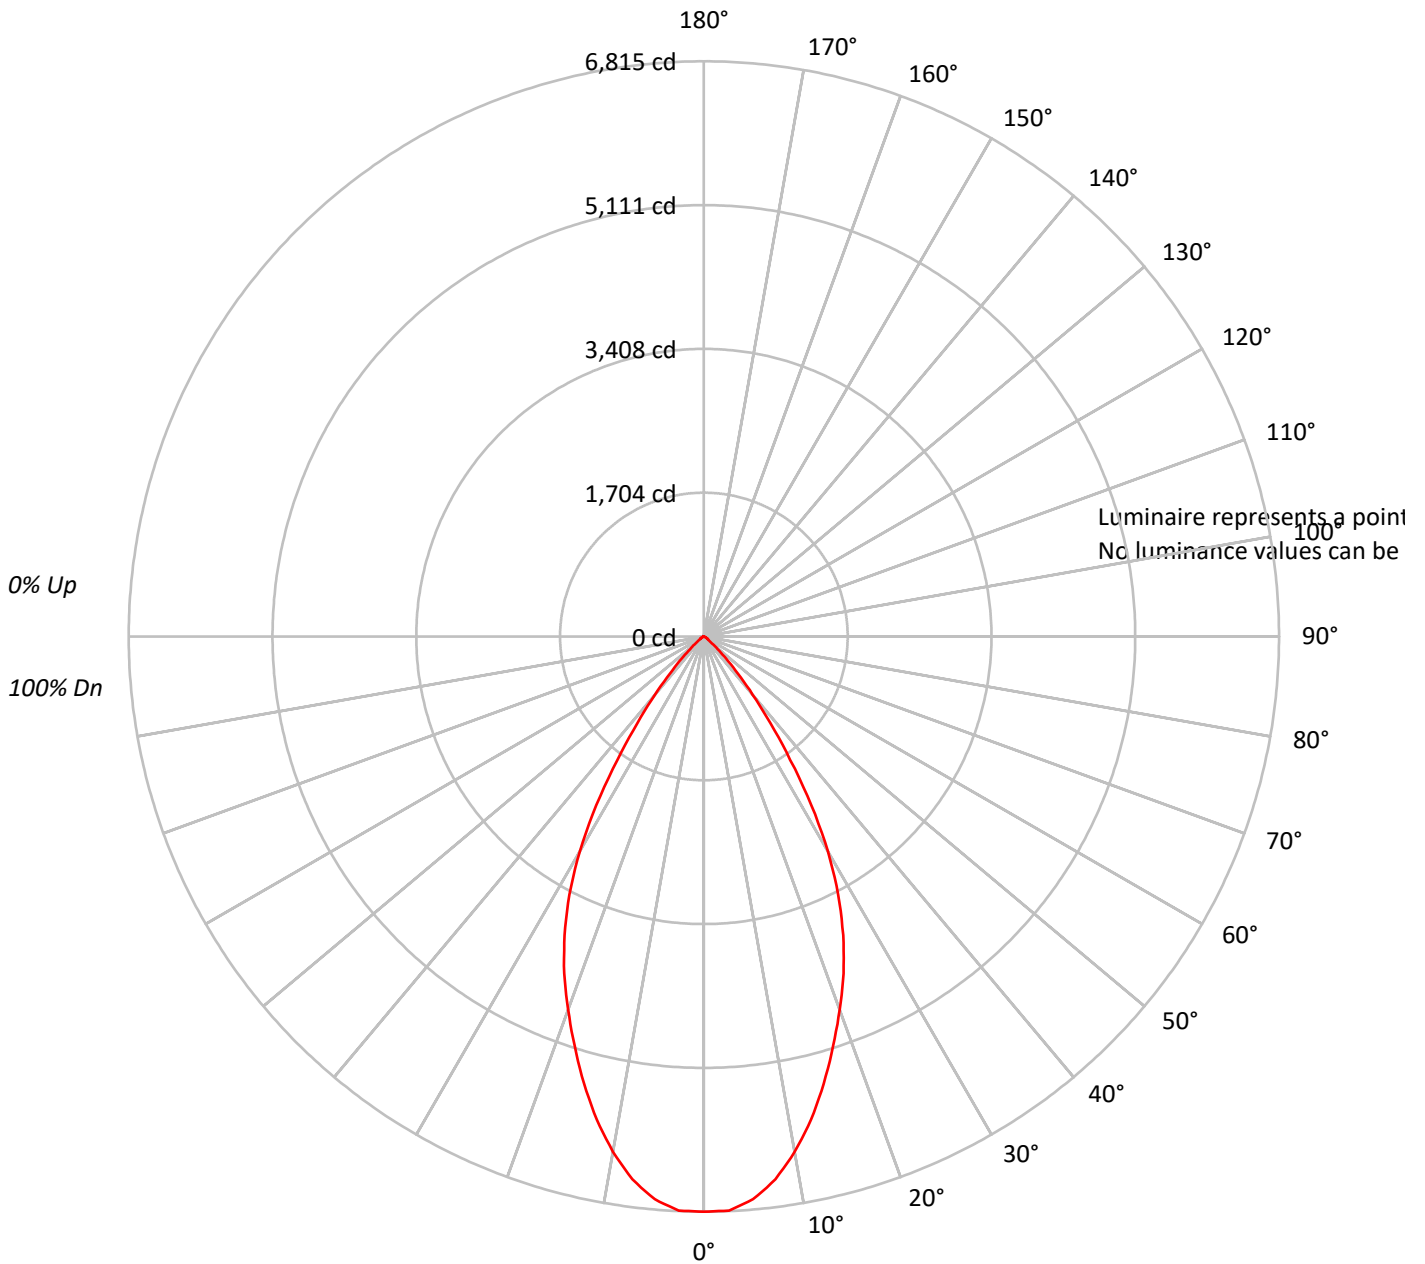



TEST NUMBER: P203380

CATALOG NUMBER: LE_6B50D010R EC6B30508040 6LBMWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94		
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	91	89	87		
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81		
4	97	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76		
5	93	84	79	74	91	83	78	74	82	77	73	80	76	73	78	75	72	71		
6	88	79	73	69	87	78	73	69	77	72	68	76	71	68	74	70	67	66		
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62		
8	80	70	64	60	78	70	64	60	69	64	60	68	63	60	67	62	59	58		
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55		
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52		

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203380

CATALOG NUMBER: LE_6B50D010R EC6B30508040 6LBMWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	623.0	11.4
10°-20°	1529.6	28.0
20°-30°	1769.8	32.4
30°-40°	1131.2	20.7
40°-50°	320.7	5.9
50°-60°	57.2	1.0
60°-70°	23.4	0.4
70°-80°	8.0	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3922.5	71.8
0°-40°	5053.7	92.5
0°-60°	5431.7	99.4
0°-90°	5463.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5463.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6815	
5°	6694	623
15°	5486	1530
25°	3905	1770
35°	1786	1131
45°	372	321
55°	53	57
65°	23	23
75°	8	8
85°	0	0
90°	0	



TEST NUMBER: P203380

CATALOG NUMBER: LE_6B50D010R EC6B30508040 6LBMWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	6815.4
2.5°	6807.8
5°	6693.8
7.5°	6488.6
10°	6199.9
12.5°	5865.6
15°	5485.8
17.5°	5090.6
20°	4703.1
22.5°	4323.2
25°	3905.4
27.5°	3449.5
30°	2940.4
32.5°	2370.5
35°	1785.5
37.5°	1291.6
40°	896.5
42.5°	592.6
45°	372.2
47.5°	220.4
50°	129.1
52.5°	76.0
55°	53.1
57.5°	45.6
60°	38.0
62.5°	30.4
65°	22.8
67.5°	15.2
70°	15.2
72.5°	7.6
75°	7.6
77.5°	7.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)