

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204928

Luminaire Tested: **LE_6B50D010R EC6B30508050 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204928
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B50D010R EC6B30508050 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6419.1 lumens
Efficiency: N/A
Efficacy: 109.2 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204928

CATALOG NUMBER: LE_6B50D010R EC6B30508050 6LBCSMB1

Luminous Intensity Polar Plot

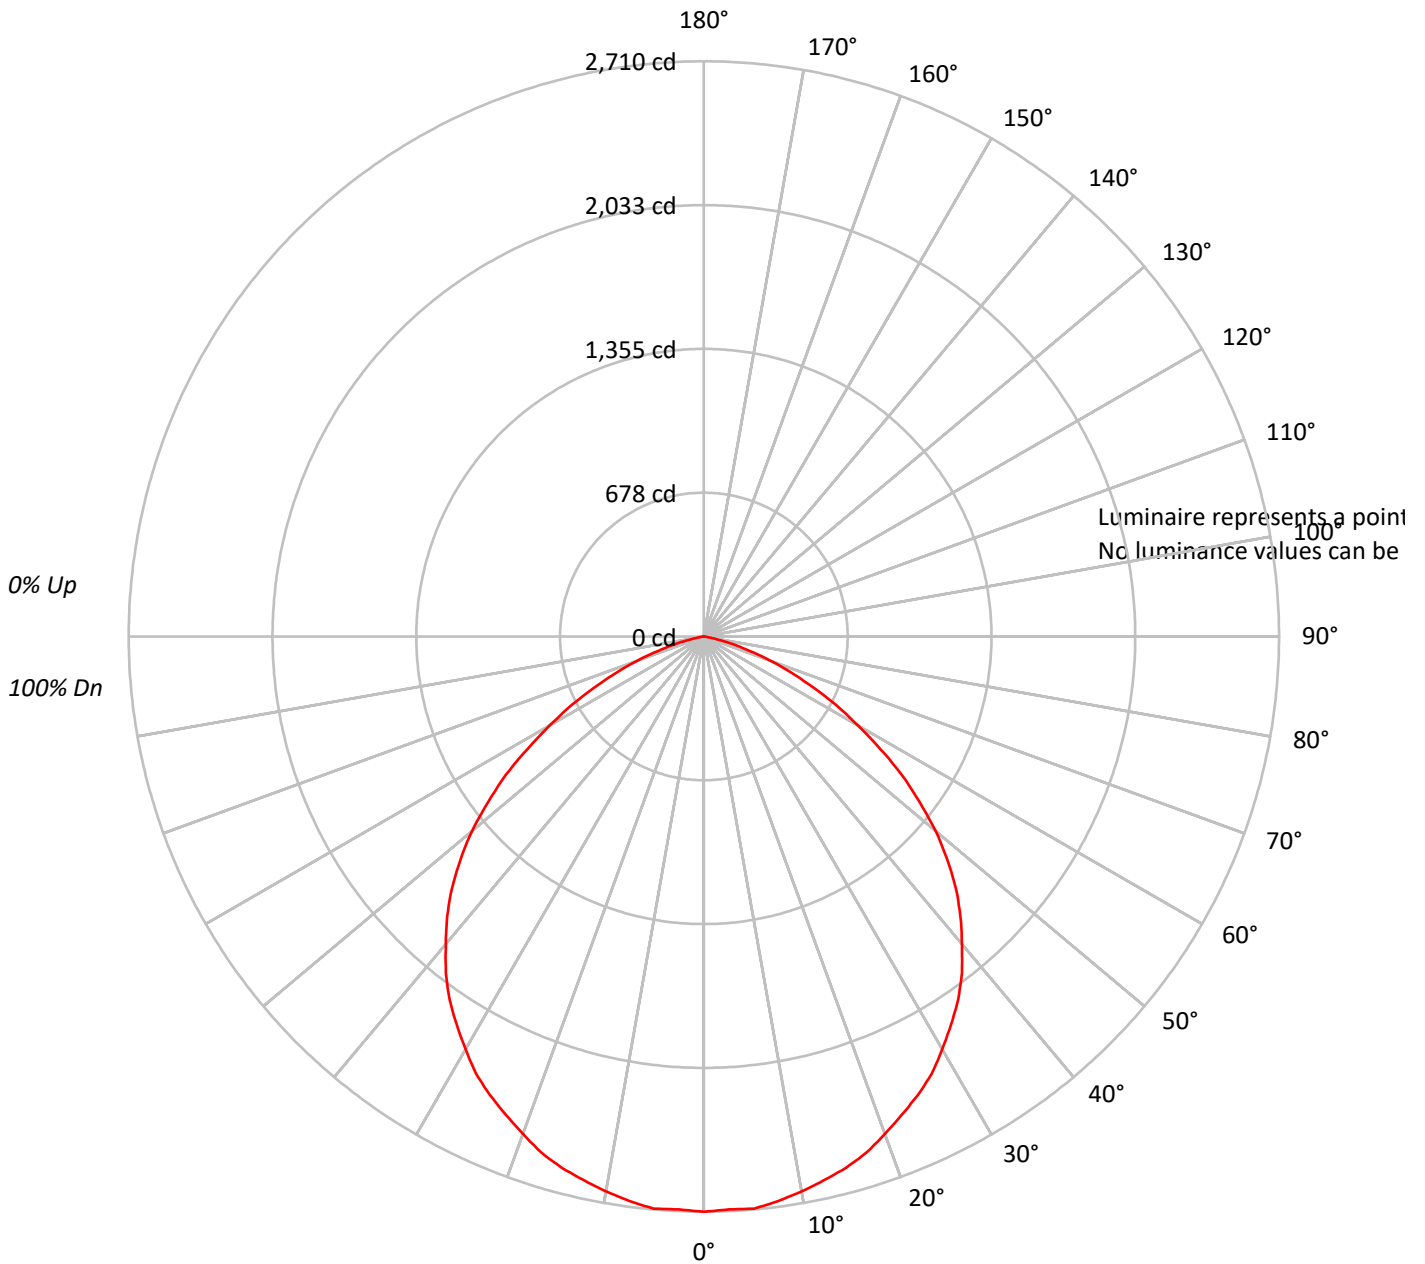



TEST NUMBER: P204928

CATALOG NUMBER: LE_6B50D010R EC6B30508050 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88																			
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75																			
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65																			
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56																			
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49																			
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43																			
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39																			
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35																			
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31																			
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204928

CATALOG NUMBER: LE_6B50D010R EC6B30508050 6LBSCMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	256.4	4.0
10°-20°	730.4	11.4
20°-30°	1098.0	17.1
30°-40°	1302.8	20.3
40°-50°	1289.3	20.1
50°-60°	1012.7	15.8
60°-70°	567.8	8.8
70°-80°	159.4	2.5
80°-90°	2.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2084.7	32.5
0°-40°	3387.5	52.8
0°-60°	5689.4	88.6
0°-90°	6419.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6419.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2710	
5°	2706	256
15°	2591	730
25°	2384	1098
35°	2089	1303
45°	1680	1289
55°	1141	1013
65°	566	568
75°	138	159
85°	0	2
90°	0	



TEST NUMBER: P204928

CATALOG NUMBER: LE_6B50D010R EC6B30508050 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2710.5
2.5°	2701.4
5°	2705.9
7.5°	2682.9
10°	2655.2
12.5°	2623.1
15°	2590.9
17.5°	2549.5
20°	2494.2
22.5°	2439.0
25°	2383.8
27.5°	2324.0
30°	2245.8
32.5°	2167.5
35°	2089.2
37.5°	1997.2
40°	1891.4
42.5°	1790.1
45°	1679.8
47.5°	1555.5
50°	1426.6
52.5°	1279.4
55°	1141.2
57.5°	984.8
60°	837.5
62.5°	704.1
65°	566.0
67.5°	446.4
70°	331.4
72.5°	225.5
75°	138.0
77.5°	69.0
80°	18.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)