

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204314

Luminaire Tested: **LE_6B50D010R EC6B30509050 6LBSWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204314
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B50D010R EC6B30509050 6LBSWH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH WHEAT TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6097.4 lumens
Efficiency: N/A
Efficacy: 103.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 58.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204314

CATALOG NUMBER: LE_6B50D010R EC6B30509050 6LBSWH1

Luminous Intensity Polar Plot

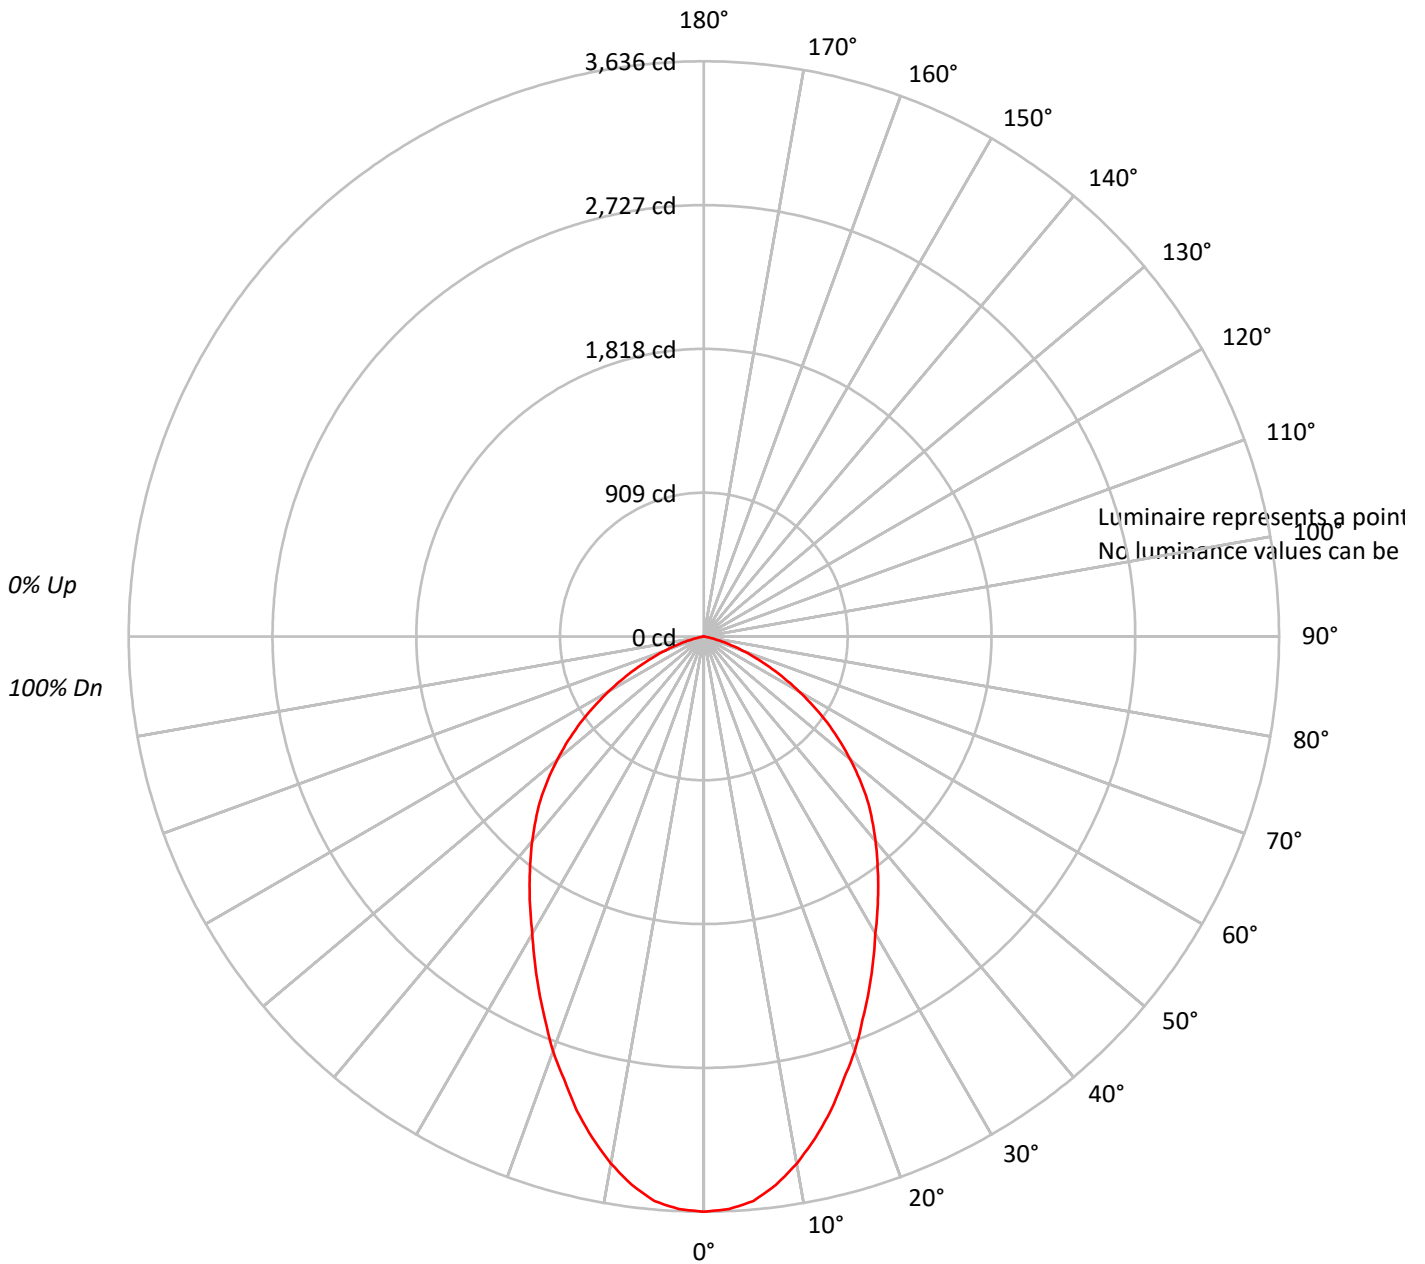



TEST NUMBER: P204314

CATALOG NUMBER: LE_6B50D010R EC6B30509050 6LBSWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89				89
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77				77
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67				67
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59				59
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52				52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47				47
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42				42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38				38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35				35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32				32

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204314

CATALOG NUMBER: LE_6B50D010R EC6B30509050 6LBSWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	335.4	5.5
10°-20°	868.1	14.2
20°-30°	1135.5	18.6
30°-40°	1202.3	19.7
40°-50°	1121.4	18.4
50°-60°	849.4	13.9
60°-70°	460.0	7.5
70°-80°	123.4	2.0
80°-90°	1.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2339.0	38.4
0°-40°	3541.4	58.1
0°-60°	5512.1	90.4
0°-90°	6097.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6097.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3636	
5°	3583	335
15°	3103	868
25°	2469	1136
35°	1922	1202
45°	1461	1121
55°	954	849
65°	460	460
75°	107	123
85°	0	2
90°	0	



TEST NUMBER: P204314

CATALOG NUMBER: LE_6B50D010R EC6B30509050 6LBSWH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3636.5
2.5°	3623.1
5°	3583.1
7.5°	3496.4
10°	3382.9
12.5°	3249.5
15°	3102.6
17.5°	2935.9
20°	2789.0
22.5°	2622.2
25°	2468.8
27.5°	2315.4
30°	2168.5
32.5°	2041.8
35°	1921.6
37.5°	1801.5
40°	1688.1
42.5°	1574.6
45°	1461.2
47.5°	1334.5
50°	1207.8
52.5°	1080.9
55°	954.1
57.5°	820.8
60°	693.9
62.5°	573.9
65°	460.4
67.5°	353.6
70°	260.2
72.5°	180.1
75°	106.8
77.5°	46.8
80°	13.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)