

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203601

Luminaire Tested: **LE_6B60D010R EC6B60709024 6LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203601
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709024 6LBMMW1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4326.2 lumens
Efficiency: N/A
Efficacy: 69.2 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203601

CATALOG NUMBER: LE_6B60D010R EC6B60709024 6LBMMW1

Luminous Intensity Polar Plot

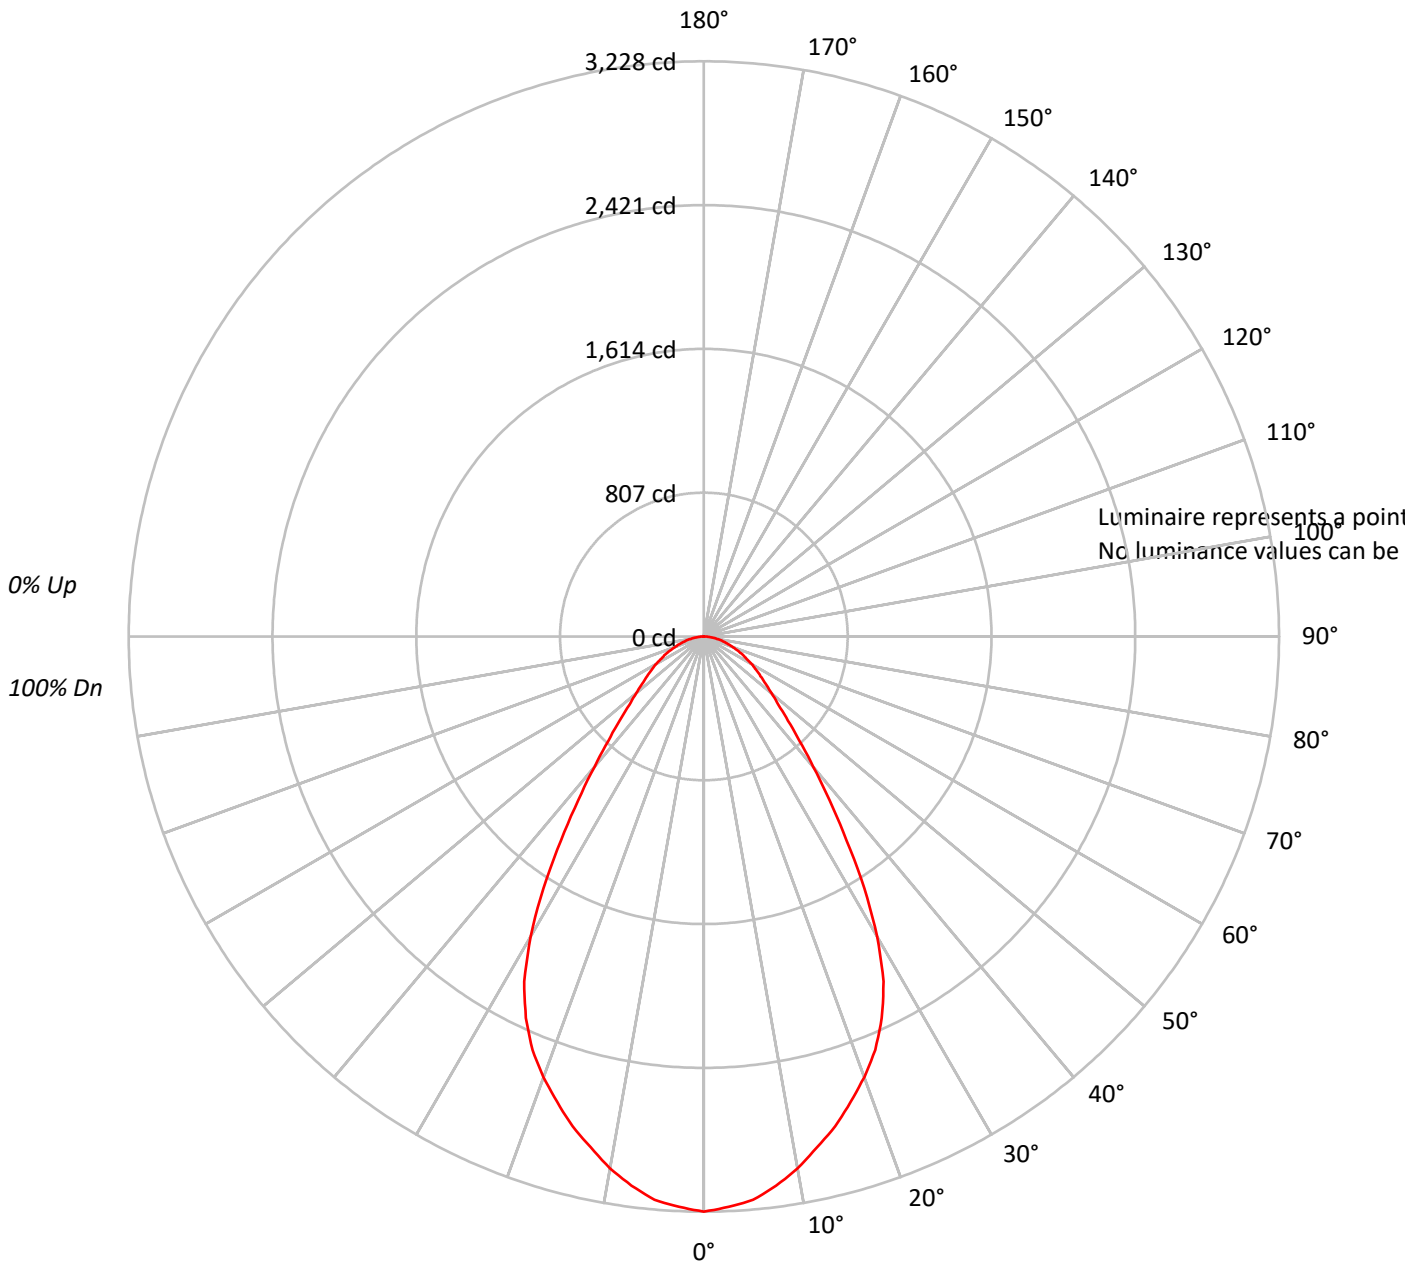



TEST NUMBER: P203601

CATALOG NUMBER: LE_6B60D010R EC6B60709024 6LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	92	91	89																			
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79																			
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71																			
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64																			
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58																			
6	79	68	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53																			
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48																			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44																			
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41																			
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203601

CATALOG NUMBER: LE_6B60D010R EC6B60709024 6LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	298.2	6.9
10°-20°	798.7	18.5
20°-30°	1072.5	24.8
30°-40°	879.7	20.3
40°-50°	528.3	12.2
50°-60°	351.1	8.1
60°-70°	235.3	5.4
70°-80°	126.7	2.9
80°-90°	35.7	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2169.4	50.1
0°-40°	3049.1	70.5
0°-60°	3928.5	90.8
0°-90°	4326.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4326.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3228	
5°	3174	298
15°	2846	799
25°	2363	1072
35°	1396	880
45°	668	528
55°	388	351
65°	239	235
75°	119	127
85°	30	36
90°	0	



TEST NUMBER: P203601

CATALOG NUMBER: LE_6B60D010R EC6B60709024 6LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3228.0
2.5°	3204.1
5°	3174.2
7.5°	3108.6
10°	3031.1
12.5°	2935.6
15°	2846.1
17.5°	2738.8
20°	2631.4
22.5°	2512.0
25°	2362.9
27.5°	2183.9
30°	1945.1
32.5°	1676.6
35°	1396.2
37.5°	1157.5
40°	954.6
42.5°	793.6
45°	668.2
47.5°	566.9
50°	495.2
52.5°	435.6
55°	387.9
57.5°	346.1
60°	310.2
62.5°	268.5
65°	238.6
67.5°	202.9
70°	173.0
72.5°	143.2
75°	119.4
77.5°	95.5
80°	71.6
82.5°	53.8
85°	29.9
87.5°	11.9
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)