

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203081

Luminaire Tested: **LE_6B60D010R EC6B60708027 6LBWB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203081
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60708027 6LBWB1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR BLACK TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4017.0 lumens
Efficiency: N/A
Efficacy: 64.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.08 / 1.08
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203081

CATALOG NUMBER: LE_6B60D010R EC6B60708027 6LBWB1

Luminous Intensity Polar Plot

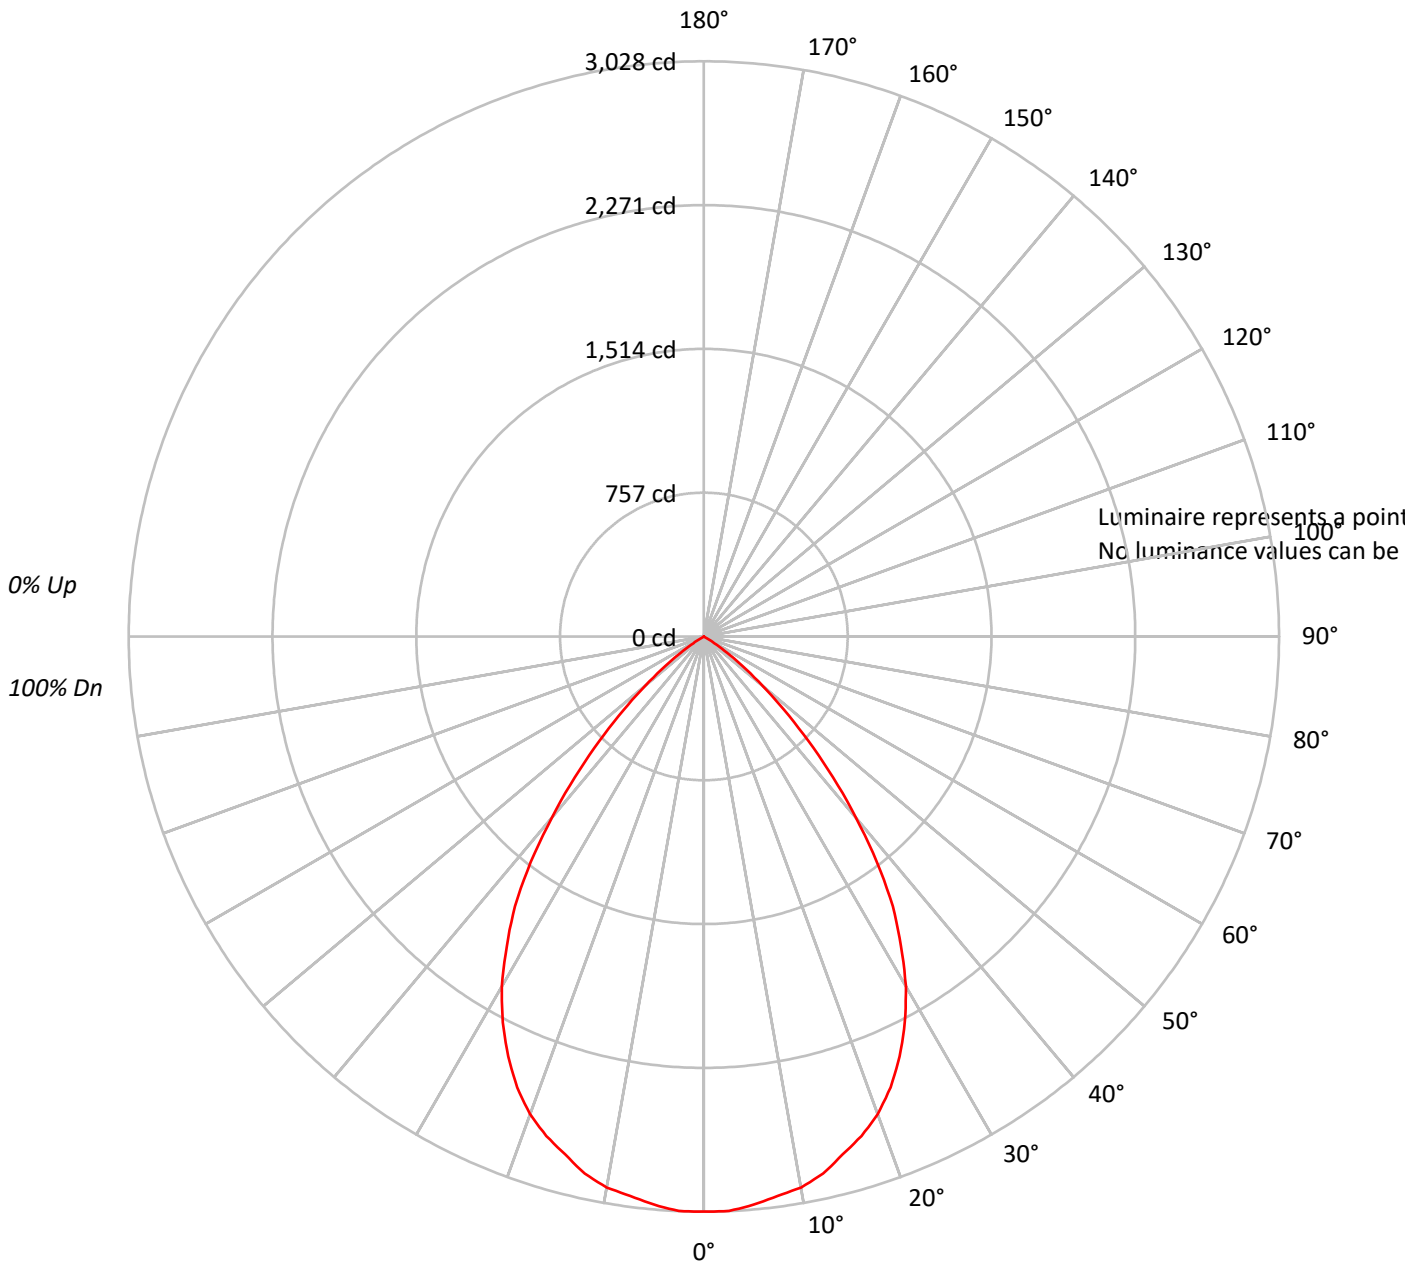



TEST NUMBER: P203081

CATALOG NUMBER: LE_6B60D010R EC6B60708027 6LBWB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92																																				
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84																																				
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77																																				
4	94	86	79	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																																				
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64																																				
6	83	73	67	62	82	72	66	61	71	65	61	69	64	61	68	64	60	59																																				
7	78	68	61	56	77	67	61	56	66	60	56	65	60	56	63	59	55	54																																				
8	74	63	57	52	73	63	56	52	61	56	52	60	55	51	59	55	51	50																																				
9	70	59	52	48	69	58	52	48	57	52	48	57	51	47	56	51	47	46																																				
10	66	55	49	44	65	55	49	44	54	48	44	53	48	44	52	47	44	42																																				

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203081

CATALOG NUMBER: LE_6B60D010R EC6B60708027 6LBWB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	284.6	7.1
10°-20°	796.0	19.8
20°-30°	1115.0	27.8
30°-40°	1064.8	26.5
40°-50°	606.5	15.1
50°-60°	148.1	3.7
60°-70°	2.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2195.6	54.7
0°-40°	3260.5	81.2
0°-60°	4015.0	100.0
0°-90°	4017.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4017.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3028	
5°	3003	285
15°	2823	796
25°	2438	1115
35°	1735	1065
45°	777	606
55°	147	148
65°	0	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P203081

CATALOG NUMBER: LE_6B60D010R EC6B60708027 6LBWB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3027.5
2.5°	3027.5
5°	3002.9
7.5°	2970.2
10°	2945.6
12.5°	2896.6
15°	2822.9
17.5°	2757.5
20°	2675.6
22.5°	2569.2
25°	2438.4
27.5°	2291.1
30°	2127.4
32.5°	1931.0
35°	1734.6
37.5°	1497.4
40°	1243.8
42.5°	1006.4
45°	777.4
47.5°	572.8
50°	400.9
52.5°	253.6
55°	147.2
57.5°	65.5
60°	16.4
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)