

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205045

Luminaire Tested: **LE_6B60D010R EC6B60709027 6LBCS1MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205045
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709027 6LBCS1MMS
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE METALLIC SILVER TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6306.3 lumens
Efficiency: N/A
Efficacy: 100.9 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.27
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205045

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBSC1MMS

Luminous Intensity Polar Plot

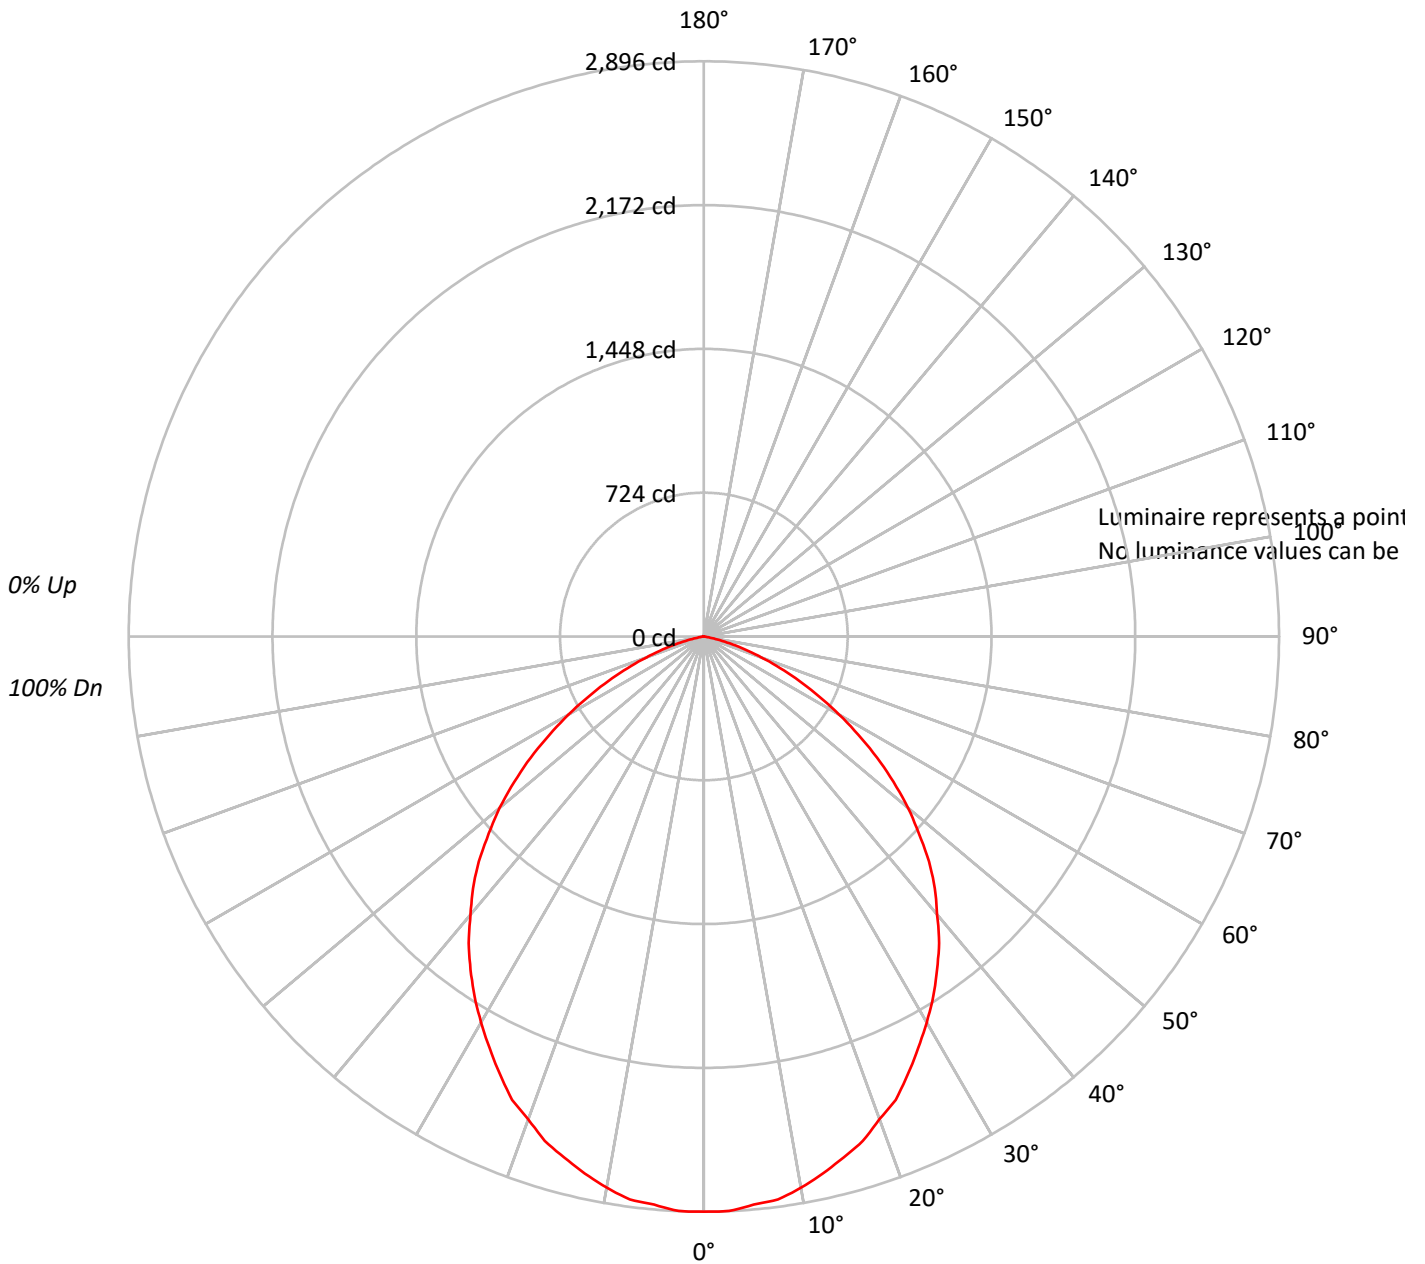



TEST NUMBER: P205045

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBSC1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	103	100	108	105	101	98	100	98	95	97	94	92	93	91	90	88																			
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76																			
3	94	85	77	72	92	83	76	71	80	74	70	77	73	69	75	71	67	65																			
4	87	76	68	62	84	74	67	61	72	66	61	70	64	60	68	63	59	57																			
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50																			
6	74	62	54	48	72	61	53	47	59	52	47	58	51	47	56	51	46	44																			
7	69	56	48	42	67	56	48	42	54	47	42	53	46	42	51	46	41	40																			
8	64	52	44	38	63	51	43	38	50	43	38	48	42	38	47	42	37	36																			
9	60	48	40	35	59	47	40	34	46	39	34	45	39	34	44	38	34	32																			
10	57	44	36	31	55	43	36	31	43	36	31	42	35	31	41	35	31	29																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205045

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBCS1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	272.9	4.3
10°-20°	765.8	12.1
20°-30°	1118.5	17.7
30°-40°	1279.3	20.3
40°-50°	1229.5	19.5
50°-60°	949.4	15.1
60°-70°	529.9	8.4
70°-80°	154.2	2.4
80°-90°	6.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2157.3	34.2
0°-40°	3436.6	54.5
0°-60°	5615.6	89.0
0°-90°	6306.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6306.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2896	
5°	2872	273
15°	2717	766
25°	2431	1119
35°	2048	1279
45°	1603	1230
55°	1065	949
65°	530	530
75°	135	154
85°	4	7
90°	0	



TEST NUMBER: P205045

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBCS1MMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	2896.0
2.5°	2896.0
5°	2871.6
7.5°	2859.4
10°	2818.5
12.5°	2769.6
15°	2716.6
17.5°	2663.5
20°	2586.0
22.5°	2524.9
25°	2431.0
27.5°	2337.2
30°	2243.4
32.5°	2149.6
35°	2047.6
37.5°	1945.6
40°	1827.4
42.5°	1721.4
45°	1603.0
47.5°	1468.4
50°	1342.0
52.5°	1203.2
55°	1064.6
57.5°	921.9
60°	787.2
62.5°	652.6
65°	530.2
67.5°	416.0
70°	310.0
72.5°	216.1
75°	134.6
77.5°	69.4
80°	24.5
82.5°	8.1
85°	4.1
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)