

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203293

Luminaire Tested: **LE_6B60D010R EC6B60709027 6LBMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203293
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709027 6LBMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4482.0 lumens
Efficiency: N/A
Efficacy: 71.7 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203293

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBMH1

Luminous Intensity Polar Plot

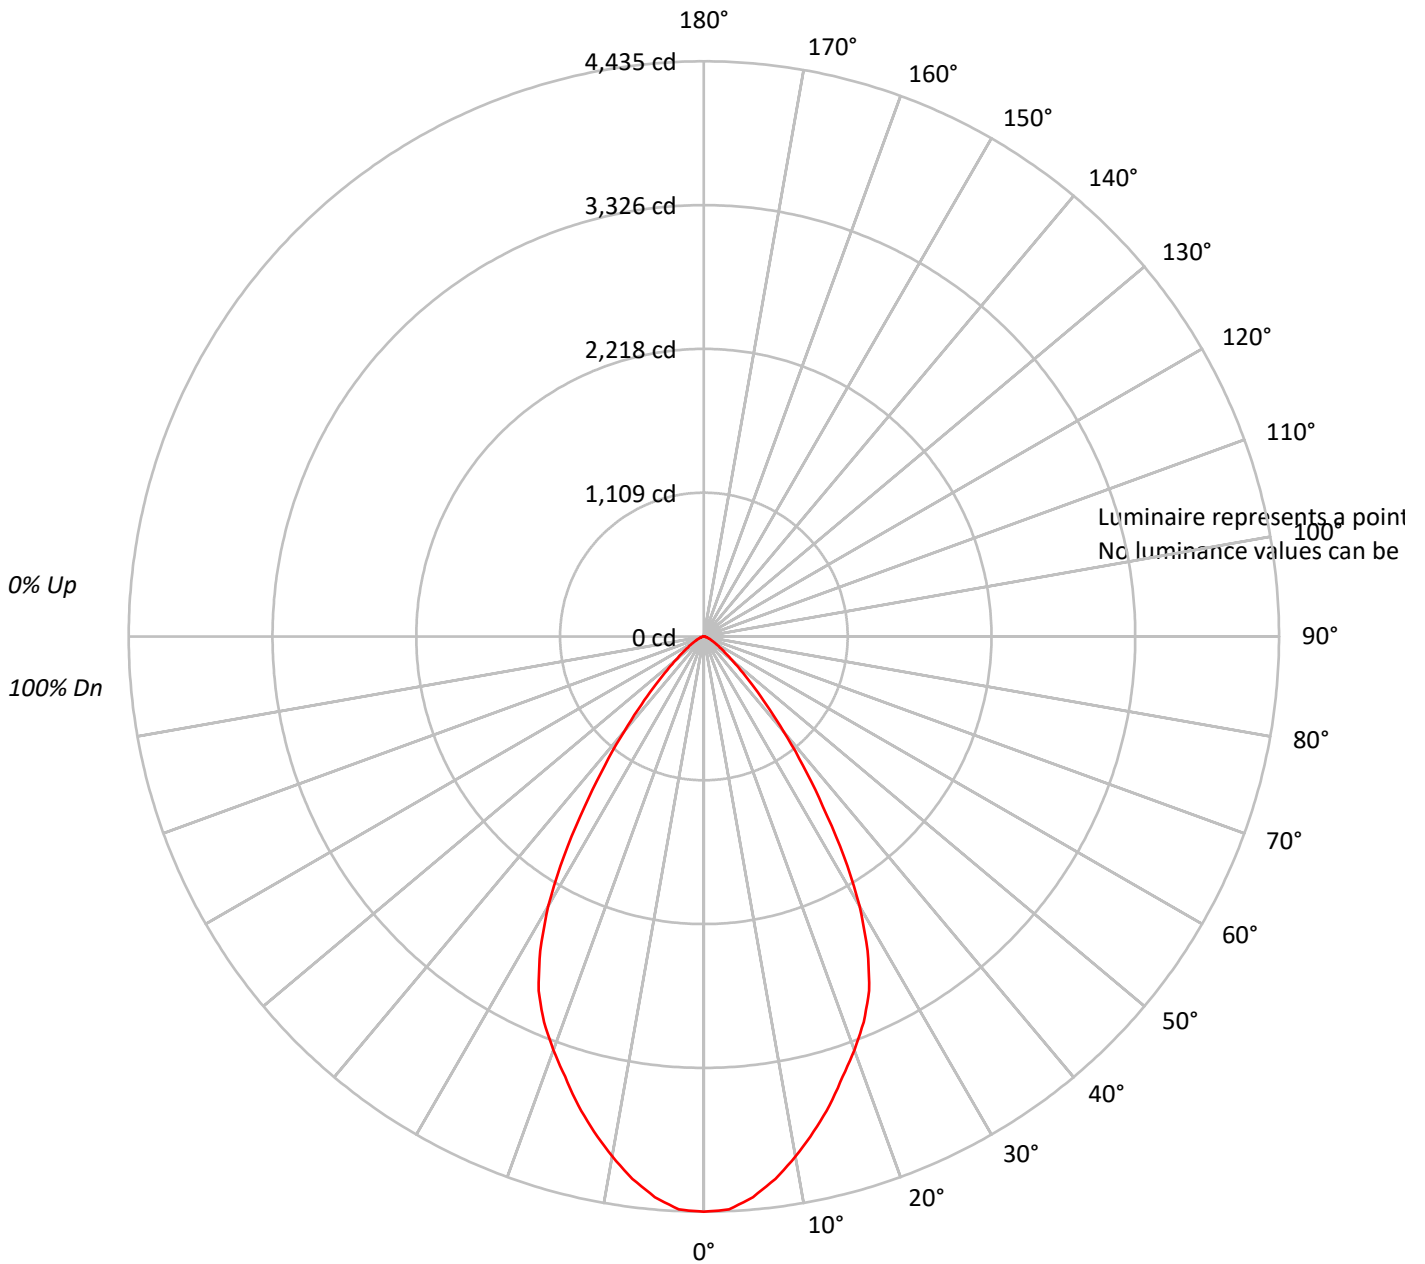



TEST NUMBER: P203293

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20																	
RC	80									70									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																								
RCR																																																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																																				
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																																				
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85																																				
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78																																				
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72																																				
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66																																				
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61																																				
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																																				
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53																																				
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49																																				
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46																																				

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203293

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	405.6	9.0
10°-20°	1049.1	23.4
20°-30°	1359.4	30.3
30°-40°	1009.3	22.5
40°-50°	426.1	9.5
50°-60°	151.3	3.4
60°-70°	58.4	1.3
70°-80°	20.2	0.5
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2814.1	62.8
0°-40°	3823.4	85.3
0°-60°	4400.7	98.2
0°-90°	4482.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4482.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4435	
5°	4339	406
15°	3744	1049
25°	3014	1359
35°	1600	1009
45°	525	426
55°	160	151
65°	58	58
75°	19	20
85°	0	3
90°	0	



TEST NUMBER: P203293

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4435.4
2.5°	4422.6
5°	4339.4
7.5°	4217.9
10°	4070.6
12.5°	3910.6
15°	3744.2
17.5°	3558.6
20°	3392.1
22.5°	3219.4
25°	3014.5
27.5°	2733.0
30°	2400.1
32.5°	2009.8
35°	1600.1
37.5°	1254.5
40°	953.6
42.5°	710.4
45°	524.9
47.5°	384.0
50°	281.6
52.5°	211.2
55°	160.0
57.5°	121.6
60°	96.0
62.5°	70.4
65°	57.6
67.5°	44.8
70°	32.0
72.5°	25.6
75°	19.2
77.5°	12.8
80°	6.4
82.5°	6.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)