

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204737

Luminaire Tested: **LE_6B60D010R EC6B60709027 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204737
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709027 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6659.6 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204737

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBPSMW1

Luminous Intensity Polar Plot

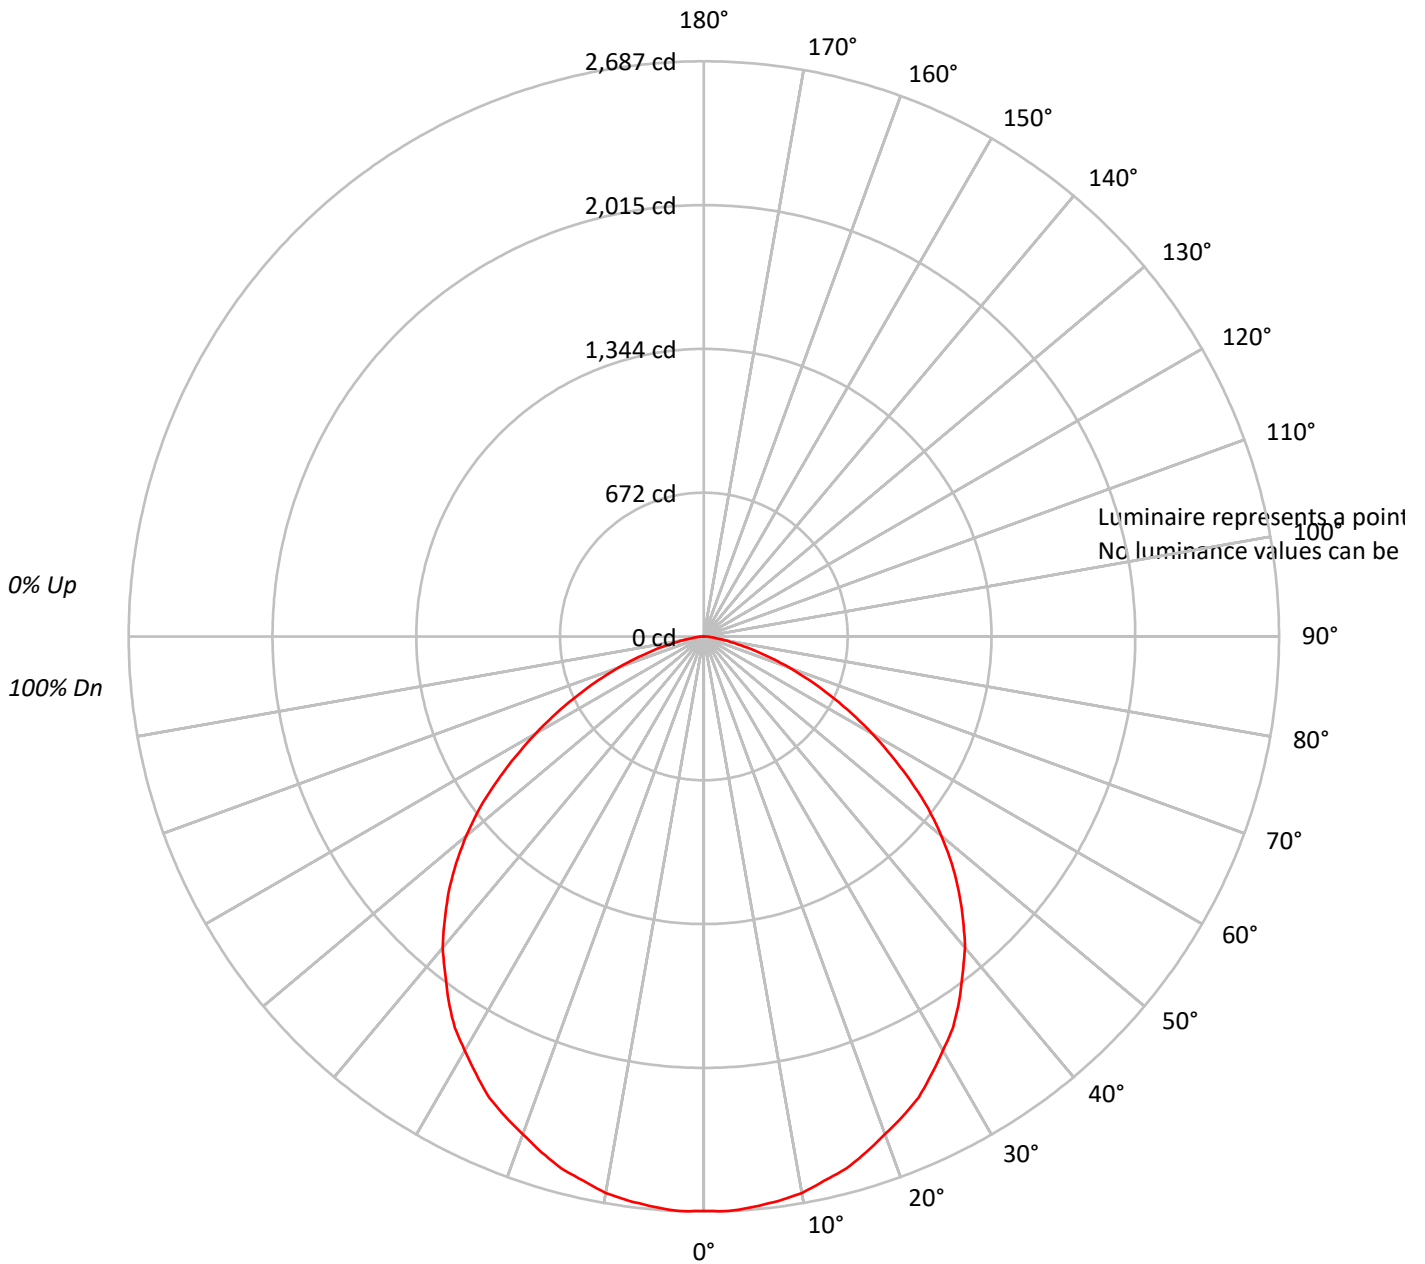



TEST NUMBER: P204737

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204737

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	254.2	3.8
10°-20°	724.7	10.9
20°-30°	1091.4	16.4
30°-40°	1298.7	19.5
40°-50°	1296.3	19.5
50°-60°	1054.2	15.8
60°-70°	648.5	9.7
70°-80°	251.3	3.8
80°-90°	40.3	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2070.3	31.1
0°-40°	3369.0	50.6
0°-60°	5719.6	85.9
0°-90°	6659.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6659.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2683	
5°	2675	254
15°	2573	725
25°	2375	1091
35°	2080	1299
45°	1685	1296
55°	1180	1054
65°	651	649
75°	229	251
85°	32	40
90°	0	



TEST NUMBER: P204737

CATALOG NUMBER: LE_6B60D010R EC6B60709027 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2683.1
2.5°	2687.1
5°	2675.2
7.5°	2659.5
10°	2639.8
12.5°	2604.2
15°	2572.6
17.5°	2525.4
20°	2474.0
22.5°	2426.6
25°	2375.4
27.5°	2304.4
30°	2233.4
32.5°	2166.2
35°	2079.5
37.5°	1984.8
40°	1898.0
42.5°	1791.4
45°	1684.9
47.5°	1570.5
50°	1448.1
52.5°	1321.9
55°	1179.8
57.5°	1041.8
60°	907.5
62.5°	777.4
65°	651.0
67.5°	532.6
70°	422.2
72.5°	319.6
75°	228.9
77.5°	150.0
80°	90.8
82.5°	55.2
85°	31.6
87.5°	15.8
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)