

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203298

Luminaire Tested: **LE\_6B60D010R EC6B60709727 6LBMH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P203298  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B60D010R EC6B60709727 6LBMH1  
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT  
MEDIUM DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3897.5 lumens  
Efficiency: N/A  
Efficacy: 62.4 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.93  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 62.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P203298

CATALOG NUMBER: LE\_6B60D010R EC6B60709727 6LBMH1

### Luminous Intensity Polar Plot

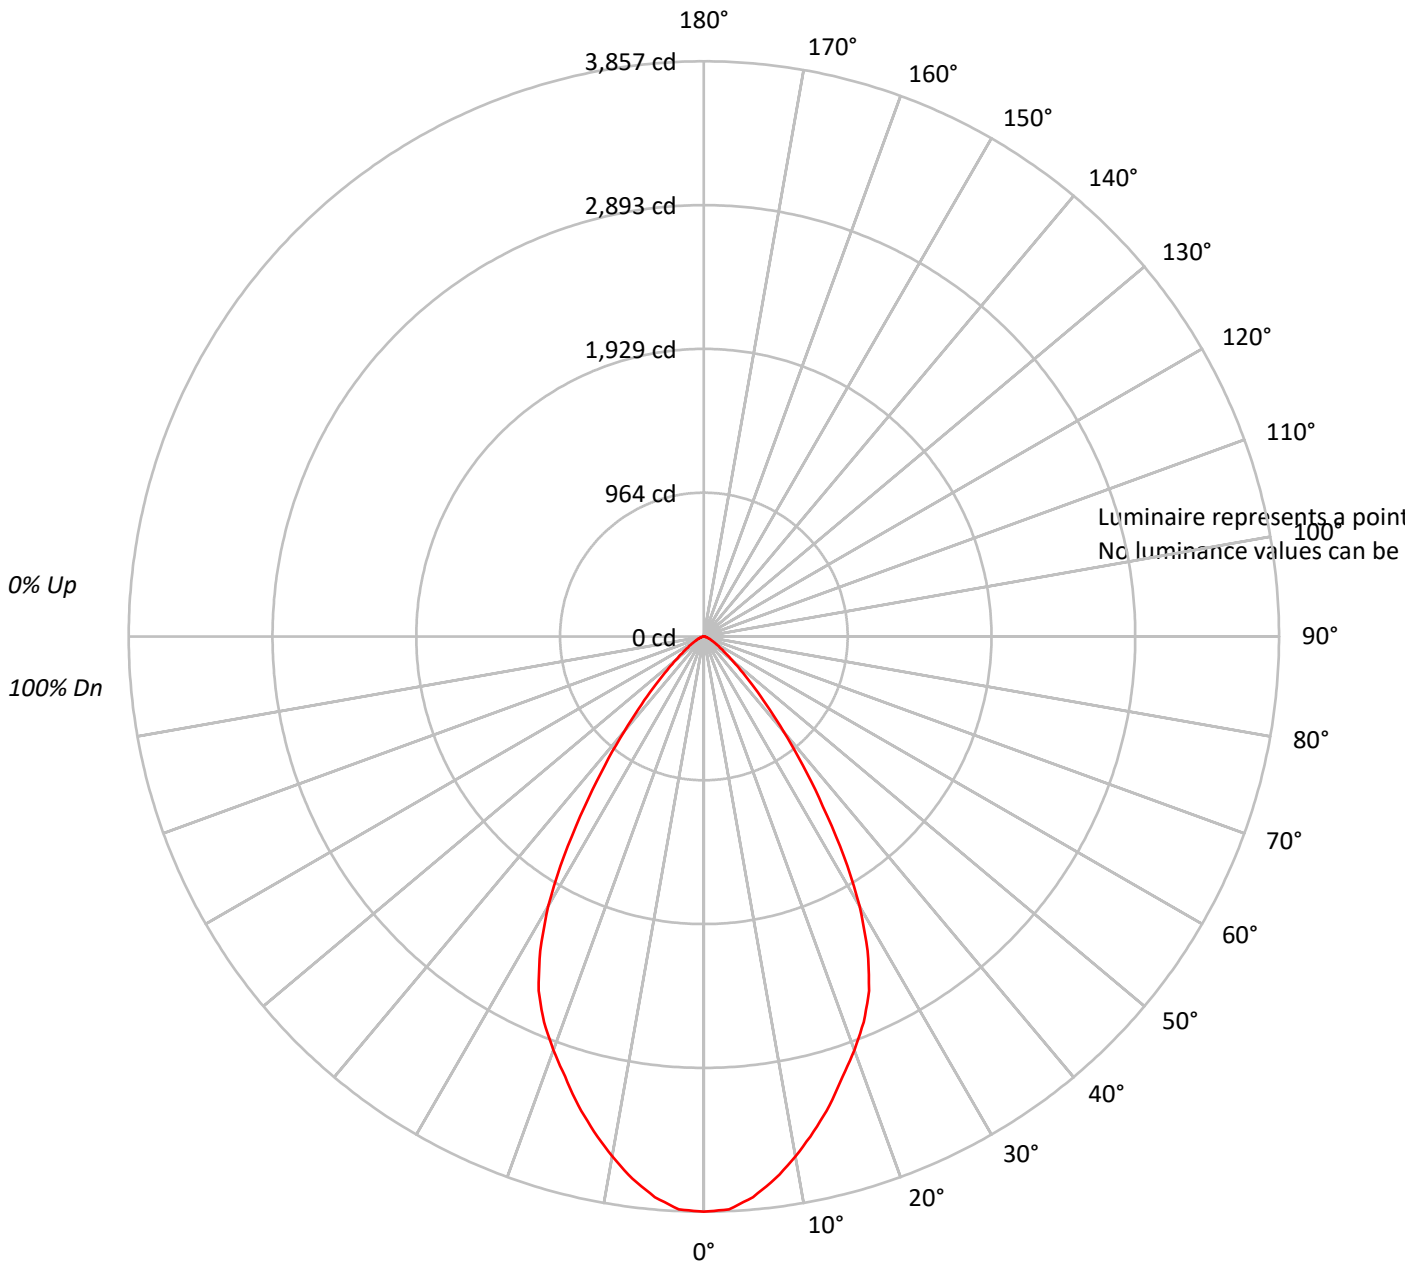



TEST NUMBER: P203298

CATALOG NUMBER: LE\_6B60D010R EC6B60709727 6LBMH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	92																			
2	107	102	97	93	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	84	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	78	74	80	76	73	72																			
5	90	81	75	70	88	80	74	70	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	75	69	64	73	68	64	72	67	63	70	66	63	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	76	66	60	55	75	65	59	55	64	59	55	63	58	55	62	58	54	53																			
9	72	62	56	51	71	61	55	51	60	55	51	60	55	51	59	54	51	49																			
10	69	58	52	48	68	58	52	48	57	52	48	56	51	48	55	51	48	46																			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P203298

CATALOG NUMBER: LE\_6B60D010R EC6B60709727 6LBMH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	352.7	9.0
10°-20°	912.3	23.4
20°-30°	1182.1	30.3
30°-40°	877.6	22.5
40°-50°	370.5	9.5
50°-60°	131.6	3.4
60°-70°	50.8	1.3
70°-80°	17.6	0.5
80°-90°	2.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2447.1	62.8
0°-40°	3324.8	85.3
0°-60°	3826.8	98.2
0°-90°	3897.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3897.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3857	
5°	3774	353
15°	3256	912
25°	2622	1182
35°	1391	878
45°	456	371
55°	139	132
65°	50	51
75°	17	18
85°	0	2
90°	0	



TEST NUMBER: P203298

CATALOG NUMBER: LE\_6B60D010R EC6B60709727 6LBMH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3857.0
2.5°	3845.9
5°	3773.5
7.5°	3667.8
10°	3539.8
12.5°	3400.6
15°	3255.9
17.5°	3094.5
20°	2949.9
22.5°	2799.5
25°	2621.5
27.5°	2376.5
30°	2087.1
32.5°	1747.6
35°	1391.4
37.5°	1090.9
40°	829.2
42.5°	617.8
45°	456.4
47.5°	334.0
50°	244.9
52.5°	183.6
55°	139.1
57.5°	105.8
60°	83.5
62.5°	61.2
65°	50.1
67.5°	39.0
70°	27.9
72.5°	22.2
75°	16.8
77.5°	11.1
80°	5.6
82.5°	5.6
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)