

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205252

Luminaire Tested: **LE_6B60D010R EC6B60709727 6LBWLI1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P205252
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709727 6LBWL1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5388.0 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P205252

CATALOG NUMBER: LE_6B60D010R EC6B60709727 6LBWL11

Luminous Intensity Polar Plot

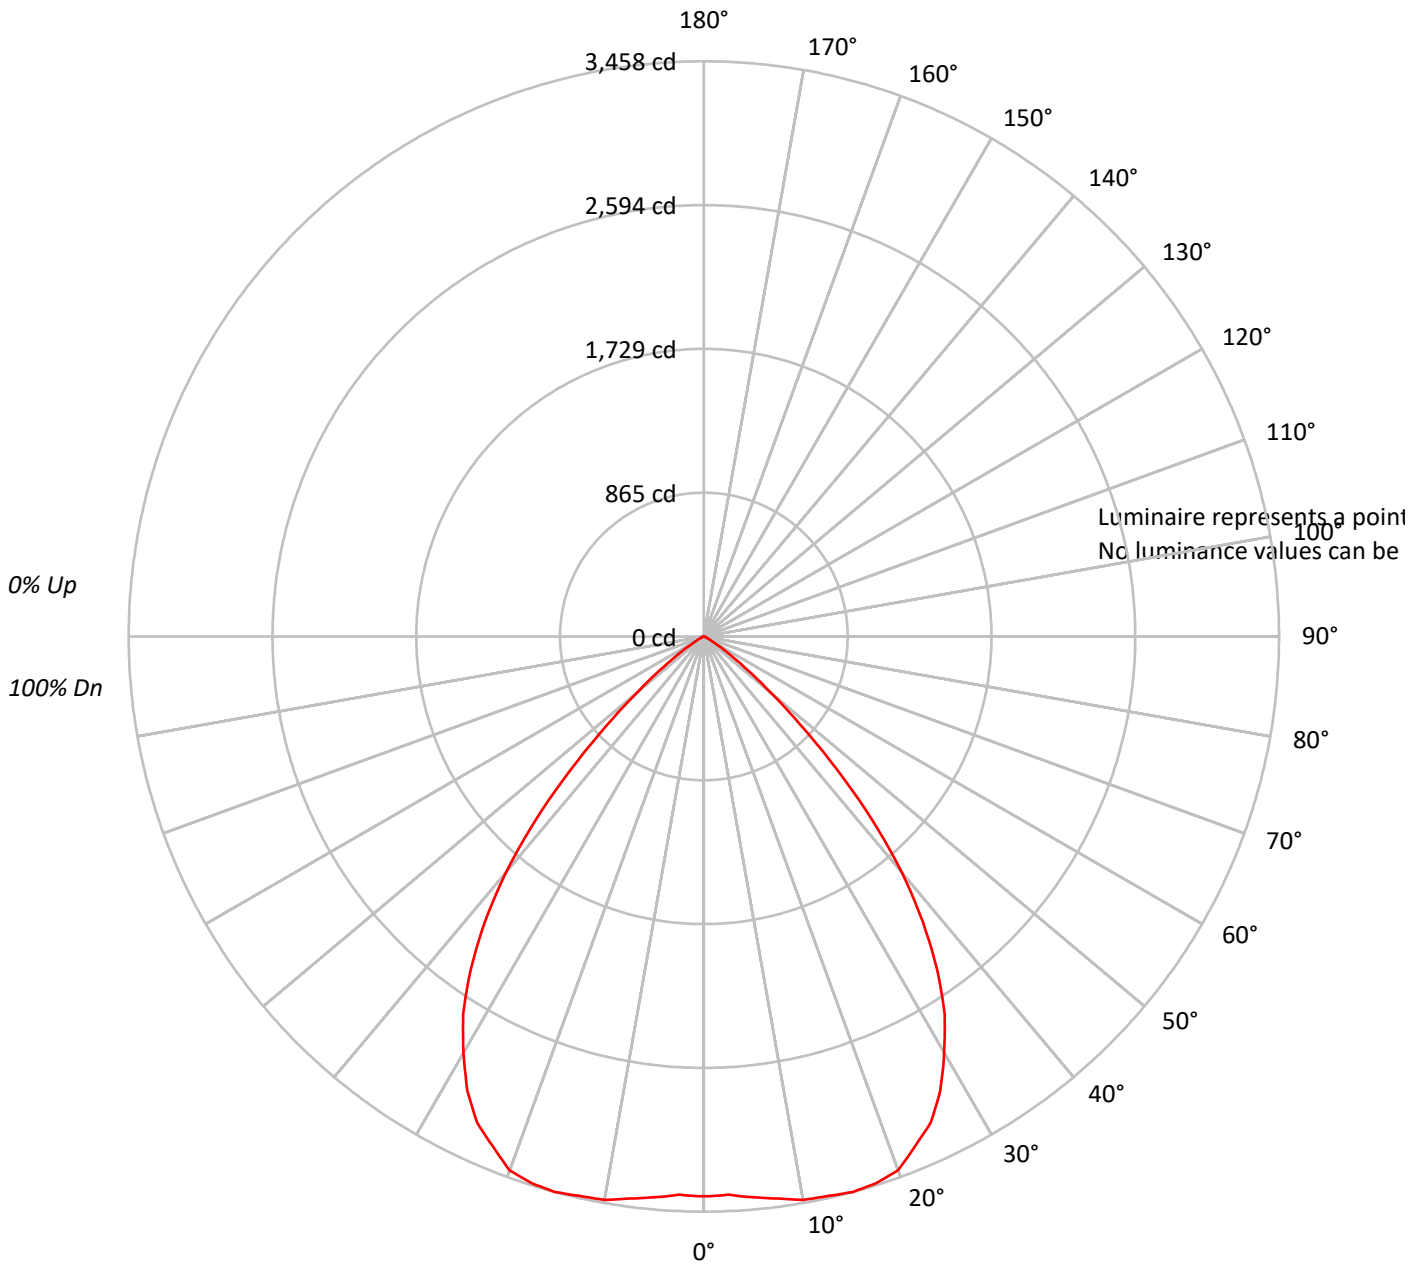



TEST NUMBER: P205252

CATALOG NUMBER: LE_6B60D010R EC6B60709727 6LBWL11

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92																			
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83																			
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76																			
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69																			
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63																			
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57																			
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52																			
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48																			
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44																			
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P205252

CATALOG NUMBER: LE_6B60D010R EC6B60709727 6LBWLI1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	324.7	6.0
10°-20°	976.0	18.1
20°-30°	1471.3	27.3
30°-40°	1505.9	27.9
40°-50°	877.3	16.3
50°-60°	201.6	3.7
60°-70°	24.8	0.5
70°-80°	6.4	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2772.0	51.4
0°-40°	4277.9	79.4
0°-60°	5356.8	99.4
0°-90°	5388.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5388.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3366	
5°	3384	325
15°	3458	976
25°	3226	1471
35°	2444	1506
45°	1130	877
55°	196	202
65°	18	25
75°	6	6
85°	0	0
90°	0	



TEST NUMBER: P205252

CATALOG NUMBER: LE_6B60D010R EC6B60709727 6LBWL11

CANDELA DISTRIBUTION (FULL):

	0°
0°	3366.0
2.5°	3359.9
5°	3384.4
7.5°	3408.8
10°	3439.4
12.5°	3445.4
15°	3457.6
17.5°	3445.4
20°	3414.9
22.5°	3317.1
25°	3225.5
27.5°	3078.9
30°	2889.5
32.5°	2694.0
35°	2443.6
37.5°	2162.5
40°	1851.0
42.5°	1502.8
45°	1130.1
47.5°	788.0
50°	519.2
52.5°	329.9
55°	195.5
57.5°	103.9
60°	55.0
62.5°	30.5
65°	18.4
67.5°	18.4
70°	12.2
72.5°	6.1
75°	6.1
77.5°	6.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)