

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204732

Luminaire Tested: **LE_6B60D010R EC6B60708030 6LBPSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204732
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60708030 6LBPSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8107.6 lumens
Efficiency: N/A
Efficacy: 129.7 lumens/watt
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204732

CATALOG NUMBER: LE_6B60D010R EC6B60708030 6LBPSMW1

Luminous Intensity Polar Plot

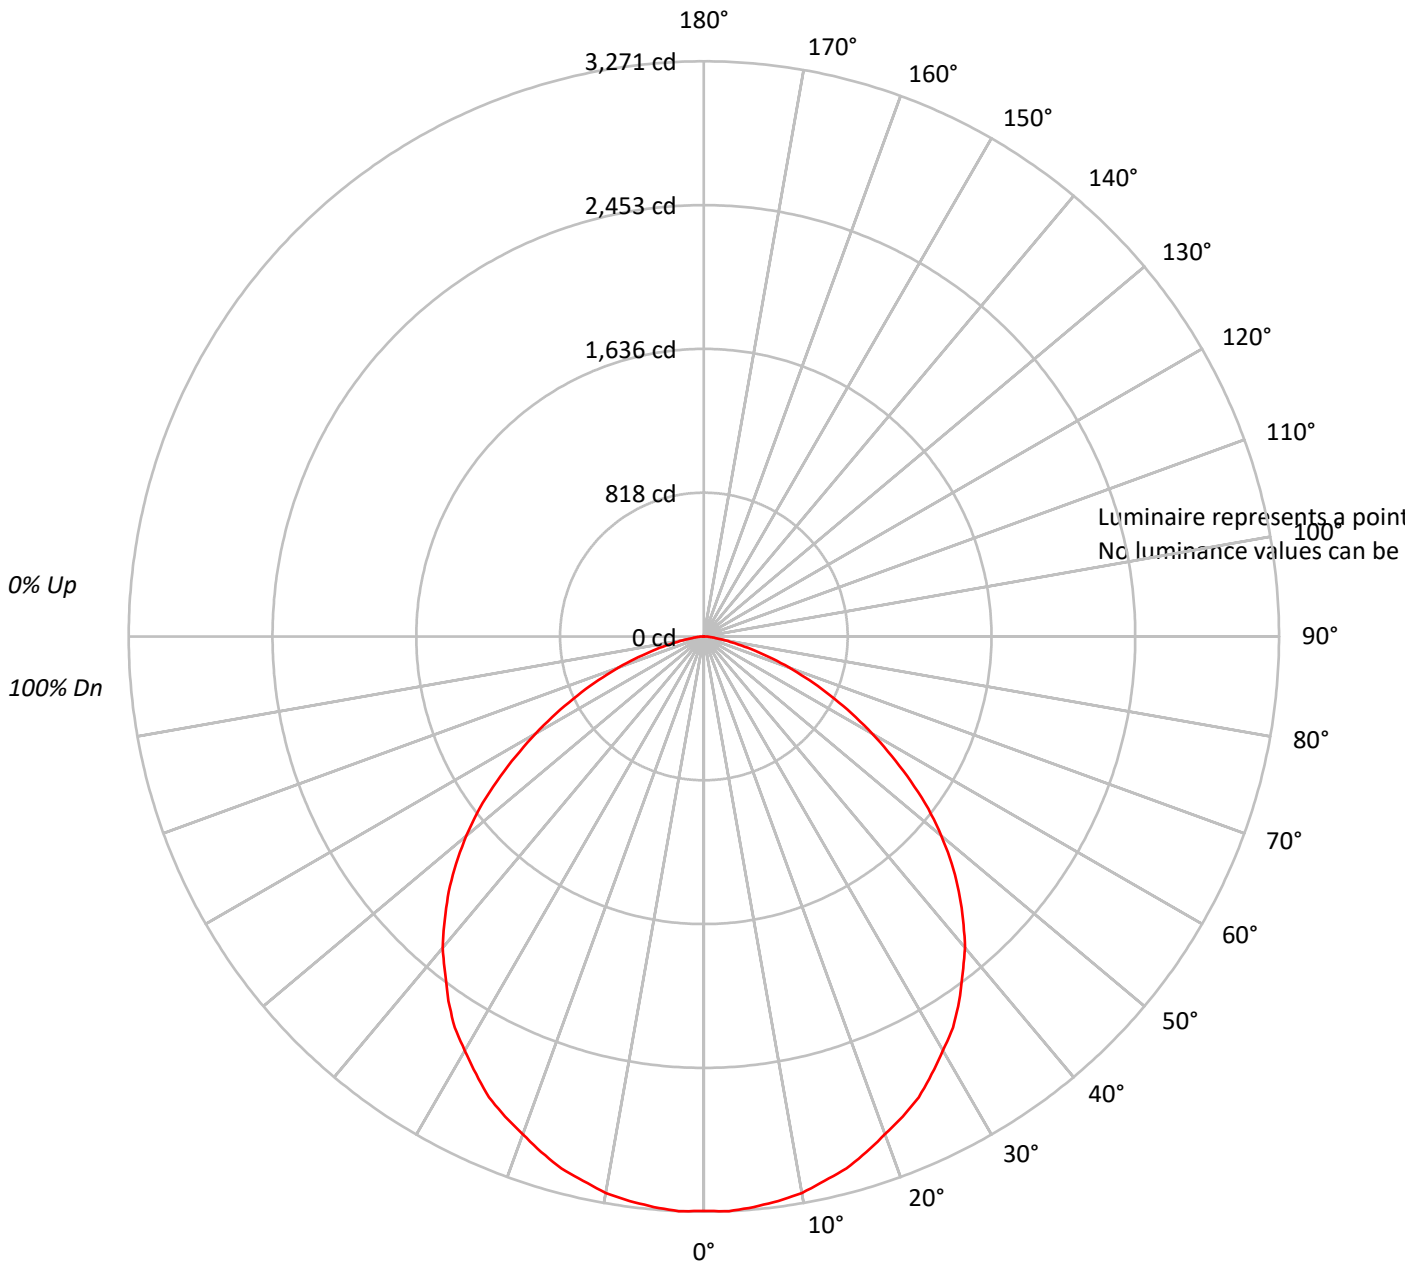



TEST NUMBER: P204732

CATALOG NUMBER: LE_6B60D010R EC6B60708030 6LBPSMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	66	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204732

CATALOG NUMBER: LE_6B60D010R EC6B60708030 6LBPSMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	309.5	3.8
10°-20°	882.3	10.9
20°-30°	1328.7	16.4
30°-40°	1581.1	19.5
40°-50°	1578.2	19.5
50°-60°	1283.4	15.8
60°-70°	789.6	9.7
70°-80°	305.9	3.8
80°-90°	49.0	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2520.5	31.1
0°-40°	4101.6	50.6
0°-60°	6963.2	85.9
0°-90°	8107.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8107.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3267	
5°	3257	310
15°	3132	882
25°	2892	1329
35°	2532	1581
45°	2051	1578
55°	1436	1283
65°	793	790
75°	279	306
85°	38	49
90°	0	



TEST NUMBER: P204732

CATALOG NUMBER: LE_6B60D010R EC6B60708030 6LBPSMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3266.6
2.5°	3271.4
5°	3257.0
7.5°	3237.8
10°	3213.8
12.5°	3170.5
15°	3132.1
17.5°	3074.5
20°	3012.0
22.5°	2954.4
25°	2891.9
27.5°	2805.5
30°	2719.0
32.5°	2637.4
35°	2531.6
37.5°	2416.4
40°	2310.6
42.5°	2181.0
45°	2051.2
47.5°	1911.9
50°	1763.0
52.5°	1609.2
55°	1436.4
57.5°	1268.2
60°	1104.9
62.5°	946.4
65°	792.6
67.5°	648.5
70°	514.0
72.5°	389.1
75°	278.6
77.5°	182.5
80°	110.5
82.5°	67.2
85°	38.4
87.5°	19.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)