

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204318

Luminaire Tested: **LE\_6B60D010R EC6B60708030 6LBSWH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204318  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B60D010R EC6B60708030 6LBSWH1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH WHEAT TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7817.1 lumens  
Efficiency: N/A  
Efficacy: 125.1 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1.08  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct

Input Watts (W): 62.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204318  
CATALOG NUMBER: LE\_6B60D010R EC6B60708030 6LBSWH1

### Luminous Intensity Polar Plot

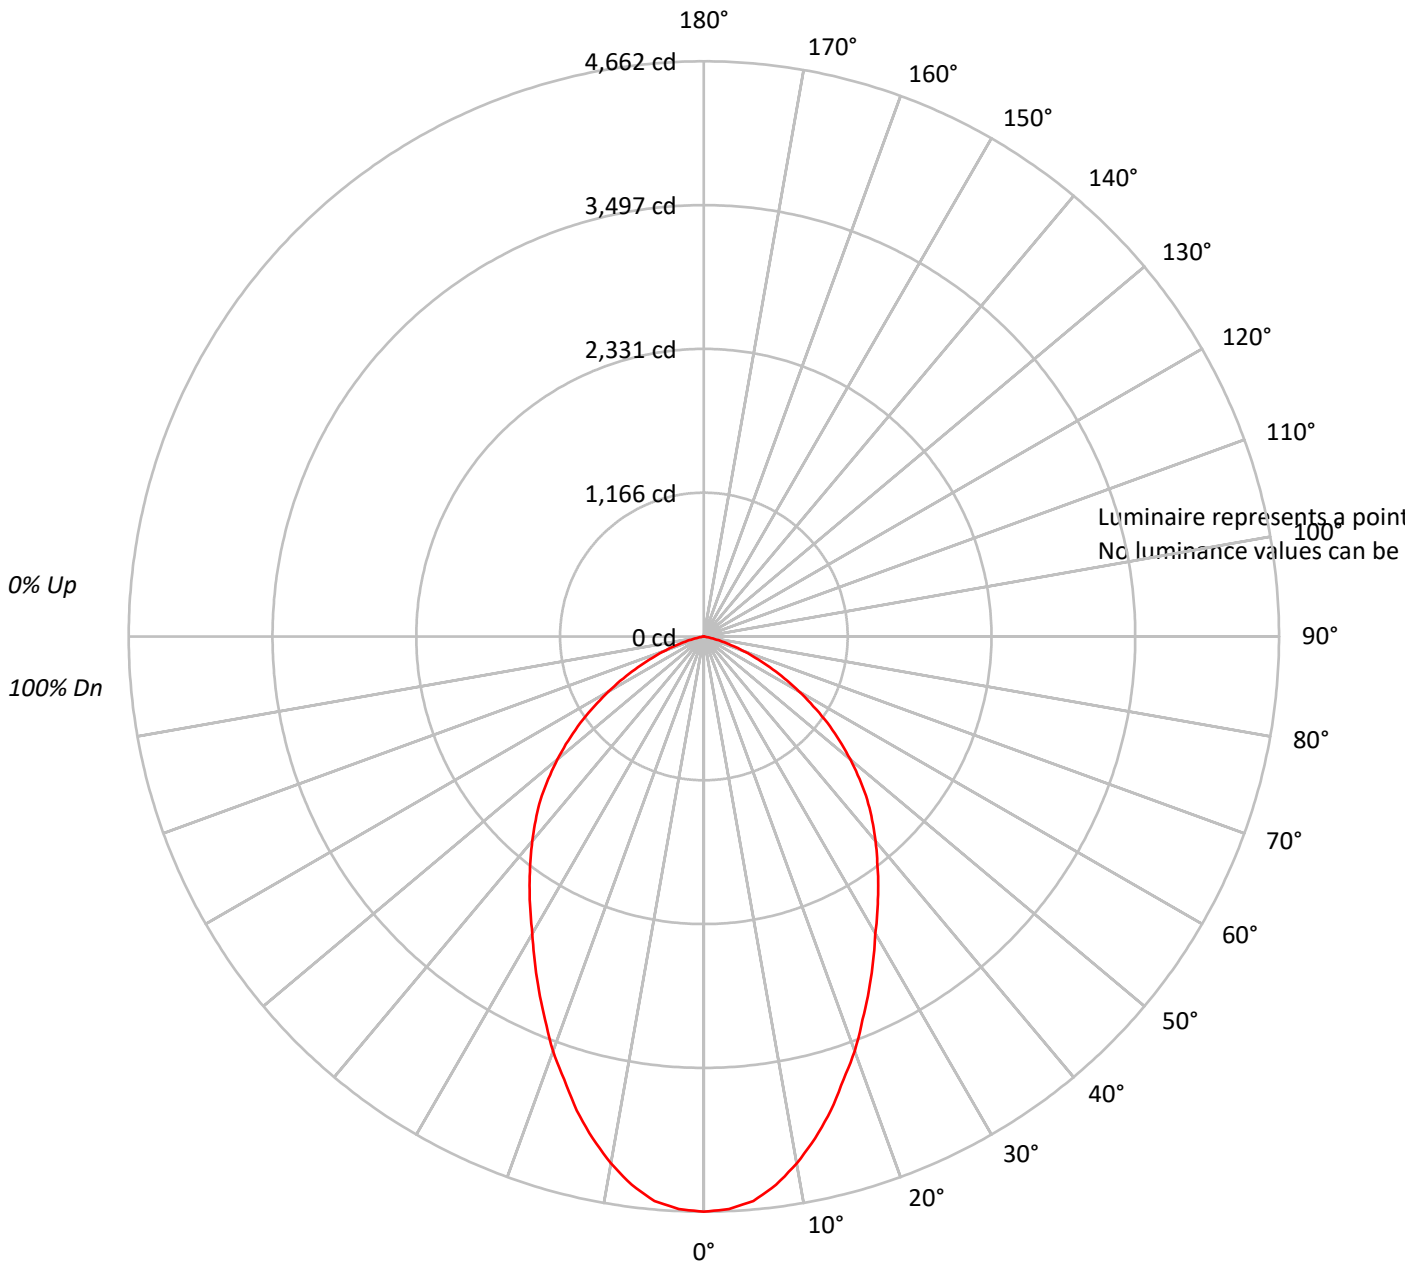



TEST NUMBER: P204318

CATALOG NUMBER: LE\_6B60D010R EC6B60708030 6LBSWH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	89				89
2	103	96	90	85	100	94	89	84	91	86	83	87	84	81	85	82	79	77				77
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67				67
4	88	77	70	64	86	76	69	63	74	68	63	72	66	62	69	65	61	59				59
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52				52
6	76	64	56	50	74	63	55	50	61	54	49	60	54	49	58	53	49	47				47
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	54	48	44	42				42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38				38
9	62	50	42	37	61	49	42	37	48	41	37	47	41	37	46	41	37	35				35
10	58	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32				32

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204318

CATALOG NUMBER: LE\_6B60D010R EC6B60708030 6LBSWH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	430.0	5.5
10°-20°	1113.0	14.2
20°-30°	1455.8	18.6
30°-40°	1541.4	19.7
40°-50°	1437.7	18.4
50°-60°	1088.9	13.9
60°-70°	589.7	7.5
70°-80°	158.2	2.0
80°-90°	2.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2998.7	38.4
0°-40°	4540.2	58.1
0°-60°	7066.8	90.4
0°-90°	7817.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7817.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4662	
5°	4594	430
15°	3978	1113
25°	3165	1456
35°	2464	1541
45°	1873	1438
55°	1223	1089
65°	590	590
75°	137	158
85°	0	2
90°	0	



TEST NUMBER: P204318

CATALOG NUMBER: LE\_6B60D010R EC6B60708030 6LBSWH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	4662.0
2.5°	4645.0
5°	4593.6
7.5°	4482.4
10°	4337.0
12.5°	4165.9
15°	3977.8
17.5°	3763.9
20°	3575.6
22.5°	3361.9
25°	3165.1
27.5°	2968.4
30°	2780.1
32.5°	2617.6
35°	2463.6
37.5°	2309.6
40°	2164.2
42.5°	2018.8
45°	1873.4
47.5°	1710.9
50°	1548.4
52.5°	1385.8
55°	1223.2
57.5°	1052.1
60°	889.6
62.5°	735.6
65°	590.2
67.5°	453.4
70°	333.6
72.5°	231.0
75°	136.9
77.5°	59.9
80°	17.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)