

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202573

Luminaire Tested: **LE\_6B60D010R EC6B60709030 6LBSWMH1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P202573  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B60D010R EC6B60709030 6LBSWMH1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH WARM HAZE TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6699.8 lumens  
Efficiency: N/A  
Efficacy: 107.2 lumens/watt  
Spacing Criteria (0/90/45): 0.97 / 0.97 / 1.1  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 62.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P202573

CATALOG NUMBER: LE\_6B60D010R EC6B60709030 6LBSWMH1

### Luminous Intensity Polar Plot

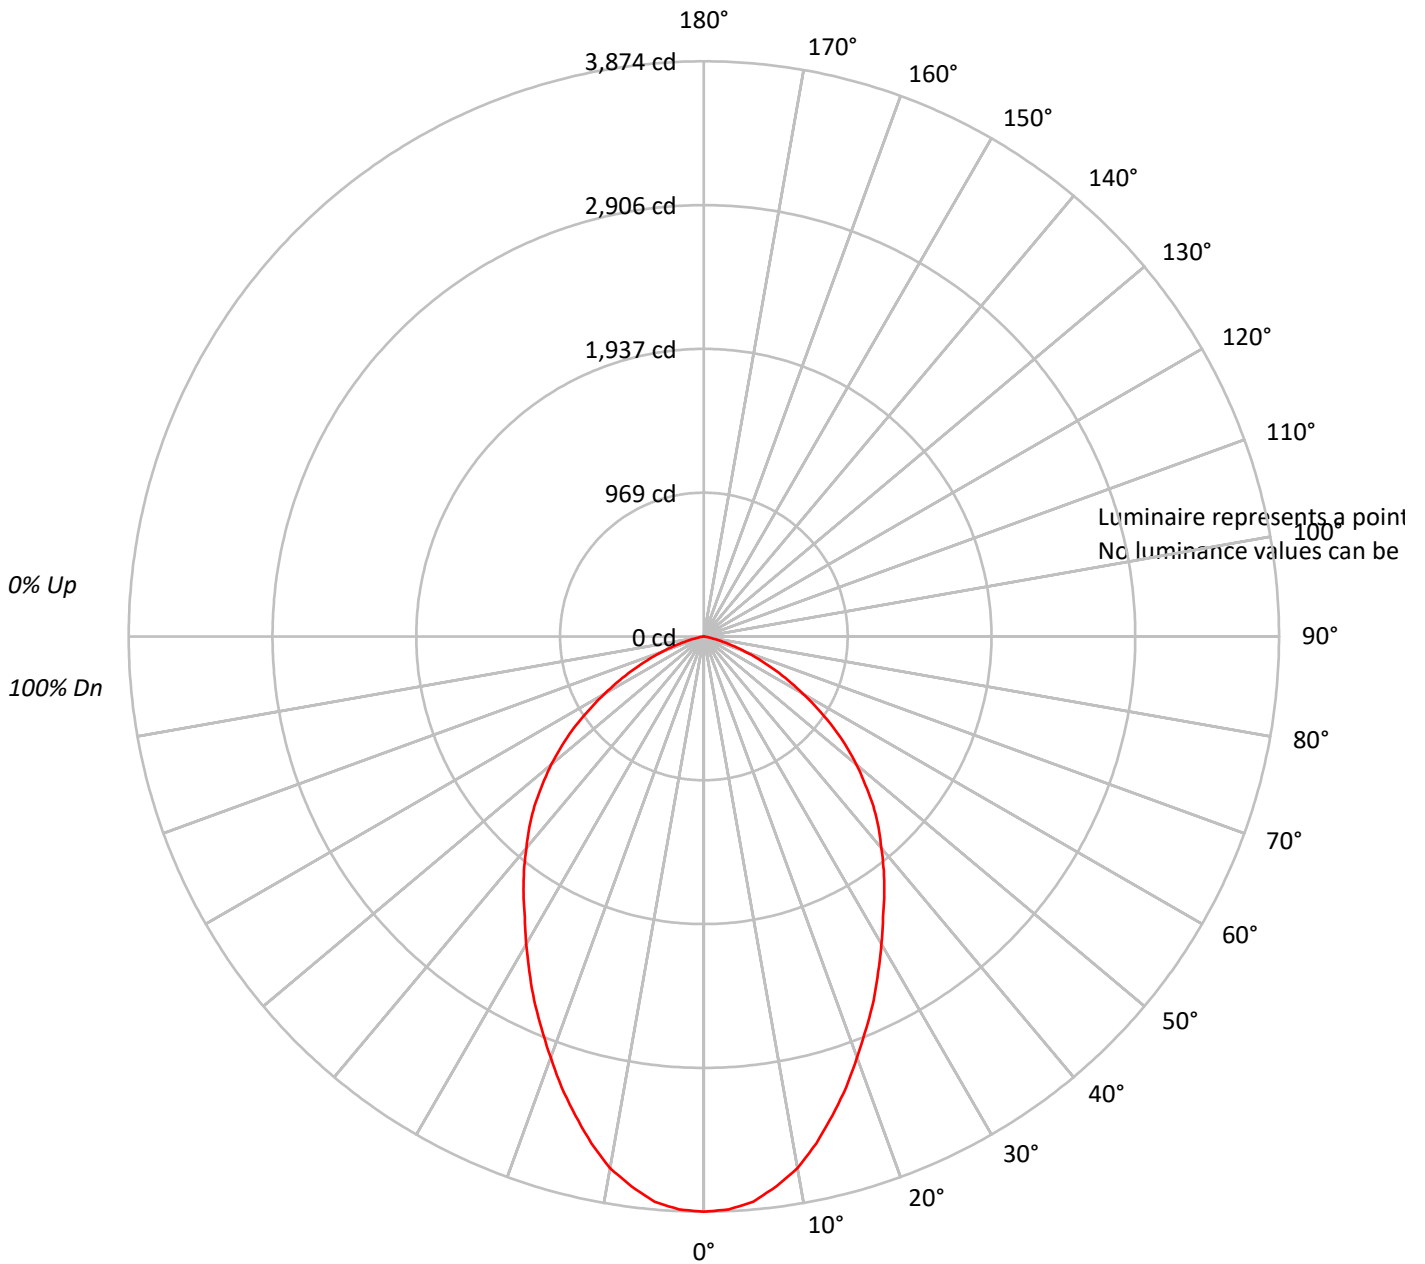



TEST NUMBER: P202573

CATALOG NUMBER: LE\_6B60D010R EC6B60709030 6LBSWMH1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	94	92	90	88			
2	103	96	90	85	100	94	89	84	91	86	82	87	84	81	84	81	79	77			
3	95	86	79	73	92	84	78	73	81	76	71	79	74	70	76	72	69	67			
4	88	77	70	64	86	76	69	63	74	67	62	71	66	62	69	65	61	59			
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52			
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	53	48	47			
7	70	58	50	45	69	57	50	45	56	49	44	55	48	44	53	48	44	42			
8	66	54	46	40	64	53	45	40	52	45	40	50	44	40	49	44	40	38			
9	62	49	42	37	61	49	42	37	48	41	37	47	41	36	46	40	36	35			
10	58	46	39	34	57	45	38	34	45	38	34	44	38	33	43	37	33	32			

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P202573

CATALOG NUMBER: LE\_6B60D010R EC6B60709030 6LBSWMH1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	358.4	5.4
10°-20°	937.0	14.0
20°-30°	1242.5	18.5
30°-40°	1325.3	19.8
40°-50°	1238.8	18.5
50°-60°	944.6	14.1
60°-70°	513.8	7.7
70°-80°	137.8	2.1
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2537.9	37.9
0°-40°	3863.2	57.7
0°-60°	6046.6	90.2
0°-90°	6699.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6699.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3874	
5°	3821	358
15°	3341	937
25°	2705	1242
35°	2118	1325
45°	1613	1239
55°	1063	945
65°	513	514
75°	119	138
85°	0	2
90°	0	



TEST NUMBER: P202573

CATALOG NUMBER: LE\_6B60D010R EC6B60709030 6LBSWMH1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3874.2
2.5°	3862.0
5°	3820.9
7.5°	3734.8
10°	3636.2
12.5°	3496.8
15°	3340.8
17.5°	3184.8
20°	3016.5
22.5°	2856.5
25°	2704.6
27.5°	2544.5
30°	2392.8
32.5°	2245.0
35°	2117.8
37.5°	1990.5
40°	1859.1
42.5°	1740.1
45°	1612.9
47.5°	1473.4
50°	1342.0
52.5°	1202.5
55°	1063.0
57.5°	911.1
60°	771.6
62.5°	640.2
65°	513.0
67.5°	398.1
70°	291.4
72.5°	201.1
75°	119.0
77.5°	53.4
80°	12.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)