

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202681

Luminaire Tested: **LE_6B60D010R EC6B60709730 6LBMWMH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202681
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709730 6LBMWMH1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH WARM HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4371.8 lumens
Efficiency: N/A
Efficacy: 69.9 lumens/watt
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.89
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202681

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBMWMH1

Luminous Intensity Polar Plot

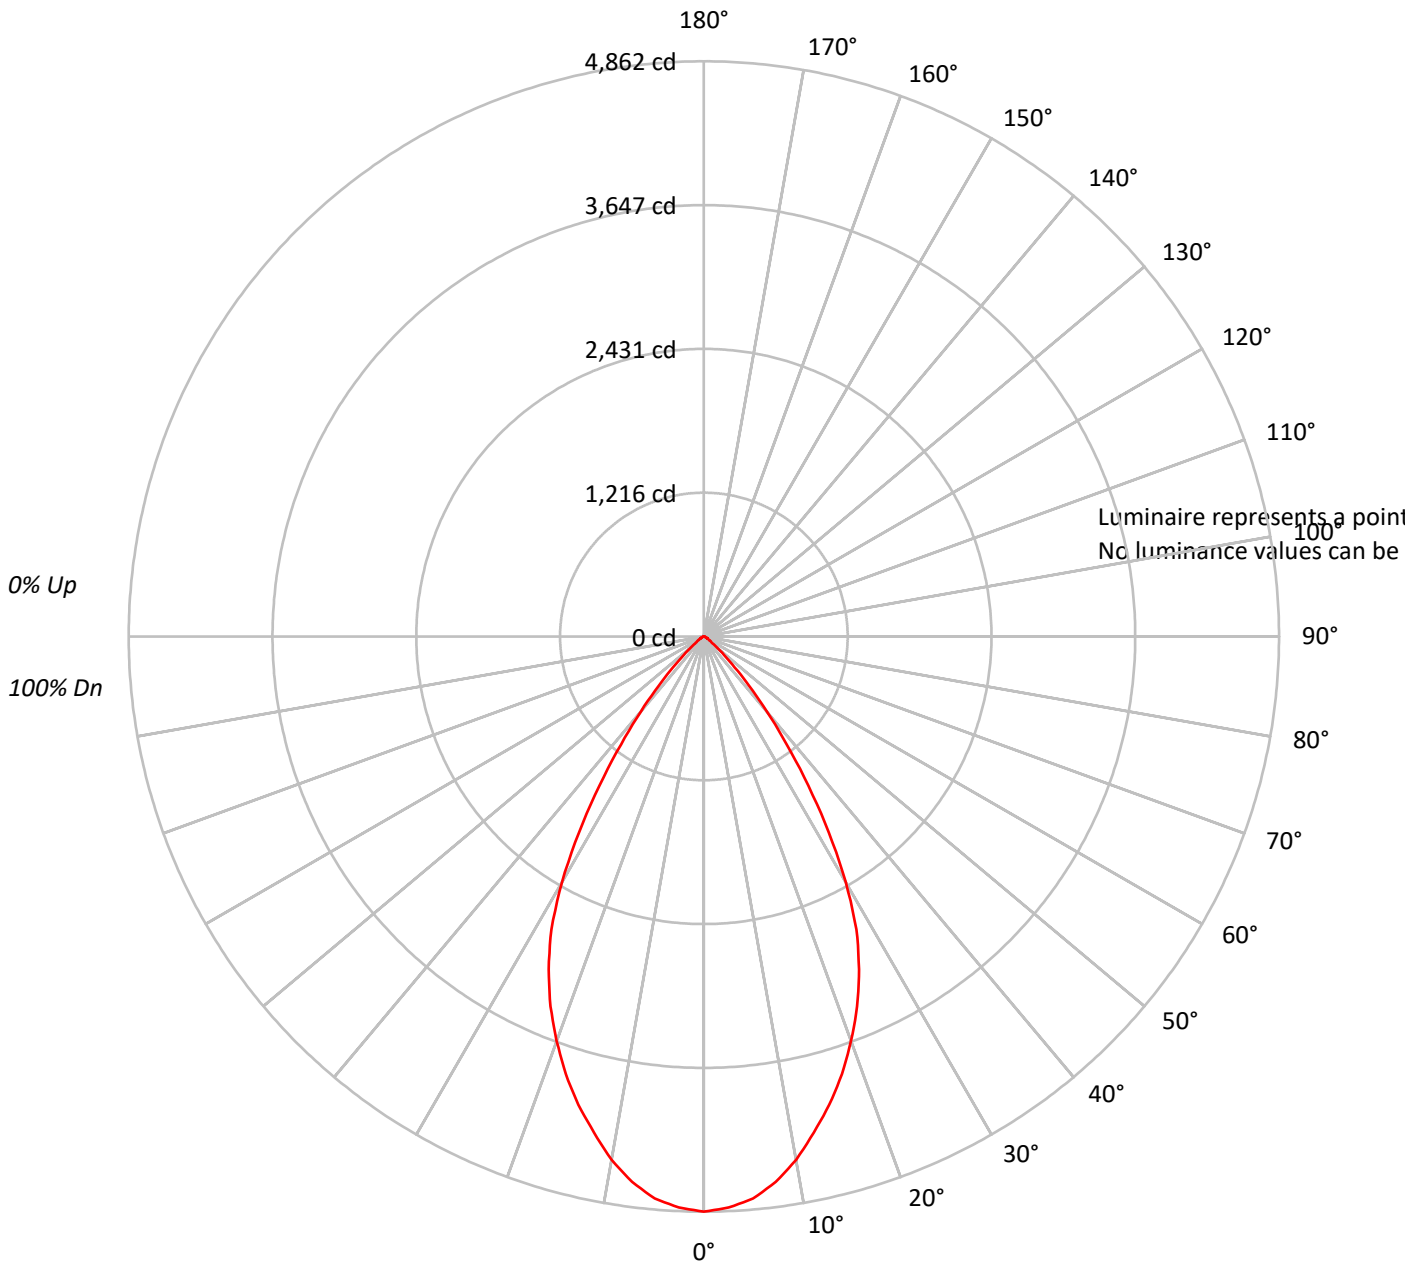



TEST NUMBER: P202681

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBMWMH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	105	101	97	94	98	95	92	95	92	90	92	90	88	86																			
3	102	95	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	83	79	95	88	83	79	86	81	78	84	80	77	82	79	76	74																			
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69																			
6	87	78	72	67	85	77	71	67	76	71	67	74	70	66	73	69	66	64																			
7	83	73	67	63	81	72	67	63	71	66	62	70	65	62	69	65	61	60																			
8	78	69	63	58	77	68	62	58	67	62	58	66	61	58	65	61	58	56																			
9	75	65	59	55	73	64	59	55	63	58	54	62	58	54	62	57	54	53																			
10	71	61	55	51	70	61	55	51	60	55	51	59	54	51	58	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202681

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBMWMH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	446.2	10.2
10°-20°	1145.5	26.2
20°-30°	1407.0	32.2
30°-40°	964.7	22.1
40°-50°	310.1	7.1
50°-60°	62.8	1.4
60°-70°	24.7	0.6
70°-80°	9.3	0.2
80°-90°	1.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2998.7	68.6
0°-40°	3963.4	90.7
0°-60°	4336.3	99.2
0°-90°	4371.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4371.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4862	
5°	4769	446
15°	4098	1145
25°	3104	1407
35°	1539	965
45°	367	310
55°	63	63
65°	26	25
75°	7	9
85°	0	2
90°	0	



TEST NUMBER: P202681

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBMWMH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4861.8
2.5°	4832.1
5°	4769.1
7.5°	4650.4
10°	4491.0
12.5°	4294.4
15°	4097.9
17.5°	3879.0
20°	3638.0
22.5°	3385.9
25°	3104.0
27.5°	2792.5
30°	2399.4
32.5°	1965.5
35°	1539.0
37.5°	1149.6
40°	827.0
42.5°	563.6
45°	367.1
47.5°	226.2
50°	137.2
52.5°	85.2
55°	63.0
57.5°	48.2
60°	37.1
62.5°	29.6
65°	26.0
67.5°	18.5
70°	14.9
72.5°	11.1
75°	7.4
77.5°	7.4
80°	3.8
82.5°	3.8
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)