

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204432

Luminaire Tested: **LE_6B60D010R EC6B60709730 6LBSGPH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204432
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709730 6LBSGPH1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH GRAPHITE HAZE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5324.7 lumens
Efficiency: N/A
Efficacy: 85.2 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.26
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204432

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBSGPH1

Luminous Intensity Polar Plot

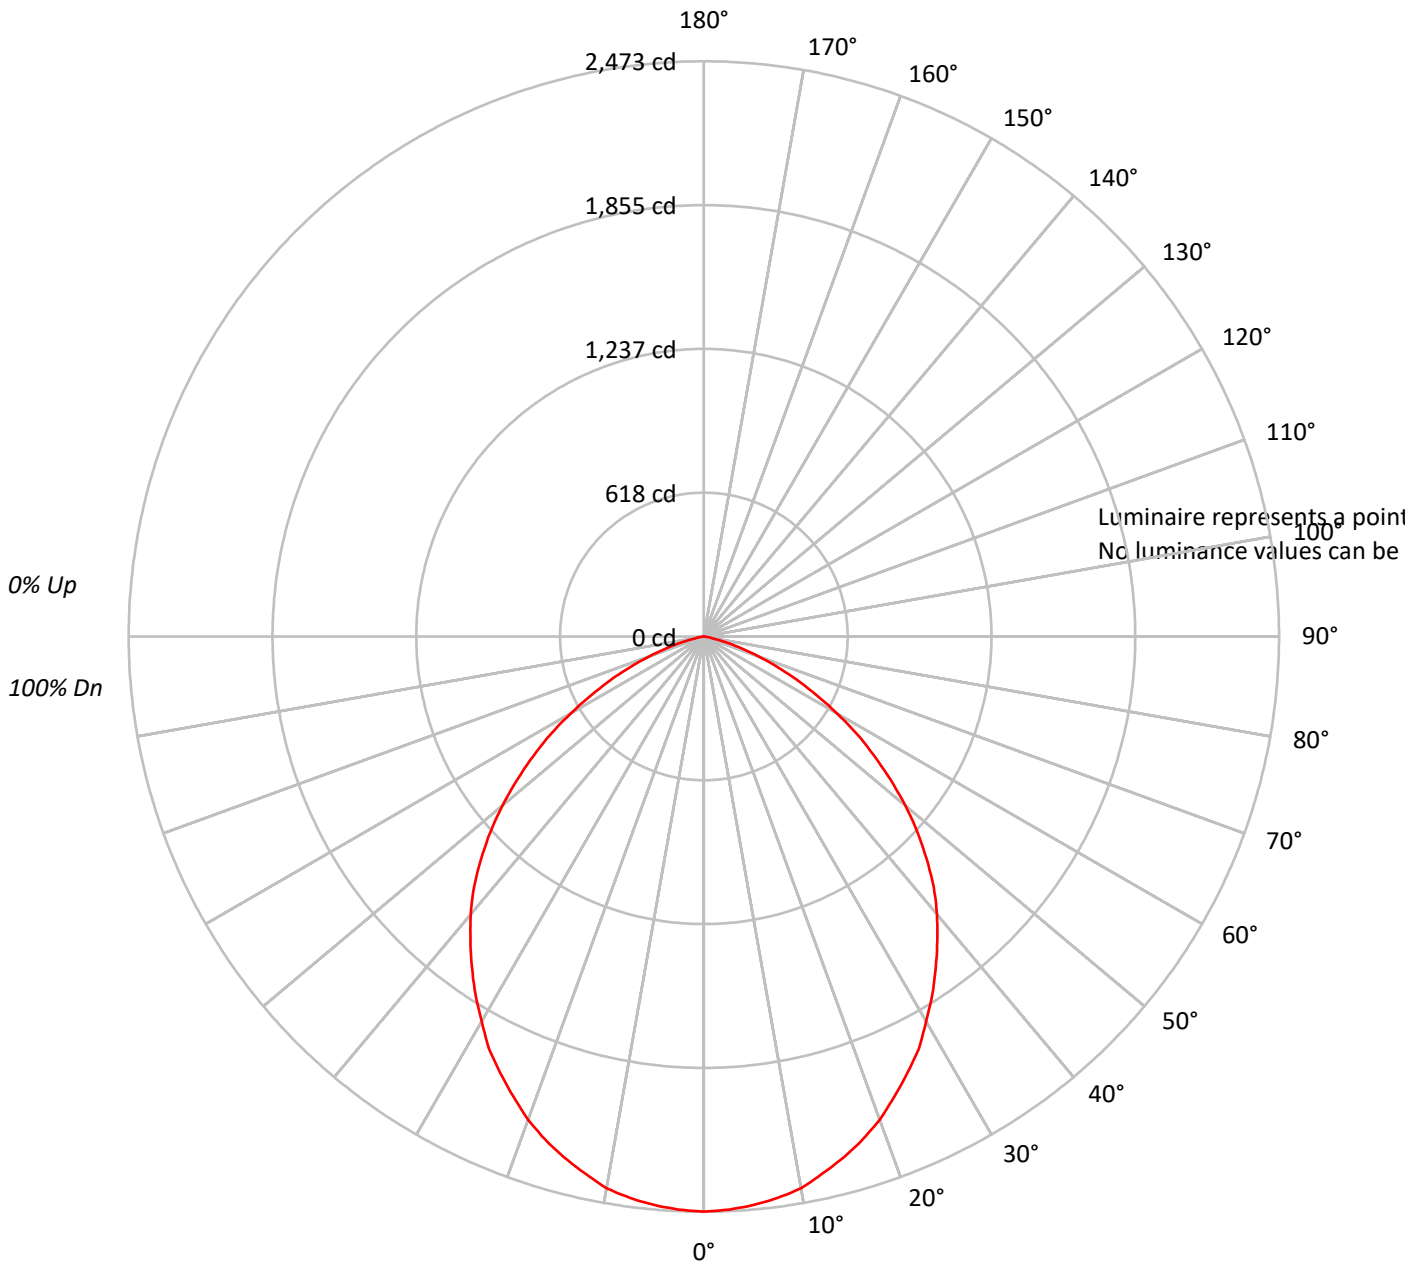



TEST NUMBER: P204432

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBSGPH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	103	100	108	105	102	99	101	98	96	97	95	93	93	91	90	88																			
2	102	95	89	84	100	93	88	83	90	85	82	87	83	80	84	81	78	76																			
3	94	85	78	72	92	83	77	71	80	75	70	78	73	69	75	71	68	66																			
4	87	76	68	62	85	75	67	62	72	66	61	70	65	60	68	63	59	57																			
5	80	68	60	54	78	67	60	54	65	59	53	63	58	53	62	56	52	50																			
6	74	62	54	48	73	61	53	48	59	52	47	58	52	47	56	51	47	45																			
7	69	57	48	43	68	56	48	43	54	47	42	53	47	42	52	46	42	40																			
8	65	52	44	38	63	51	44	38	50	43	38	49	42	38	48	42	38	36																			
9	60	48	40	35	59	47	40	35	46	39	35	45	39	34	44	38	34	32																			
10	57	44	37	32	56	44	36	32	43	36	31	42	36	31	41	35	31	30																			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204432

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBSGPH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.8	4.4
10°-20°	653.6	12.3
20°-30°	953.3	17.9
30°-40°	1087.1	20.4
40°-50°	1042.8	19.6
50°-60°	798.6	15.0
60°-70°	438.2	8.2
70°-80°	116.5	2.2
80°-90°	1.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1839.7	34.6
0°-40°	2926.8	55.0
0°-60°	4768.2	89.5
0°-90°	5324.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5324.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2473	
5°	2454	233
15°	2320	654
25°	2070	953
35°	1738	1087
45°	1355	1043
55°	895	799
65°	441	438
75°	102	117
85°	0	2
90°	0	



TEST NUMBER: P204432

CATALOG NUMBER: LE_6B60D010R EC6B60709730 6LBSGPH1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2473.0
2.5°	2466.6
5°	2453.9
7.5°	2434.8
10°	2409.1
12.5°	2364.4
15°	2319.8
17.5°	2268.6
20°	2211.0
22.5°	2140.8
25°	2070.5
27.5°	2000.1
30°	1910.8
32.5°	1827.6
35°	1738.1
37.5°	1648.8
40°	1559.2
42.5°	1463.4
45°	1354.8
47.5°	1246.1
50°	1131.1
52.5°	1009.6
55°	894.6
57.5°	779.6
60°	658.2
62.5°	543.1
65°	440.9
67.5°	338.6
70°	249.2
72.5°	166.1
75°	102.2
77.5°	44.8
80°	12.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)