

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P205253

Luminaire Tested: **LE\_6B60D010R EC6B60709730 6LBWLI1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P205253  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B60D010R EC6B60709730 6LBWL1  
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT  
WIDE DISTRIBUTION WITH SPECULAR CLEAR TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5631.2 lumens  
Efficiency: N/A  
Efficacy: 90.1 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.18  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 62.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P205253

CATALOG NUMBER: LE\_6B60D010R EC6B60709730 6LBWL11

### Luminous Intensity Polar Plot

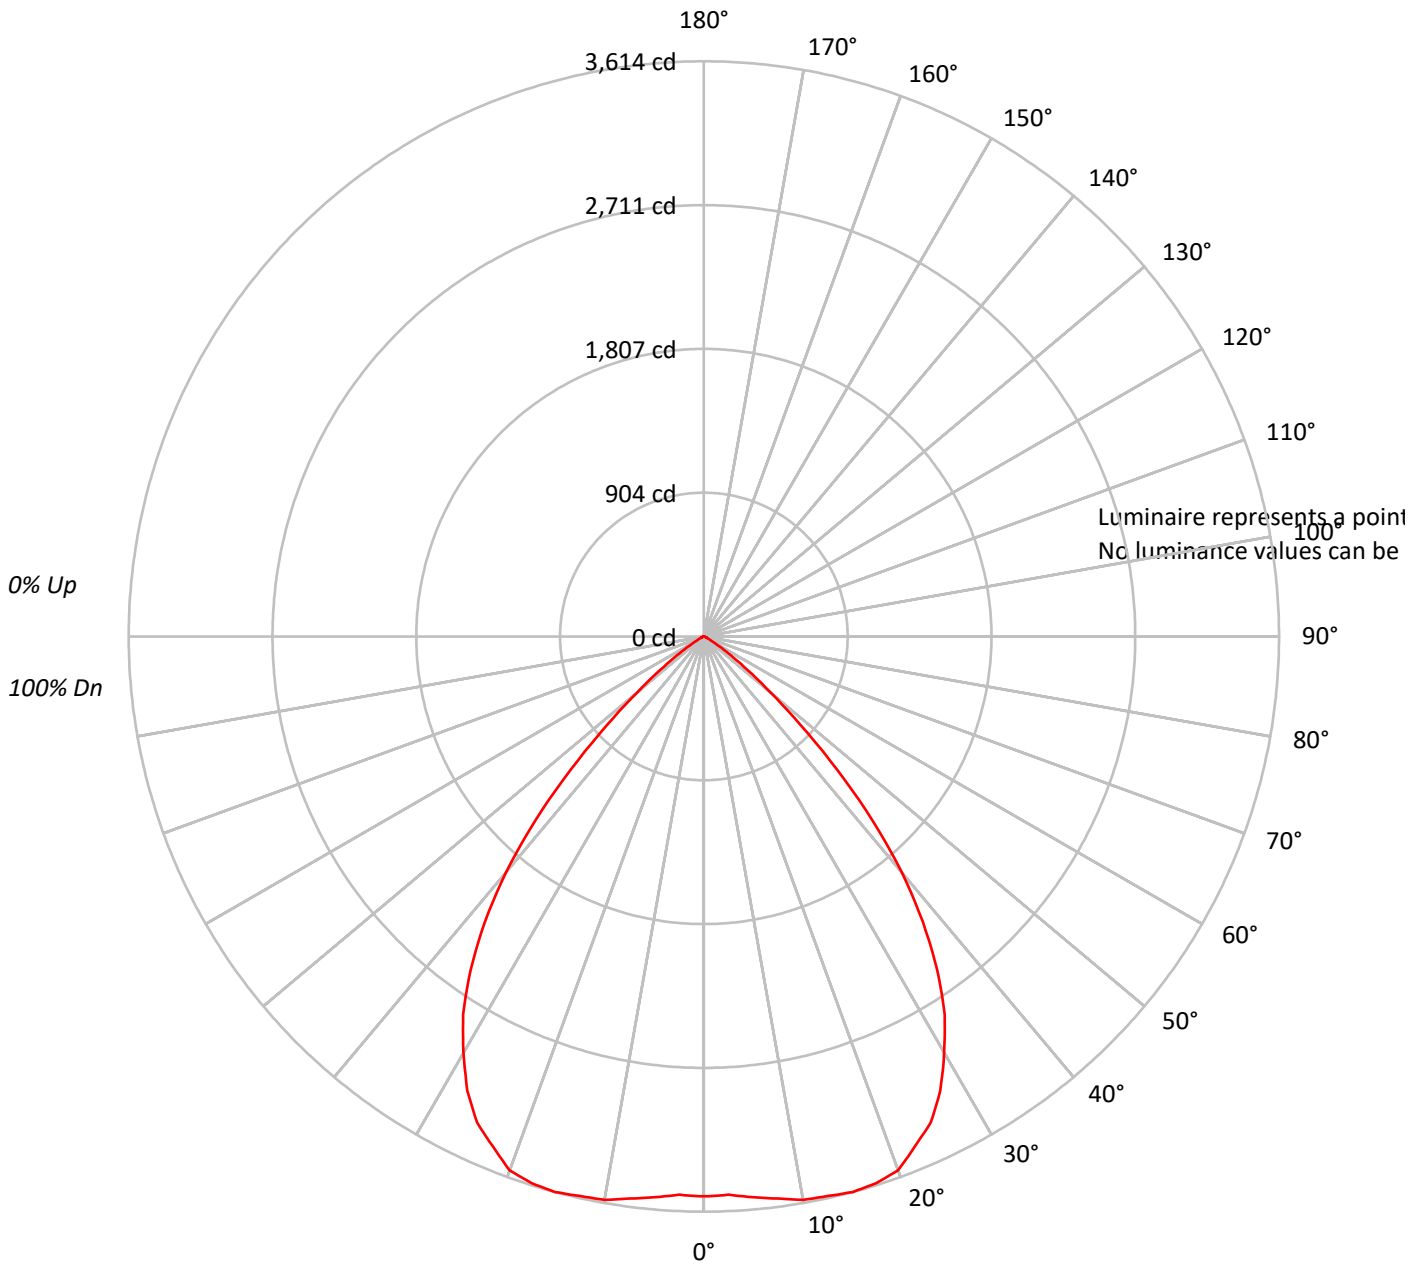



TEST NUMBER: P205253

CATALOG NUMBER: LE\_6B60D010R EC6B60709730 6LBWL11

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100											100																	
1	113	110	107	104	110	107	105	103	103	101	99	100	98	97	96	95	94	92											92																	
2	106	101	96	92	104	99	95	91	95	92	89	92	90	87	90	87	85	83											83																	
3	100	92	87	82	97	91	86	81	88	84	80	86	82	79	83	80	77	76											76																	
4	93	85	78	73	92	84	78	73	81	76	72	79	75	71	77	74	70	69											69																	
5	88	78	71	66	86	77	71	66	75	70	65	73	69	65	72	68	64	63											63																	
6	82	72	65	60	81	71	65	60	70	64	59	68	63	59	67	62	59	57											57																	
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52											52																	
8	73	62	55	50	71	61	55	50	60	54	50	59	54	50	58	53	49	48											48																	
9	69	57	51	46	67	57	50	46	56	50	46	55	50	46	54	49	46	44											44																	
10	65	54	47	43	64	53	47	42	52	46	42	51	46	42	51	46	42	41											41																	

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P205253

CATALOG NUMBER: LE\_6B60D010R EC6B60709730 6LBWLI1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	339.4	6.0
10°-20°	1020.1	18.1
20°-30°	1537.7	27.3
30°-40°	1573.9	27.9
40°-50°	916.9	16.3
50°-60°	210.7	3.7
60°-70°	25.9	0.5
70°-80°	6.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2897.1	51.4
0°-40°	4471.0	79.4
0°-60°	5598.5	99.4
0°-90°	5631.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5631.2	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3518	
5°	3537	339
15°	3614	1020
25°	3371	1538
35°	2554	1574
45°	1181	917
55°	204	211
65°	19	26
75°	6	7
85°	0	0
90°	0	



TEST NUMBER: P205253

CATALOG NUMBER: LE\_6B60D010R EC6B60709730 6LBWL11

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3517.9
2.5°	3511.5
5°	3537.0
7.5°	3562.6
10°	3594.5
12.5°	3600.9
15°	3613.6
17.5°	3600.9
20°	3569.0
22.5°	3466.9
25°	3371.0
27.5°	3217.9
30°	3019.9
32.5°	2815.6
35°	2553.9
37.5°	2260.1
40°	1934.5
42.5°	1570.6
45°	1181.1
47.5°	823.6
50°	542.8
52.5°	344.8
55°	204.2
57.5°	108.5
60°	57.5
62.5°	31.9
65°	19.1
67.5°	19.1
70°	12.8
72.5°	6.4
75°	6.4
77.5°	6.4
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)