

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204836

Luminaire Tested: **LE_6B60D010R EC6B60708035 6LBCSMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204836
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60708035 6LBCSMW1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8409.2 lumens
Efficiency: N/A
Efficacy: 134.5 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204836

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBSCMW1

Luminous Intensity Polar Plot

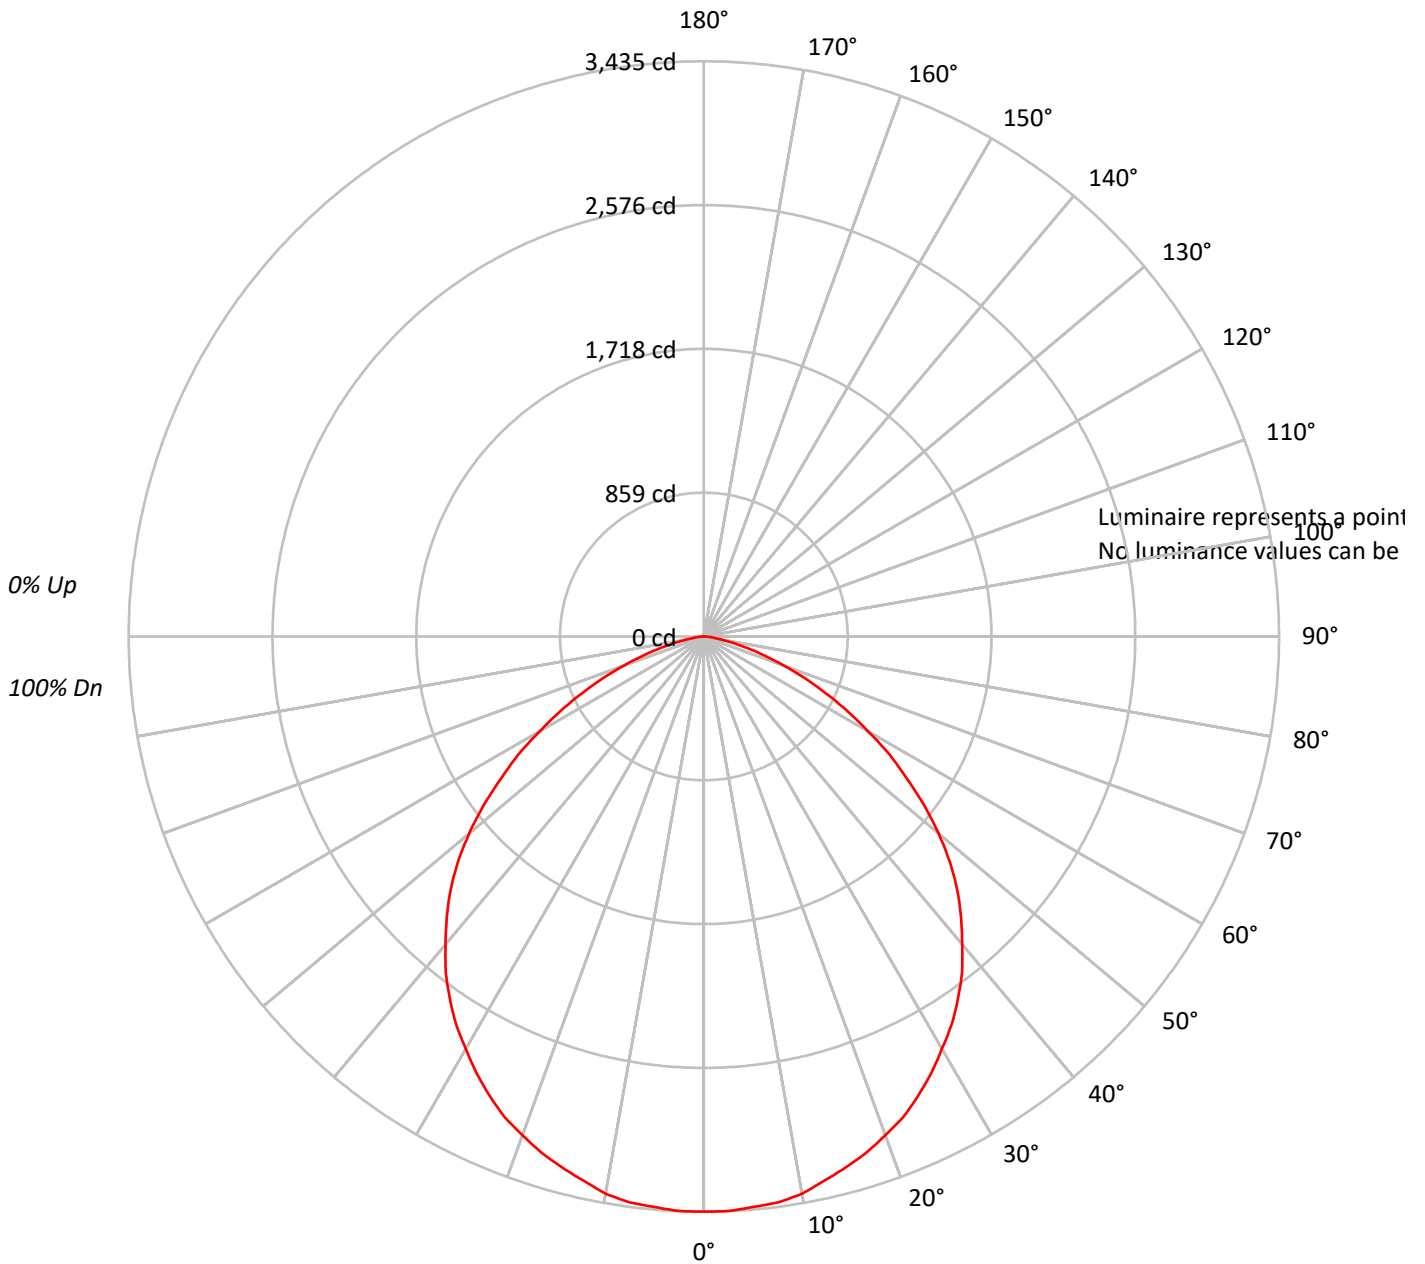



TEST NUMBER: P204836

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBSCMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	110	106	102	99	108	104	100	97	100	97	94	96	93	91	92	90	89	87			
2	101	94	87	82	99	92	86	81	88	84	79	85	81	78	82	79	76	74			
3	93	83	75	70	90	81	74	69	79	73	68	76	71	67	73	69	65	63			
4	85	74	66	60	83	73	65	59	70	64	58	68	62	58	66	61	57	55			
5	79	66	58	52	77	65	57	51	63	56	51	61	55	50	60	54	50	48			
6	73	60	52	45	71	59	51	45	57	50	45	56	49	44	54	49	44	42			
7	68	55	46	40	66	54	46	40	52	45	40	51	44	40	50	44	39	37			
8	63	50	42	36	61	49	41	36	48	41	36	47	40	36	46	40	35	33			
9	59	46	38	33	57	45	38	32	44	37	32	43	37	32	42	36	32	30			
10	55	42	35	30	54	42	34	30	41	34	29	40	34	29	39	33	29	27			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204836

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBSCMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	325.4	3.9
10°-20°	926.4	11.0
20°-30°	1393.7	16.6
30°-40°	1651.6	19.6
40°-50°	1643.6	19.5
50°-60°	1325.0	15.8
60°-70°	801.5	9.5
70°-80°	297.6	3.5
80°-90°	44.3	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2645.5	31.5
0°-40°	4297.1	51.1
0°-60°	7265.8	86.4
0°-90°	8409.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8409.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3435	
5°	3419	325
15°	3282	926
25°	3027	1394
35°	2645	1652
45°	2140	1644
55°	1478	1325
65°	805	802
75°	270	298
85°	36	44
90°	0	



TEST NUMBER: P204836

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBSCMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3434.6
2.5°	3434.6
5°	3419.4
7.5°	3409.1
10°	3378.6
12.5°	3327.6
15°	3281.8
17.5°	3230.8
20°	3169.6
22.5°	3108.5
25°	3027.0
27.5°	2940.4
30°	2843.5
32.5°	2751.8
35°	2644.8
37.5°	2532.6
40°	2400.1
42.5°	2272.8
45°	2140.2
47.5°	1992.5
50°	1829.4
52.5°	1661.2
55°	1477.8
57.5°	1314.8
60°	1131.2
62.5°	968.2
65°	805.1
67.5°	652.2
70°	509.6
72.5°	382.2
75°	270.1
77.5°	173.2
80°	101.9
82.5°	61.1
85°	35.6
87.5°	15.2
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)