

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203186

Luminaire Tested: **LE_6B60D010R EC6B60708035 6LBWMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203186
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60708035 6LBWMW1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7236.6 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.13 / 1.13 / 1.15
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203186

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBWMW1

Luminous Intensity Polar Plot

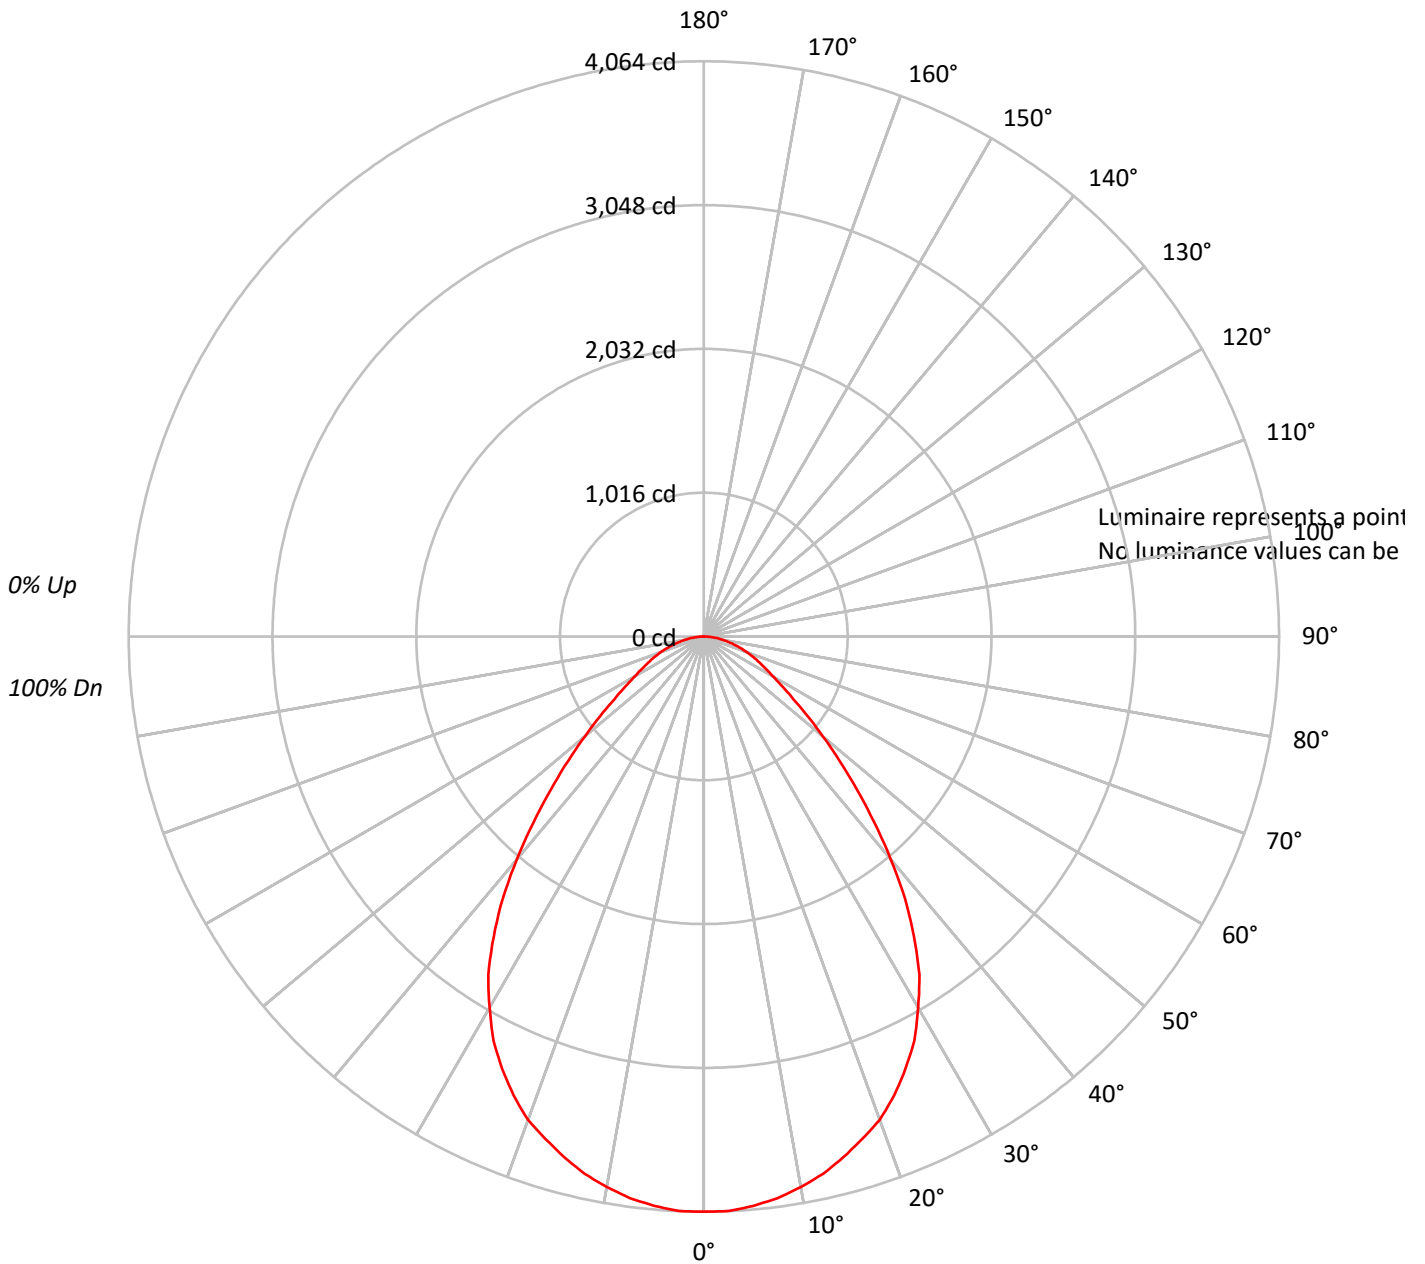



TEST NUMBER: P203186

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBWMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	100	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	103	96	90	86	100	94	89	85	91	86	83	88	84	81	85	82	79	77			
3	95	86	80	74	93	85	79	74	82	77	72	80	75	71	77	73	70	68			
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60			
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	54			
6	77	65	57	52	75	64	57	52	63	56	51	61	55	51	60	54	50	49			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			
8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40			
9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37			
10	60	48	40	36	58	47	40	36	46	40	36	45	40	35	45	39	35	34			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203186

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBWMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	382.7	5.3
10°-20°	1073.3	14.8
20°-30°	1546.4	21.4
30°-40°	1605.6	22.2
40°-50°	1187.0	16.4
50°-60°	709.0	9.8
60°-70°	430.9	6.0
70°-80°	236.0	3.3
80°-90°	65.6	0.9
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3002.4	41.5
0°-40°	4608.0	63.7
0°-60°	6504.1	89.9
0°-90°	7236.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7236.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4064	
5°	4038	383
15°	3809	1073
25°	3370	1546
35°	2589	1606
45°	1527	1187
55°	772	709
65°	430	431
75°	219	236
85°	53	66
90°	0	



TEST NUMBER: P203186

CATALOG NUMBER: LE_6B60D010R EC6B60708035 6LBWMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4063.9
2.5°	4063.9
5°	4037.5
7.5°	4002.5
10°	3949.8
12.5°	3888.4
15°	3809.4
17.5°	3721.6
20°	3633.8
22.5°	3510.9
25°	3370.5
27.5°	3221.2
30°	3028.1
32.5°	2835.0
35°	2589.2
37.5°	2334.8
40°	2053.9
42.5°	1781.8
45°	1527.2
47.5°	1299.0
50°	1097.1
52.5°	921.6
55°	772.4
57.5°	658.2
60°	561.8
62.5°	491.5
65°	430.1
67.5°	377.4
70°	324.8
72.5°	272.1
75°	219.4
77.5°	175.5
80°	131.6
82.5°	96.5
85°	52.6
87.5°	26.4
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)