

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204945

Luminaire Tested: **LE_6B60D010R EC6B60709035 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204945
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709035 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6001.3 lumens
Efficiency: N/A
Efficacy: 96.0 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204945

CATALOG NUMBER: LE_6B60D010R EC6B60709035 6LBSCMB1

Luminous Intensity Polar Plot

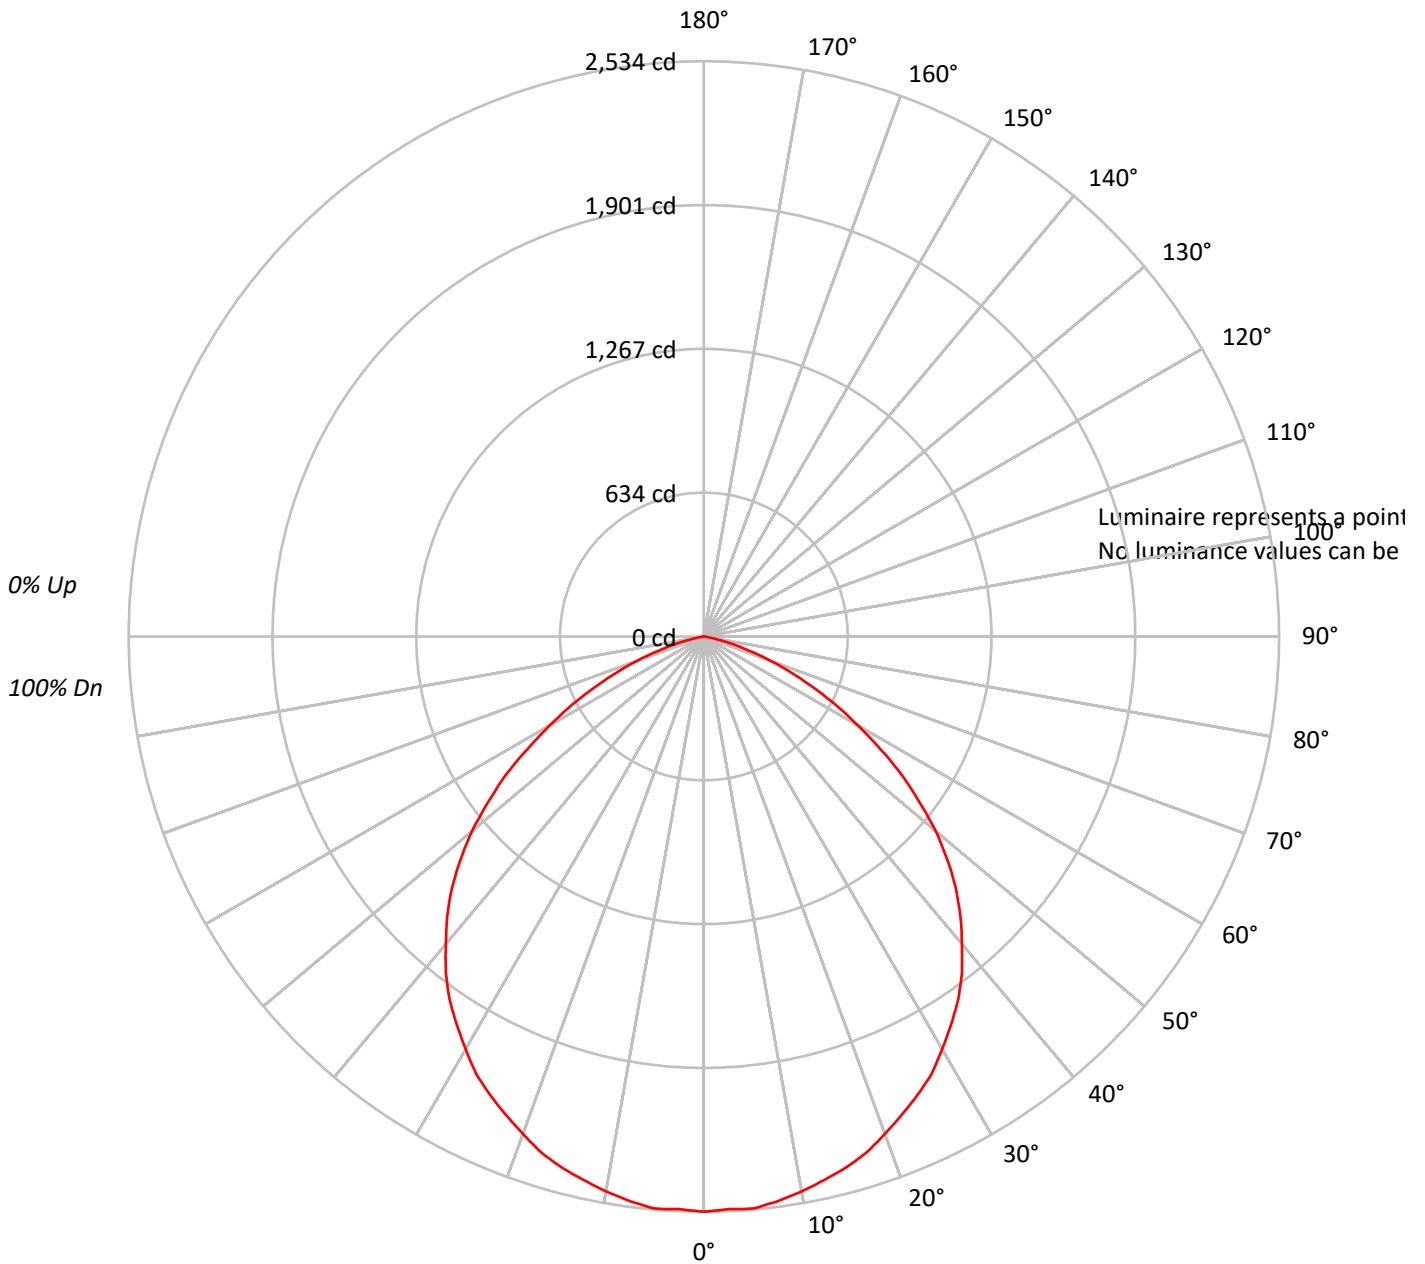



TEST NUMBER: P204945

CATALOG NUMBER: LE_6B60D010R EC6B60709035 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88				88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75				75
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65				65
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56				56
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49				49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43				43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39				39
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35				35
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31				31
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28				28

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204945

CATALOG NUMBER: LE_6B60D010R EC6B60709035 6LBSCMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	239.7	4.0
10°-20°	682.8	11.4
20°-30°	1026.5	17.1
30°-40°	1218.0	20.3
40°-50°	1205.3	20.1
50°-60°	946.8	15.8
60°-70°	530.8	8.8
70°-80°	149.1	2.5
80°-90°	2.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1949.0	32.5
0°-40°	3167.0	52.8
0°-60°	5319.1	88.6
0°-90°	6001.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6001.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2534	
5°	2530	240
15°	2422	683
25°	2229	1027
35°	1953	1218
45°	1570	1205
55°	1067	947
65°	529	531
75°	129	149
85°	0	2
90°	0	



TEST NUMBER: P204945

CATALOG NUMBER: LE_6B60D010R EC6B60709035 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	2534.1
2.5°	2525.5
5°	2529.8
7.5°	2508.2
10°	2482.5
12.5°	2452.4
15°	2422.2
17.5°	2383.5
20°	2331.9
22.5°	2280.2
25°	2228.6
27.5°	2172.8
30°	2099.5
32.5°	2026.4
35°	1953.2
37.5°	1867.2
40°	1768.2
42.5°	1673.6
45°	1570.4
47.5°	1454.2
50°	1333.8
52.5°	1196.0
55°	1067.0
57.5°	920.8
60°	783.0
62.5°	658.2
65°	529.2
67.5°	417.4
70°	309.8
72.5°	210.9
75°	129.1
77.5°	64.5
80°	17.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)