

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204740

Luminaire Tested: **LE\_6B60D010R EC6B60709040 6LBPSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204740  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B60D010R EC6B60709040 6LBPSMW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH PLASTIC MATTE WHITE TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7035.3 lumens  
Efficiency: N/A  
Efficacy: 112.6 lumens/watt  
Spacing Criteria (0/90/45): 1.24 / 1.24 / 1.34  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 62.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204740

CATALOG NUMBER: LE\_6B60D010R EC6B60709040 6LBPSMW1

### Luminous Intensity Polar Plot

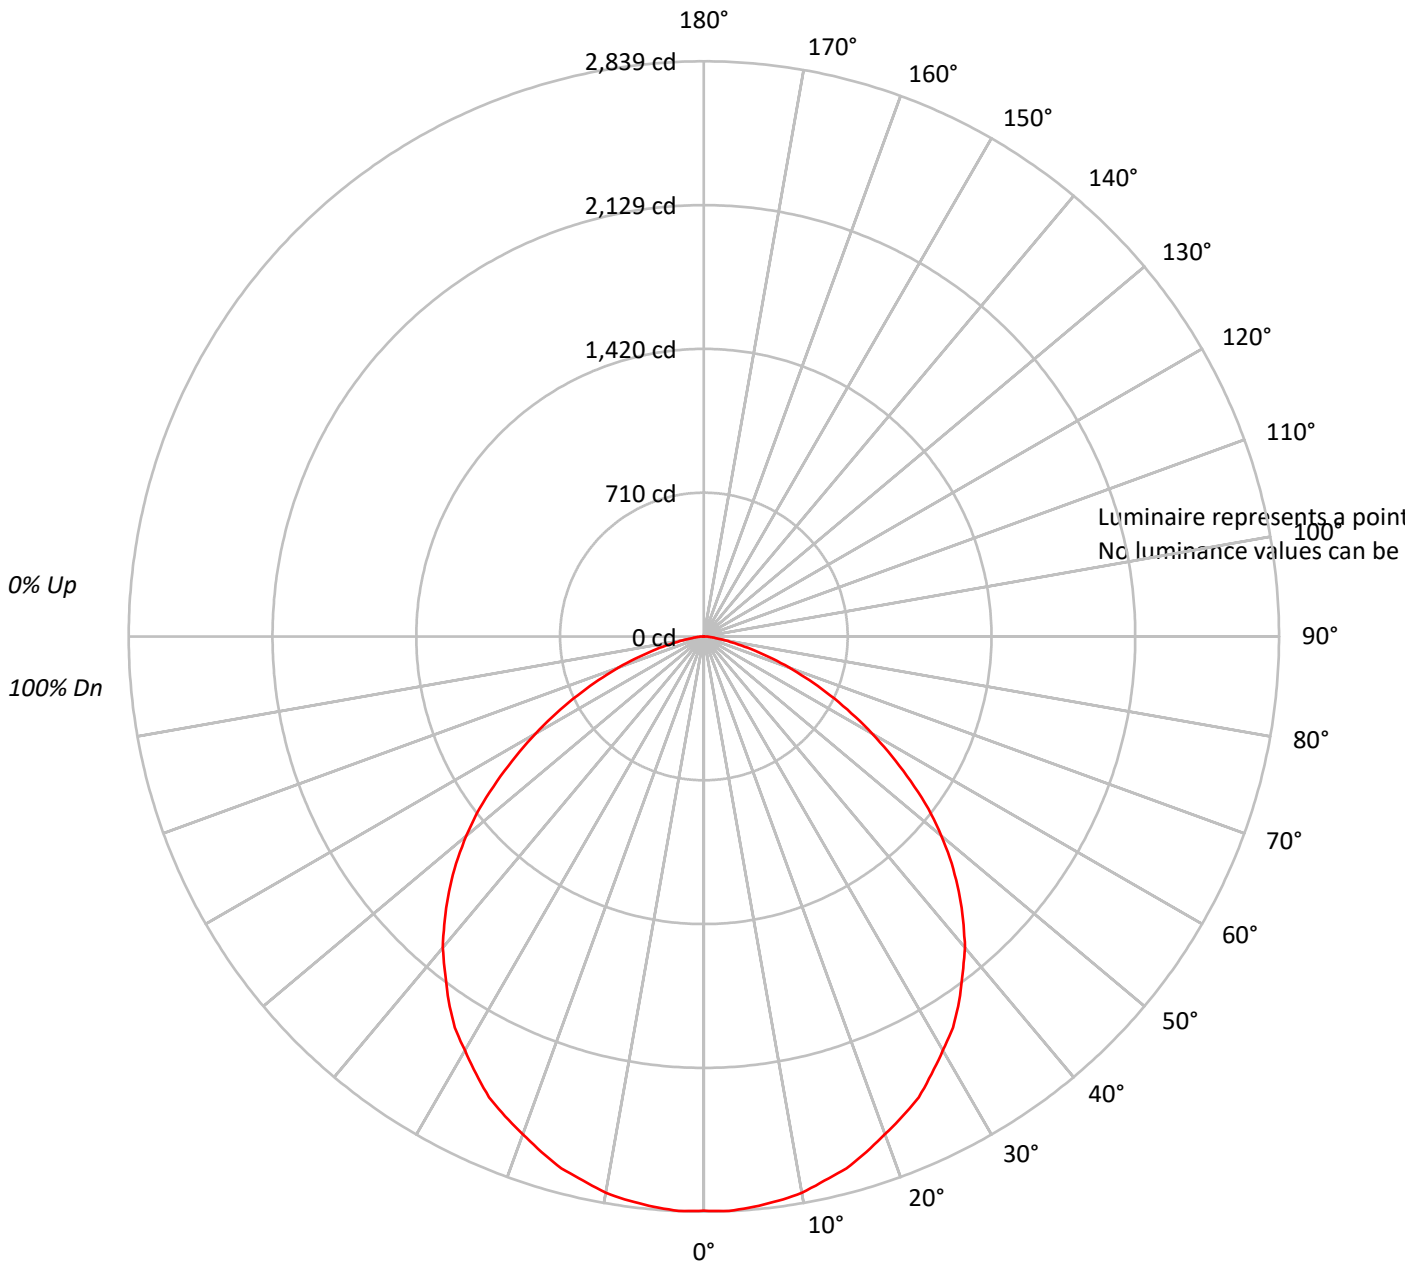



TEST NUMBER: P204740

CATALOG NUMBER: LE\_6B60D010R EC6B60709040 6LBPSMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	110	106	102	99	107	104	100	97	99	97	94	96	93	91	92	90	88	86				86
2	101	93	87	82	98	92	86	81	88	83	79	85	81	77	82	79	76	74				74
3	93	83	75	69	90	81	74	69	78	72	67	76	70	66	73	69	65	63				63
4	85	74	65	59	83	72	65	59	70	63	58	68	62	57	66	61	56	54				54
5	78	66	58	51	76	65	57	51	63	56	51	61	55	50	59	54	49	47				47
6	73	60	51	45	71	59	51	45	57	50	44	55	49	44	54	48	44	42				42
7	67	54	46	40	66	54	46	40	52	45	40	51	44	39	49	43	39	37				37
8	63	50	41	36	61	49	41	36	48	41	35	46	40	35	45	39	35	33				33
9	59	46	38	32	57	45	37	32	44	37	32	43	36	32	42	36	32	30				30
10	55	42	34	29	54	42	34	29	41	34	29	40	33	29	39	33	29	27				27

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204740

CATALOG NUMBER: LE\_6B60D010R EC6B60709040 6LBPSMW1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	268.6	3.8
10°-20°	765.6	10.9
20°-30°	1153.0	16.4
30°-40°	1371.9	19.5
40°-50°	1369.4	19.5
50°-60°	1113.7	15.8
60°-70°	685.2	9.7
70°-80°	265.4	3.8
80°-90°	42.5	0.6
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2187.1	31.1
0°-40°	3559.0	50.6
0°-60°	6042.2	85.9
0°-90°	7035.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7035.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2834	
5°	2826	269
15°	2718	766
25°	2509	1153
35°	2197	1372
45°	1780	1369
55°	1246	1114
65°	688	685
75°	242	265
85°	33	43
90°	0	



TEST NUMBER: P204740

CATALOG NUMBER: LE\_6B60D010R EC6B60709040 6LBPSMW1

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2834.5
2.5°	2838.6
5°	2826.1
7.5°	2809.5
10°	2788.6
12.5°	2751.1
15°	2717.8
17.5°	2667.8
20°	2613.6
22.5°	2563.5
25°	2509.4
27.5°	2434.4
30°	2359.2
32.5°	2288.5
35°	2196.8
37.5°	2096.8
40°	2005.0
42.5°	1892.5
45°	1779.9
47.5°	1659.0
50°	1529.8
52.5°	1396.4
55°	1246.4
57.5°	1100.5
60°	958.8
62.5°	821.1
65°	687.8
67.5°	562.8
70°	446.0
72.5°	337.6
75°	241.8
77.5°	158.4
80°	95.9
82.5°	58.4
85°	33.4
87.5°	16.6
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)