

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204941

Luminaire Tested: **LE_6B60D010R EC6B60708050 6LBCSMB1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P204941
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60708050 6LBCSMB1
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT
SHALLOW DISTRIBUTION WITH CAST MATTE BLACK TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7172.1 lumens
Efficiency: N/A
Efficacy: 114.8 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P204941

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBSCMB1

Luminous Intensity Polar Plot

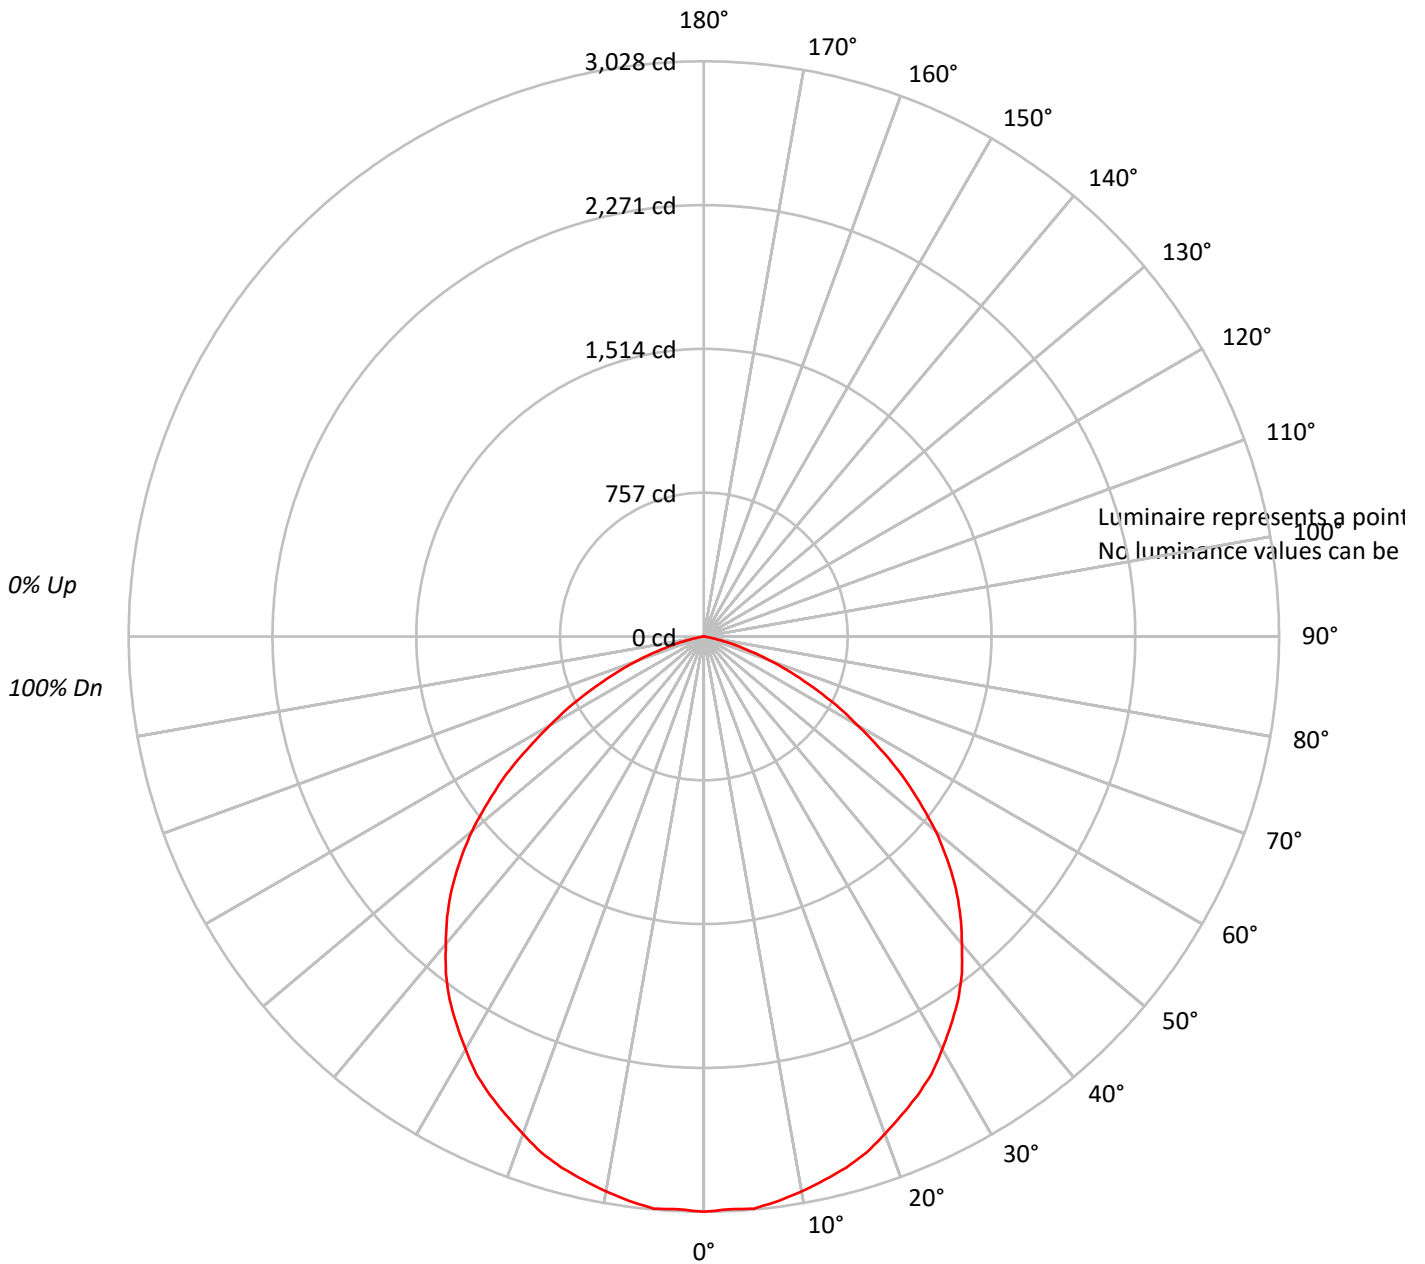



TEST NUMBER: P204941

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBCSMB1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	111	107	103	100	108	104	101	98	100	98	95	96	94	92	93	91	90	88				88
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75				75
3	93	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65				65
4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56				56
5	79	67	59	53	77	66	59	53	64	57	52	62	56	52	61	55	51	49				49
6	74	61	53	47	72	60	52	46	58	51	46	57	50	46	55	50	45	43				43
7	68	55	47	41	67	55	47	41	53	46	41	52	45	41	50	45	40	39				39
8	64	51	43	37	62	50	42	37	49	42	37	48	41	37	46	41	36	35				35
9	60	47	39	33	58	46	39	33	45	38	33	44	38	33	43	37	33	31				31
10	56	43	35	30	55	43	35	30	42	35	30	41	34	30	40	34	30	28				28

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P204941

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBSCMB1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	286.4	4.0
10°-20°	816.1	11.4
20°-30°	1226.8	17.1
30°-40°	1455.6	20.3
40°-50°	1440.5	20.1
50°-60°	1131.5	15.8
60°-70°	634.4	8.8
70°-80°	178.1	2.5
80°-90°	2.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2329.3	32.5
0°-40°	3784.9	52.8
0°-60°	6356.8	88.6
0°-90°	7172.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7172.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3028	
5°	3023	286
15°	2895	816
25°	2663	1227
35°	2334	1456
45°	1877	1440
55°	1275	1131
65°	632	634
75°	154	178
85°	0	3
90°	0	



TEST NUMBER: P204941

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBCSMB1

CANDELA DISTRIBUTION (FULL):

	0°
0°	3028.5
2.5°	3018.1
5°	3023.4
7.5°	2997.6
10°	2966.8
12.5°	2930.8
15°	2894.8
17.5°	2848.5
20°	2786.8
22.5°	2725.1
25°	2663.4
27.5°	2596.5
30°	2509.1
32.5°	2421.8
35°	2334.4
37.5°	2231.5
40°	2113.2
42.5°	2000.1
45°	1876.8
47.5°	1737.9
50°	1593.9
52.5°	1429.4
55°	1275.1
57.5°	1100.4
60°	935.8
62.5°	786.6
65°	632.4
67.5°	498.8
70°	370.2
72.5°	252.0
75°	154.2
77.5°	77.1
80°	20.6
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)