

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P204838

Luminaire Tested: **LE\_6B60D010R EC6B60708050 6LBCSMW1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P204838  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LE\_6B60D010R EC6B60708050 6LBCSMW1  
Description: PORTFOLIO 6 INCH SHALLOW RECESSED DOWNLIGHT  
SHALLOW DISTRIBUTION WITH CAST MATTE WHITE TRIM  
SINGLE DRIVER D010TE  
Light Source: HIGH LUMEN LED  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8488.3 lumens  
Efficiency: N/A  
Efficacy: 135.8 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Point Source (0' x 0' x 0')  
CIE Type: Direct


Input Watts (W): 62.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P204838

CATALOG NUMBER: LE\_6B60D010R EC6B60708050 6LBSCMW1

### Luminous Intensity Polar Plot

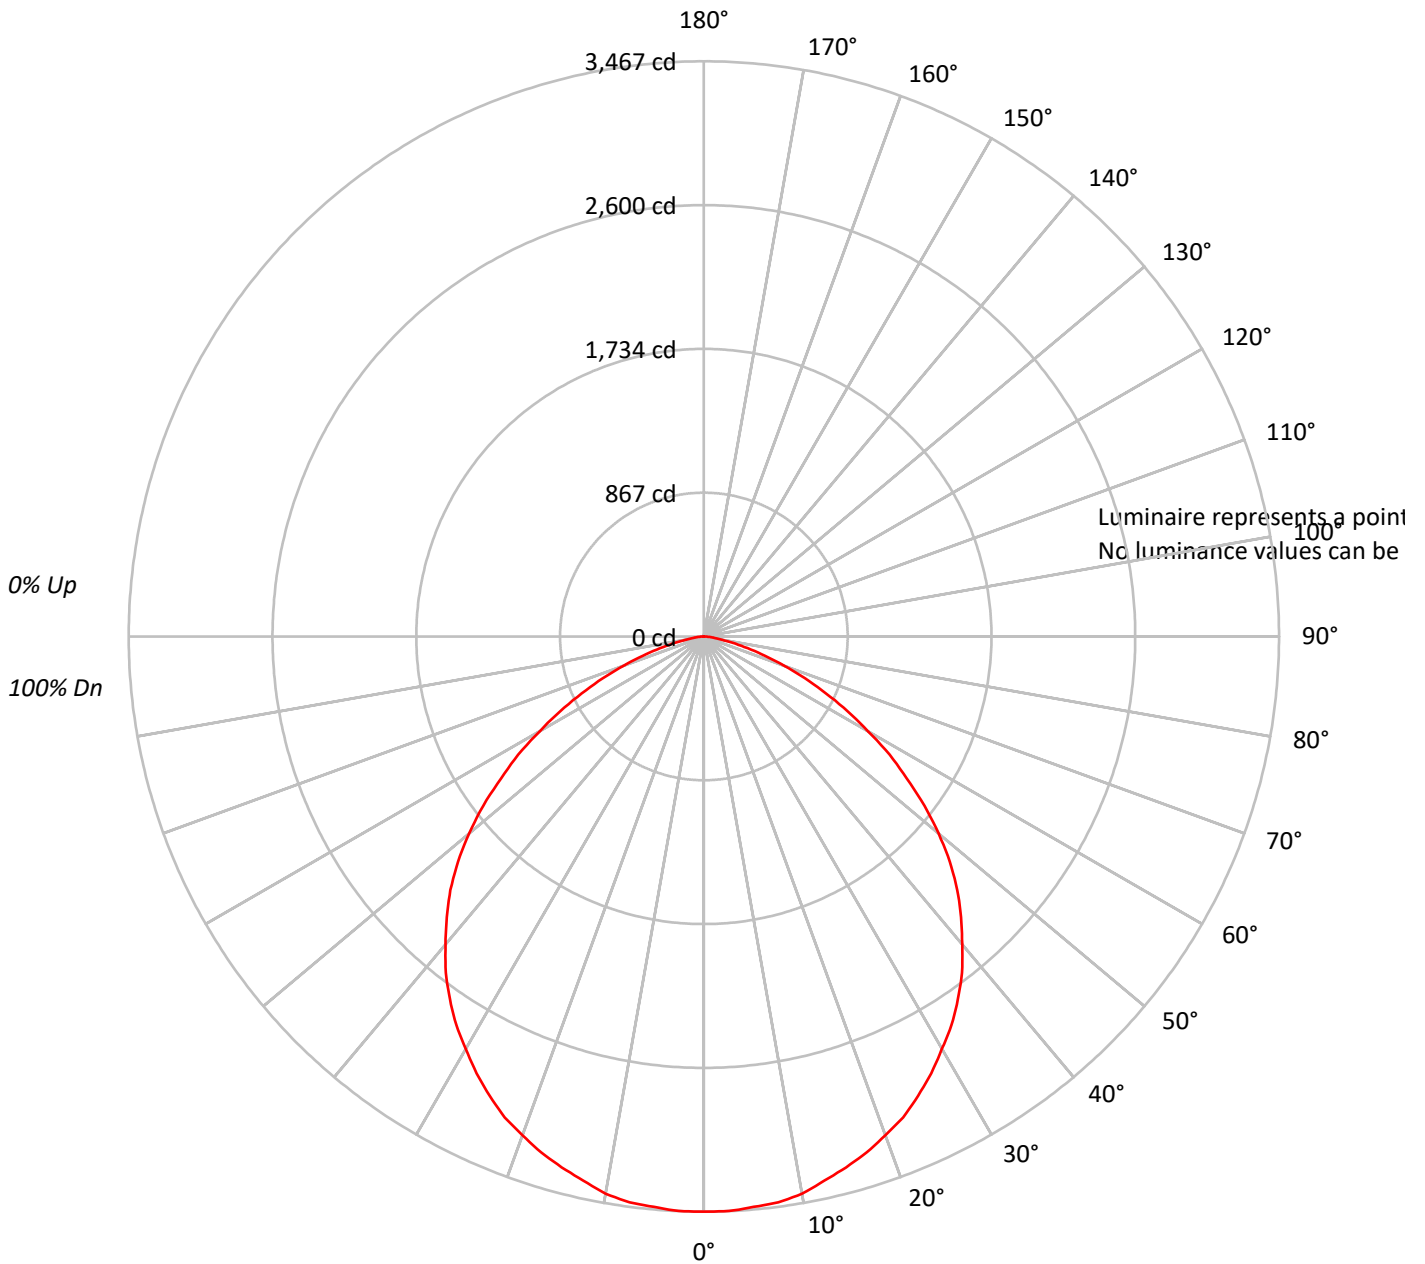



TEST NUMBER: P204838

CATALOG NUMBER: LE\_6B60D010R EC6B60708050 6LBSCMW1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 110 | 106 | 102 | 99  | 108 | 104 | 100 | 97  | 100 | 97  | 94  | 96  | 93  | 91  | 92  | 90  | 89  | 87  |    |    | 87  |
| 2   | 101 | 94  | 87  | 82  | 99  | 92  | 86  | 81  | 88  | 84  | 79  | 85  | 81  | 78  | 82  | 79  | 76  | 74  |    |    | 74  |
| 3   | 93  | 83  | 75  | 70  | 90  | 81  | 74  | 69  | 79  | 73  | 68  | 76  | 71  | 67  | 73  | 69  | 65  | 63  |    |    | 63  |
| 4   | 85  | 74  | 66  | 60  | 83  | 73  | 65  | 59  | 70  | 64  | 58  | 68  | 62  | 58  | 66  | 61  | 57  | 55  |    |    | 55  |
| 5   | 79  | 66  | 58  | 52  | 77  | 65  | 57  | 51  | 63  | 56  | 51  | 61  | 55  | 50  | 60  | 54  | 50  | 48  |    |    | 48  |
| 6   | 73  | 60  | 52  | 45  | 71  | 59  | 51  | 45  | 57  | 50  | 45  | 56  | 49  | 44  | 54  | 49  | 44  | 42  |    |    | 42  |
| 7   | 68  | 55  | 46  | 40  | 66  | 54  | 46  | 40  | 52  | 45  | 40  | 51  | 44  | 40  | 50  | 44  | 39  | 37  |    |    | 37  |
| 8   | 63  | 50  | 42  | 36  | 61  | 49  | 41  | 36  | 48  | 41  | 36  | 47  | 40  | 36  | 46  | 40  | 35  | 33  |    |    | 33  |
| 9   | 59  | 46  | 38  | 33  | 57  | 45  | 38  | 32  | 44  | 37  | 32  | 43  | 37  | 32  | 42  | 36  | 32  | 30  |    |    | 30  |
| 10  | 55  | 42  | 35  | 30  | 54  | 42  | 34  | 30  | 41  | 34  | 29  | 40  | 34  | 29  | 39  | 33  | 29  | 27  |    |    | 27  |

**AVERAGE LUMINANCE (cd/sqm):**





TEST NUMBER: P204838

CATALOG NUMBER: LE\_6B60D010R EC6B60708050 6LBSCMW1

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 328.5  | 3.9       |
| 10°-20°   | 935.1  | 11.0      |
| 20°-30°   | 1406.7 | 16.6      |
| 30°-40°   | 1667.1 | 19.6      |
| 40°-50°   | 1659.1 | 19.5      |
| 50°-60°   | 1337.4 | 15.8      |
| 60°-70°   | 809.1  | 9.5       |
| 70°-80°   | 300.4  | 3.5       |
| 80°-90°   | 44.8   | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 2670.3 | 31.5      |
| 0°-40°    | 4337.5 | 51.1      |
| 0°-60°    | 7334.0 | 86.4      |
| 0°-90°    | 8488.3 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 8488.3 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3467 |      |
| 5°  | 3451 | 328  |
| 15° | 3312 | 935  |
| 25° | 3055 | 1407 |
| 35° | 2670 | 1667 |
| 45° | 2160 | 1659 |
| 55° | 1492 | 1337 |
| 65° | 813  | 809  |
| 75° | 273  | 300  |
| 85° | 36   | 45   |
| 90° | 0    |      |



TEST NUMBER: P204838

CATALOG NUMBER: LE\_6B60D010R EC6B60708050 6LBSCMW1

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 3466.9 |
| 2.5°  | 3466.9 |
| 5°    | 3451.4 |
| 7.5°  | 3441.1 |
| 10°   | 3410.2 |
| 12.5° | 3358.9 |
| 15°   | 3312.5 |
| 17.5° | 3261.1 |
| 20°   | 3199.4 |
| 22.5° | 3137.6 |
| 25°   | 3055.4 |
| 27.5° | 2967.9 |
| 30°   | 2870.2 |
| 32.5° | 2777.6 |
| 35°   | 2669.6 |
| 37.5° | 2556.4 |
| 40°   | 2422.8 |
| 42.5° | 2294.1 |
| 45°   | 2160.4 |
| 47.5° | 2011.2 |
| 50°   | 1846.6 |
| 52.5° | 1676.9 |
| 55°   | 1491.6 |
| 57.5° | 1327.1 |
| 60°   | 1141.9 |
| 62.5° | 977.2  |
| 65°   | 812.8  |
| 67.5° | 658.4  |
| 70°   | 514.4  |
| 72.5° | 385.8  |
| 75°   | 272.6  |
| 77.5° | 174.9  |
| 80°   | 102.9  |
| 82.5° | 61.8   |
| 85°   | 36.0   |
| 87.5° | 15.4   |
| 90°   | 0.0    |



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







(END OF REPORT)