

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P203600

Luminaire Tested: **LE_6B60D010R EC6B60708050 6LBMMW1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P203600
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60708050 6LBMMW1
Description: PORTFOLIO 6 INCH 50 DEGREE CUTOFF RECESSED DOWNLIGHT
MEDIUM DISTRIBUTION WITH MATTE WHITE TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6197.8 lumens
Efficiency: N/A
Efficacy: 99.2 lumens/watt
Spacing Criteria (0/90/45): 1 / 1 / 0.97
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P203600

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBMMW1

Luminous Intensity Polar Plot

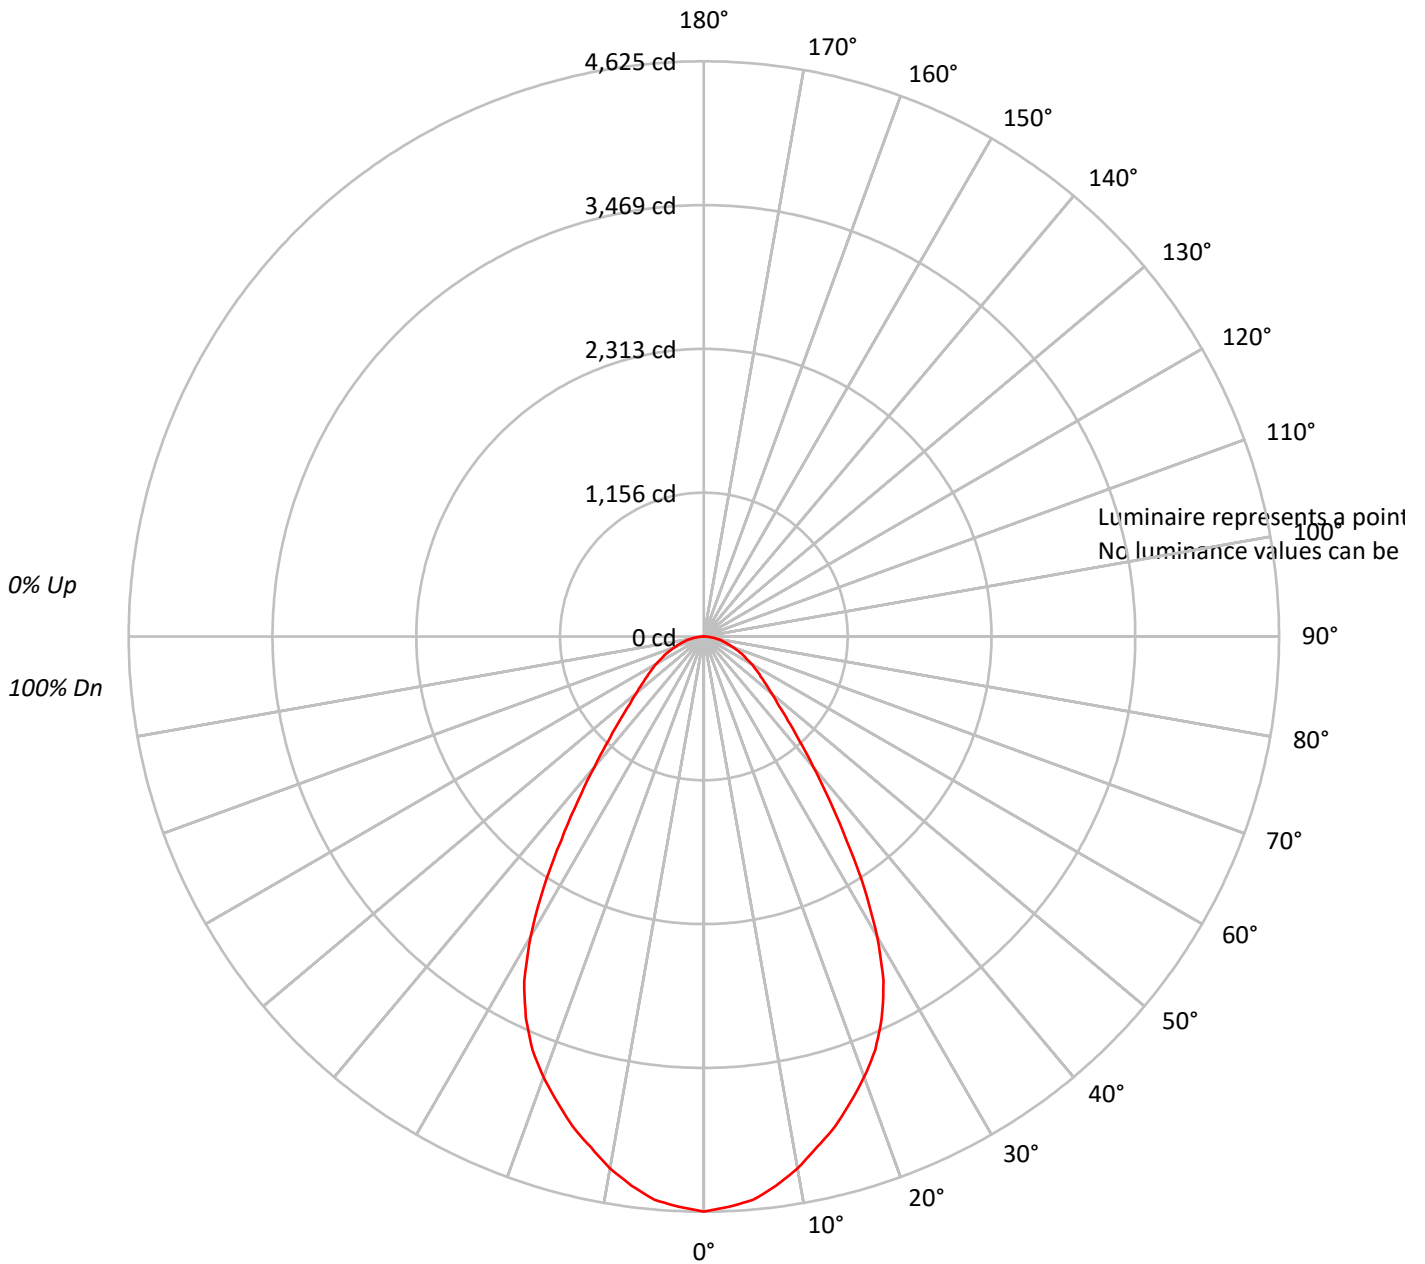



TEST NUMBER: P203600

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBMMW1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	108	104	101	109	105	103	100	101	99	97	98	96	94	94	92	91	89			
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			
3	97	88	82	77	95	87	81	76	84	79	75	82	77	74	79	76	73	71			
4	90	81	74	68	88	80	73	68	77	72	67	75	70	66	73	69	65	64			
5	85	74	67	61	83	73	66	61	71	65	61	69	64	60	68	63	59	58			
6	79	68	61	56	78	68	61	56	66	60	55	64	59	55	63	58	54	53			
7	75	63	56	51	73	63	56	51	61	55	50	60	54	50	59	54	50	48			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41			
10	63	51	45	40	62	51	44	40	50	44	40	49	44	40	48	43	40	38			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P203600

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBMMW1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	427.2	6.9
10°-20°	1144.3	18.5
20°-30°	1536.5	24.8
30°-40°	1260.4	20.3
40°-50°	756.9	12.2
50°-60°	502.9	8.1
60°-70°	337.1	5.4
70°-80°	181.5	2.9
80°-90°	51.2	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3108.0	50.1
0°-40°	4368.3	70.5
0°-60°	5628.1	90.8
0°-90°	6197.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6197.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4625	
5°	4548	427
15°	4078	1144
25°	3385	1536
35°	2000	1260
45°	957	757
55°	556	503
65°	342	337
75°	171	181
85°	43	51
90°	0	



TEST NUMBER: P203600

CATALOG NUMBER: LE_6B60D010R EC6B60708050 6LBMMW1

CANDELA DISTRIBUTION (FULL):

	0°
0°	4624.6
2.5°	4590.5
5°	4547.8
7.5°	4453.6
10°	4342.5
12.5°	4205.8
15°	4077.5
17.5°	3923.6
20°	3769.8
22.5°	3598.9
25°	3385.1
27.5°	3128.6
30°	2786.8
32.5°	2402.1
35°	2000.2
37.5°	1658.4
40°	1367.8
42.5°	1136.9
45°	957.4
47.5°	812.1
50°	709.5
52.5°	624.0
55°	555.6
57.5°	495.8
60°	444.5
62.5°	384.6
65°	341.9
67.5°	290.6
70°	247.9
72.5°	205.1
75°	171.0
77.5°	136.8
80°	102.6
82.5°	76.9
85°	42.8
87.5°	17.1
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)