

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P202782

Luminaire Tested: **LE_6B60D010R EC6B60709050 6LBWH1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P202782
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P35319)
Test Lab: INNOVATION CENTER-P3
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LE_6B60D010R EC6B60709050 6LBWH1
Description: PORTFOLIO 6 INCH 60 DEGREE CUTOFF RECESSED DOWNLIGHT
WIDE DISTRIBUTION WITH SEMI-SPECULAR CLEAR TRIM
SINGLE DRIVER D010TE
Light Source: HIGH LUMEN LED
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5754.3 lumens
Efficiency: N/A
Efficacy: 92.1 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Point Source (0' x 0' x 0')
CIE Type: Direct


Input Watts (W): 62.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P202782

CATALOG NUMBER: LE_6B60D010R EC6B60709050 6LBWH1

Luminous Intensity Polar Plot

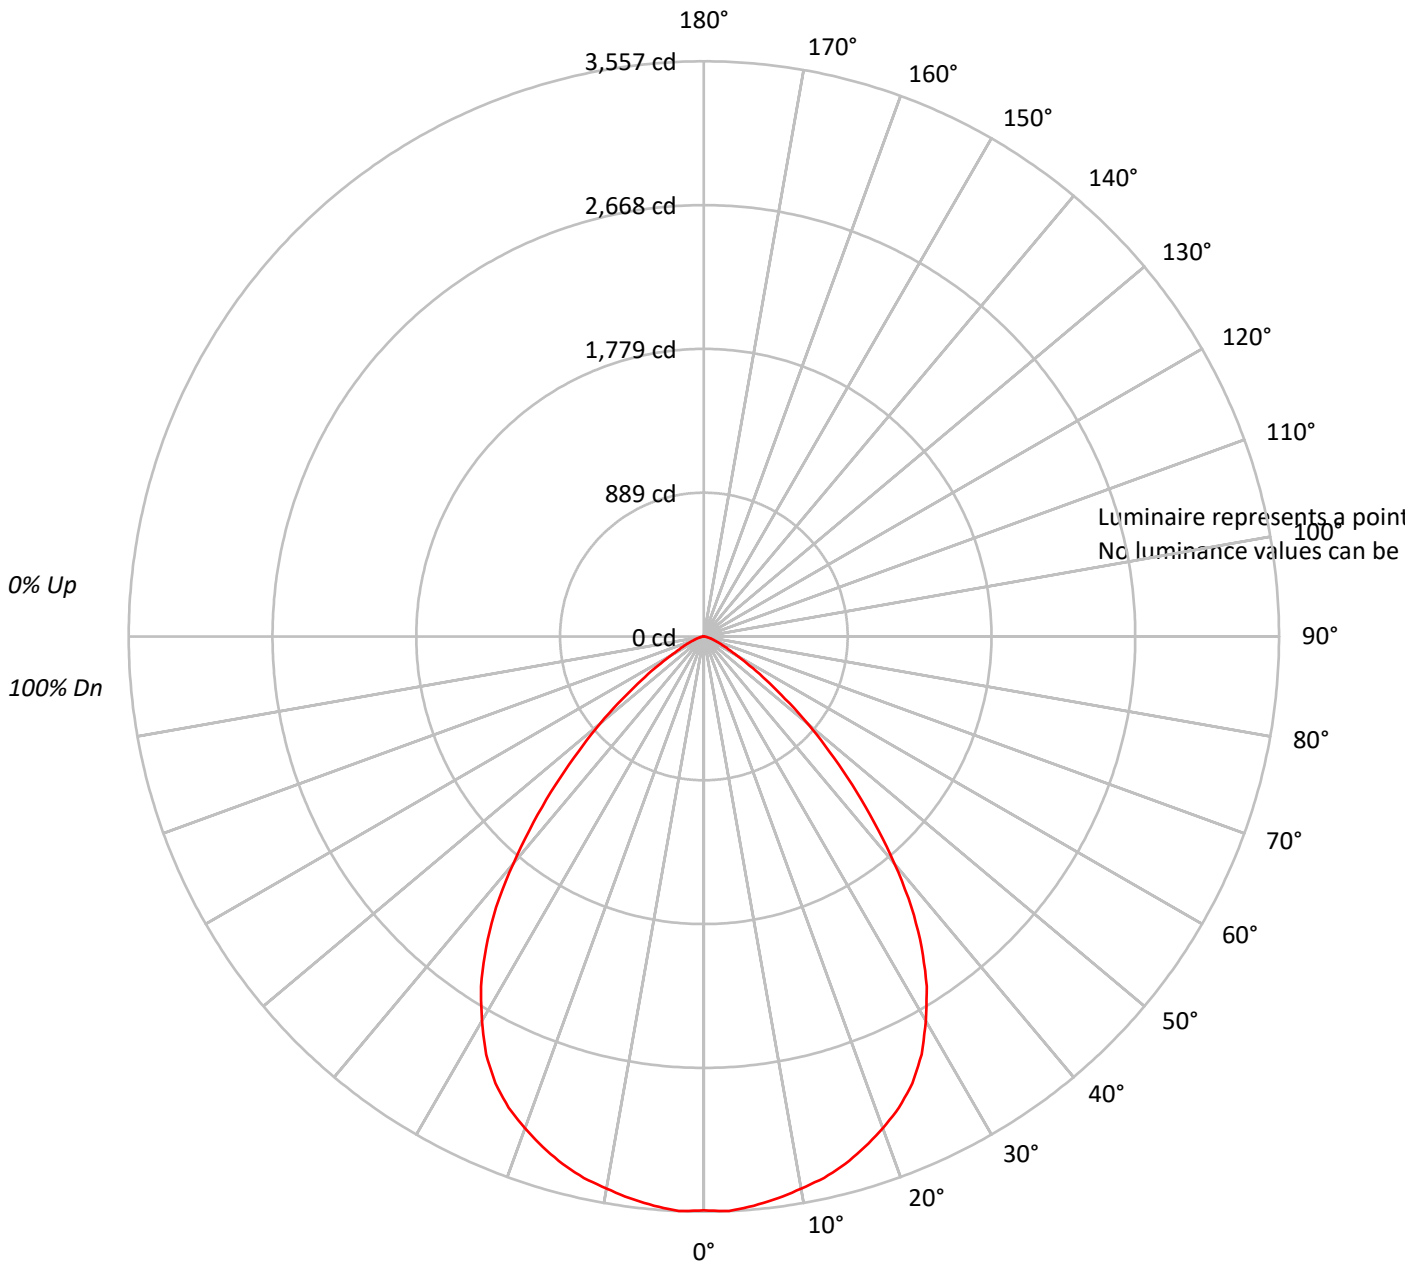



TEST NUMBER: P202782

CATALOG NUMBER: LE_6B60D010R EC6B60709050 6LBWH1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			

AVERAGE LUMINANCE (cd/sqm):





TEST NUMBER: P202782

CATALOG NUMBER: LE_6B60D010R EC6B60709050 6LBWH1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	335.2	5.8
10°-20°	951.2	16.5
20°-30°	1394.6	24.2
30°-40°	1451.5	25.2
40°-50°	1004.3	17.5
50°-60°	437.2	7.6
60°-70°	134.1	2.3
70°-80°	40.2	0.7
80°-90°	6.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2681.0	46.6
0°-40°	4132.5	71.8
0°-60°	5573.9	96.9
0°-90°	5754.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5754.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3549	
5°	3534	335
15°	3378	951
25°	3050	1395
35°	2349	1451
45°	1297	1004
55°	470	437
65°	127	134
75°	37	40
85°	8	6
90°	0	



TEST NUMBER: P202782

CATALOG NUMBER: LE_6B60D010R EC6B60709050 6LBWH1

CANDELA DISTRIBUTION (FULL):

0°	
0°	3549.1
2.5°	3556.6
5°	3534.2
7.5°	3504.4
10°	3467.1
12.5°	3429.9
15°	3377.6
17.5°	3310.5
20°	3236.0
22.5°	3154.0
25°	3049.6
27.5°	2915.4
30°	2743.9
32.5°	2564.9
35°	2348.8
37.5°	2110.1
40°	1834.2
42.5°	1558.4
45°	1297.4
47.5°	1051.4
50°	835.1
52.5°	633.8
55°	469.8
57.5°	335.5
60°	231.1
62.5°	171.5
65°	126.8
67.5°	96.9
70°	67.1
72.5°	52.2
75°	37.2
77.5°	22.4
80°	14.9
82.5°	7.5
85°	7.5
87.5°	0.0
90°	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







(END OF REPORT)