

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844010

Luminaire Tested: **LD6C10DE010B2750 EU6C10B50 6LBWH**

Issue Date: 2/17/2023

Test Information

Test Method: LM-79-08
Report Number: P844010
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P202739)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C10DE010B2750 EU6C10B50 6LBWH
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1123.2 lumens
Efficiency: N/A
Efficacy: 84.5 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.16
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 13.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P844010

CATALOG NUMBER: LD6C10DE010B2750 EU6C10B50 6LBWH

Luminous Intensity Polar Plot

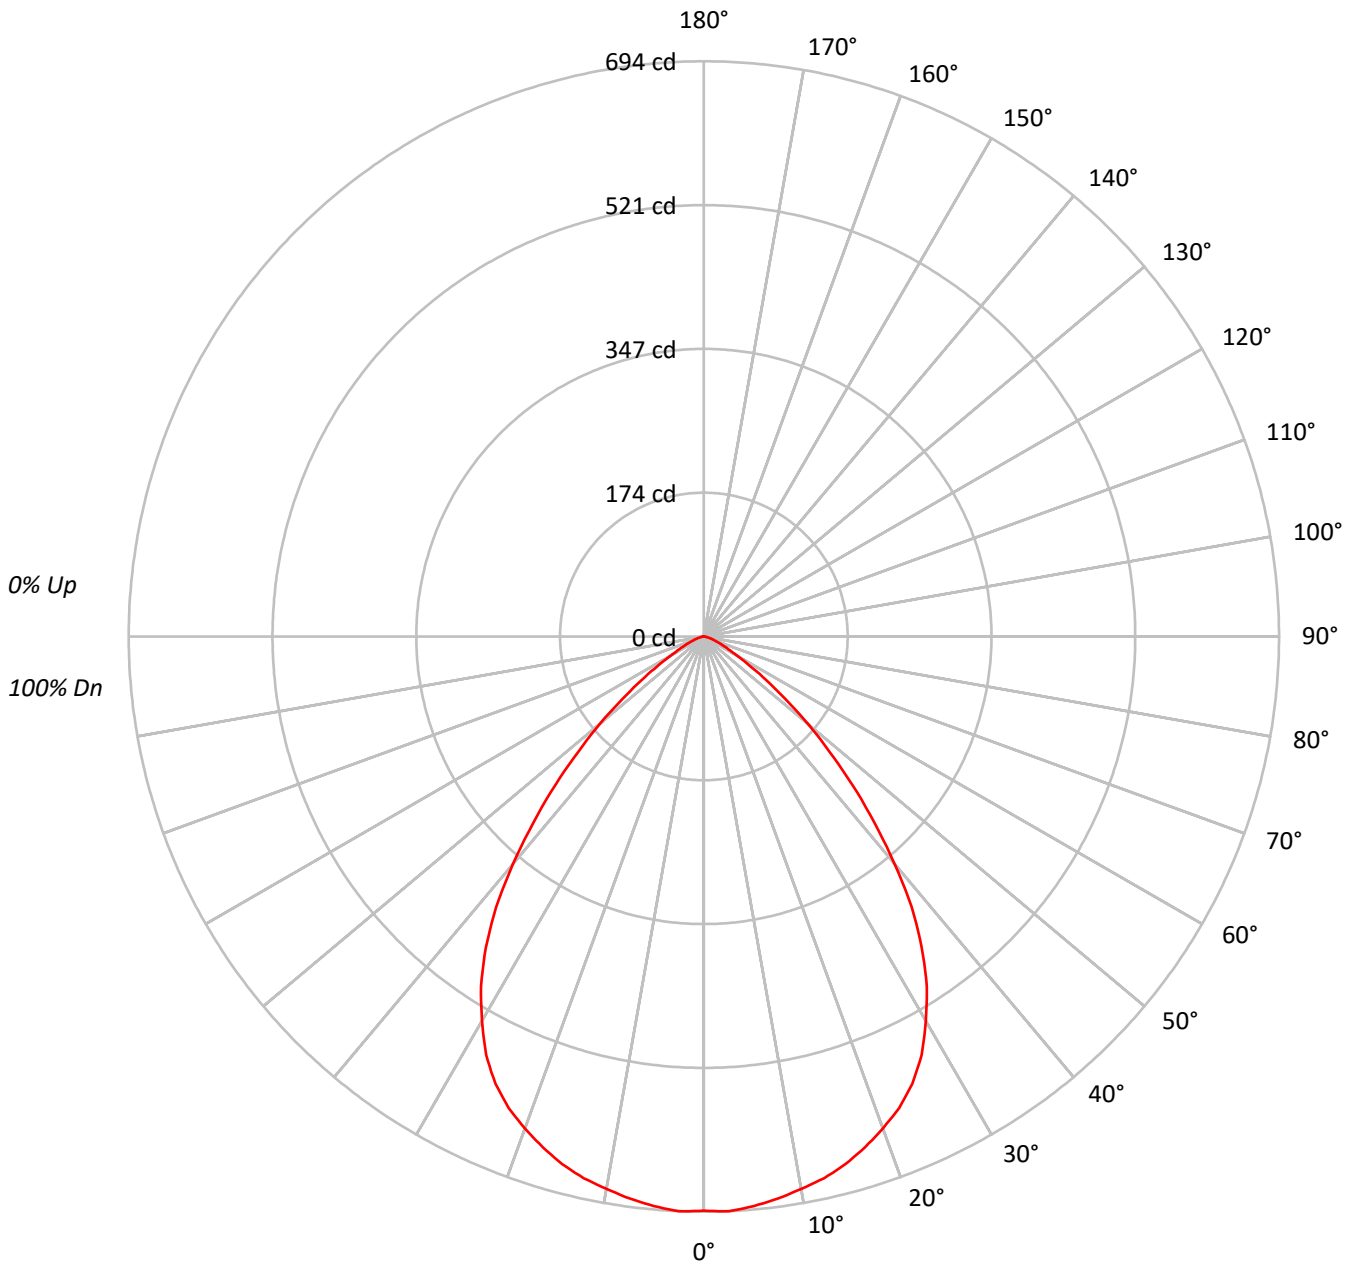



TEST NUMBER: P844010

CATALOG NUMBER: LD6C10DE010B2750 EU6C10B50 6LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	101	103	100	98	99	97	95	95	94	93	91			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81			
3	98	90	84	79	96	89	83	78	86	81	77	83	79	76	81	78	75	73			
4	92	82	75	70	90	81	75	70	79	73	69	77	72	68	75	71	67	65			
5	86	75	68	63	84	74	68	63	72	66	62	71	65	61	69	64	61	59			
6	80	69	62	57	78	68	61	56	67	61	56	65	60	56	64	59	55	53			
7	75	64	56	51	73	63	56	51	62	55	51	60	55	51	59	54	50	49			
8	70	59	52	47	69	58	51	47	57	51	46	56	50	46	55	50	46	44			
9	66	55	48	43	65	54	47	43	53	47	43	52	47	42	51	46	42	41			
10	62	51	44	40	61	50	44	39	50	43	39	49	43	39	48	43	39	38			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	37979
5°	37965
10°	37675
15°	37418
20°	36847
25°	36002
30°	33904
35°	30684
40°	25619
45°	19630
50°	13901
55°	8764
60°	4945
65°	3204
70°	2100
75°	1546
80°	947
85°	943



TEST NUMBER: P844010

CATALOG NUMBER: LD6C10DE010B2750 EU6C10B50 6LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.4	5.8
10°-20°	185.7	16.5
20°-30°	272.2	24.2
30°-40°	283.3	25.2
40°-50°	196.0	17.5
50°-60°	85.3	7.6
60°-70°	26.2	2.3
70°-80°	7.9	0.7
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	523.3	46.6
0°-40°	806.6	71.8
0°-60°	1088.0	96.9
0°-90°	1123.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1123.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	693	
5°	690	65
15°	659	186
25°	595	272
35°	458	283
45°	253	196
55°	92	85
65°	25	26
75°	7	8
85°	2	1
90°	0	



TEST NUMBER: P844010

CATALOG NUMBER: LD6C10DE010B2750 EU6C10B50 6LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	692.8
2.5°	694.2
5°	689.9
7.5°	684.1
10°	676.8
12.5°	669.5
15°	659.3
17.5°	646.2
20°	631.6
22.5°	615.6
25°	595.2
27.5°	569.1
30°	535.6
32.5°	500.7
35°	458.5
37.5°	411.9
40°	358.0
42.5°	304.2
45°	253.2
47.5°	205.2
50°	163.0
52.5°	123.7
55°	91.7
57.5°	65.5
60°	45.1
62.5°	33.5
65°	24.7
67.5°	18.9
70°	13.1
72.5°	10.2
75°	7.3
77.5°	4.3
80°	3.0
82.5°	1.5
85°	1.5
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)