

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844030

Luminaire Tested: **LD6C15DE010B2750 EU6C15B30 6LBCSMMS**

Issue Date: 5/7/2024



**Test Information**

Test Method: LM-79-08  
Report Number: P844030  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P204757)  
Test Lab: INNOVATION CENTER  
Issue Date: 5/7/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD6C15DE010B2750 EU6C15B30 6LBSCMMS  
Description:  
Light Source: -  
Ballast/Driver:

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1554.7 lumens  
Efficiency: N/A  
Efficacy: 91.5 lumens/watt  
Spacing Criteria (0/90/45): 1.23 / 1.23 / 1.33  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 17  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P844030

CATALOG NUMBER: LD6C15DE010B2750 EU6C15B30 6LBCSMMS

### Luminous Intensity Polar Plot

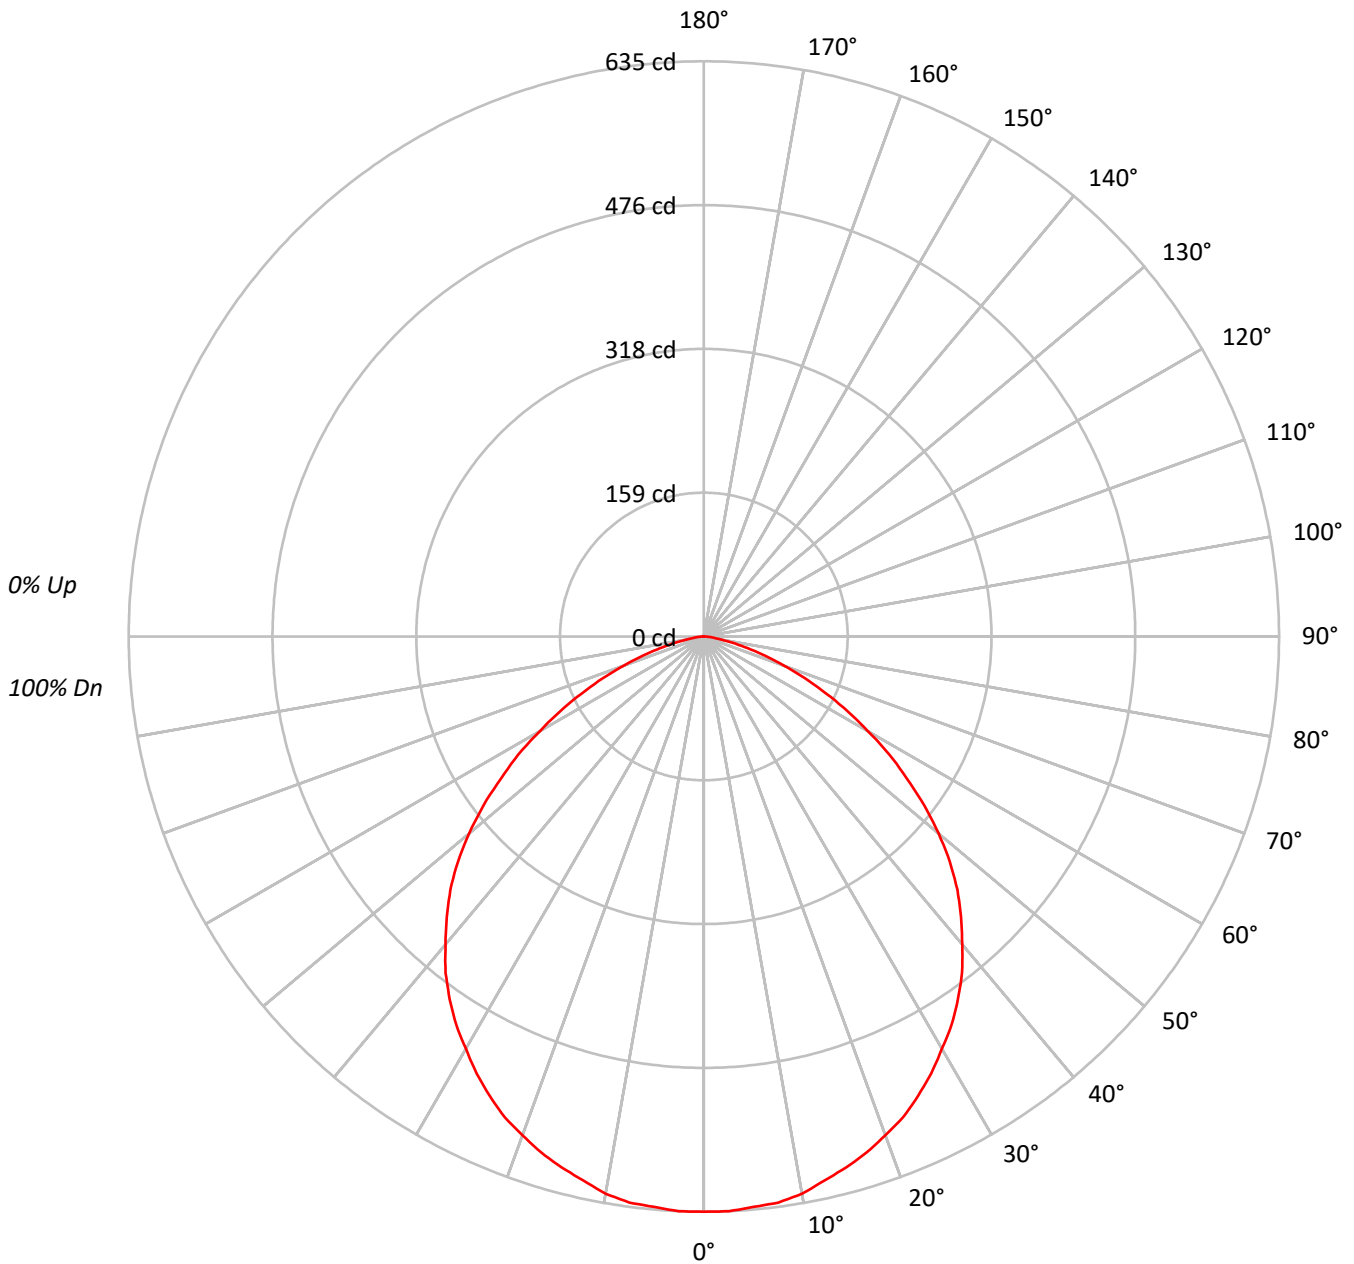



TEST NUMBER: P844030

CATALOG NUMBER: LD6C15DE010B2750 EU6C15B30 6LBCSMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 110 | 106 | 102 | 99  | 108 | 104 | 100 | 97  | 100 | 97  | 94  | 96  | 93  | 91  | 92  | 90  | 89  | 87  |    |    | 87  |
| 2   | 101 | 94  | 87  | 82  | 99  | 92  | 86  | 81  | 88  | 84  | 79  | 85  | 81  | 78  | 82  | 79  | 76  | 74  |    |    | 74  |
| 3   | 93  | 83  | 75  | 70  | 90  | 81  | 74  | 69  | 79  | 73  | 68  | 76  | 71  | 67  | 73  | 69  | 65  | 63  |    |    | 63  |
| 4   | 85  | 74  | 66  | 60  | 83  | 73  | 65  | 59  | 70  | 64  | 58  | 68  | 62  | 58  | 66  | 61  | 57  | 55  |    |    | 55  |
| 5   | 79  | 66  | 58  | 52  | 77  | 65  | 57  | 51  | 63  | 56  | 51  | 61  | 55  | 50  | 60  | 54  | 50  | 48  |    |    | 48  |
| 6   | 73  | 60  | 52  | 45  | 71  | 59  | 51  | 45  | 57  | 50  | 45  | 56  | 49  | 44  | 54  | 49  | 44  | 42  |    |    | 42  |
| 7   | 68  | 55  | 46  | 40  | 66  | 54  | 46  | 40  | 52  | 45  | 40  | 51  | 44  | 40  | 50  | 44  | 39  | 37  |    |    | 37  |
| 8   | 63  | 50  | 42  | 36  | 61  | 49  | 41  | 36  | 48  | 41  | 36  | 47  | 40  | 36  | 46  | 40  | 35  | 33  |    |    | 33  |
| 9   | 59  | 46  | 38  | 33  | 57  | 45  | 38  | 32  | 44  | 37  | 32  | 43  | 37  | 32  | 42  | 36  | 32  | 30  |    |    | 30  |
| 10  | 55  | 42  | 35  | 30  | 54  | 42  | 34  | 30  | 41  | 34  | 29  | 40  | 34  | 29  | 39  | 33  | 29  | 27  |    |    | 27  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 34816 |
| 5°  | 34784 |
| 10° | 34769 |
| 15° | 34438 |
| 20° | 34186 |
| 25° | 33849 |
| 30° | 33271 |
| 35° | 32725 |
| 40° | 31760 |
| 45° | 30685 |
| 50° | 28843 |
| 55° | 26121 |
| 60° | 22926 |
| 65° | 19302 |
| 70° | 15099 |
| 75° | 10590 |
| 80° | 5935  |
| 85° | 4151  |



TEST NUMBER: P844030

CATALOG NUMBER: LD6C15DE010B2750 EU6C15B30 6LBCSMMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 60.2   | 3.9       |
| 10°-20°   | 171.3  | 11.0      |
| 20°-30°   | 257.6  | 16.6      |
| 30°-40°   | 305.4  | 19.6      |
| 40°-50°   | 303.9  | 19.5      |
| 50°-60°   | 245.0  | 15.8      |
| 60°-70°   | 148.2  | 9.5       |
| 70°-80°   | 55.1   | 3.5       |
| 80°-90°   | 8.2    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 489.1  | 31.5      |
| 0°-40°    | 794.5  | 51.1      |
| 0°-60°    | 1343.3 | 86.4      |
| 0°-90°    | 1554.7 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1554.7 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 635 |      |
| 5°  | 632 | 60   |
| 15° | 607 | 171  |
| 25° | 560 | 258  |
| 35° | 489 | 305  |
| 45° | 396 | 304  |
| 55° | 273 | 245  |
| 65° | 149 | 148  |
| 75° | 50  | 55   |
| 85° | 7   | 8    |
| 90° | 0   |      |



TEST NUMBER: P844030

CATALOG NUMBER: LD6C15DE010B2750 EU6C15B30 6LBCSMMS

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 635.1 |
| 2.5°  | 635.1 |
| 5°    | 632.1 |
| 7.5°  | 630.3 |
| 10°   | 624.6 |
| 12.5° | 615.1 |
| 15°   | 606.8 |
| 17.5° | 597.4 |
| 20°   | 586.0 |
| 22.5° | 574.6 |
| 25°   | 559.6 |
| 27.5° | 543.6 |
| 30°   | 525.6 |
| 32.5° | 508.8 |
| 35°   | 489.0 |
| 37.5° | 468.3 |
| 40°   | 443.8 |
| 42.5° | 420.1 |
| 45°   | 395.8 |
| 47.5° | 368.4 |
| 50°   | 338.2 |
| 52.5° | 307.1 |
| 55°   | 273.3 |
| 57.5° | 243.0 |
| 60°   | 209.1 |
| 62.5° | 179.1 |
| 65°   | 148.8 |
| 67.5° | 120.6 |
| 70°   | 94.2  |
| 72.5° | 70.8  |
| 75°   | 50.0  |
| 77.5° | 32.0  |
| 80°   | 18.8  |
| 82.5° | 11.3  |
| 85°   | 6.6   |
| 87.5° | 2.7   |
| 90°   | 0.0   |



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)