

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844208

Luminaire Tested: **LD6C25DE010B2750 EU6C25B30 6LBMLI**

Issue Date: 2/17/2023



Test Information

Test Method: LM-79-08
Report Number: P844208
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205108)
Test Lab: INNOVATION CENTER
Issue Date: 2/17/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD6C25DE010B2750 EU6C25B30 6LBMLI
Description:
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2244.3 lumens
Efficiency: N/A
Efficacy: 75.3 lumens/watt
Spacing Criteria (0/90/45): 0.85 / 0.85 / 0.85
Luminous Opening: Circular (Dia: 0.5' x H: 0')
CIE Type: Direct

Input Watts (W): 29.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P844208

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B30 6LBMLI

Luminous Intensity Polar Plot

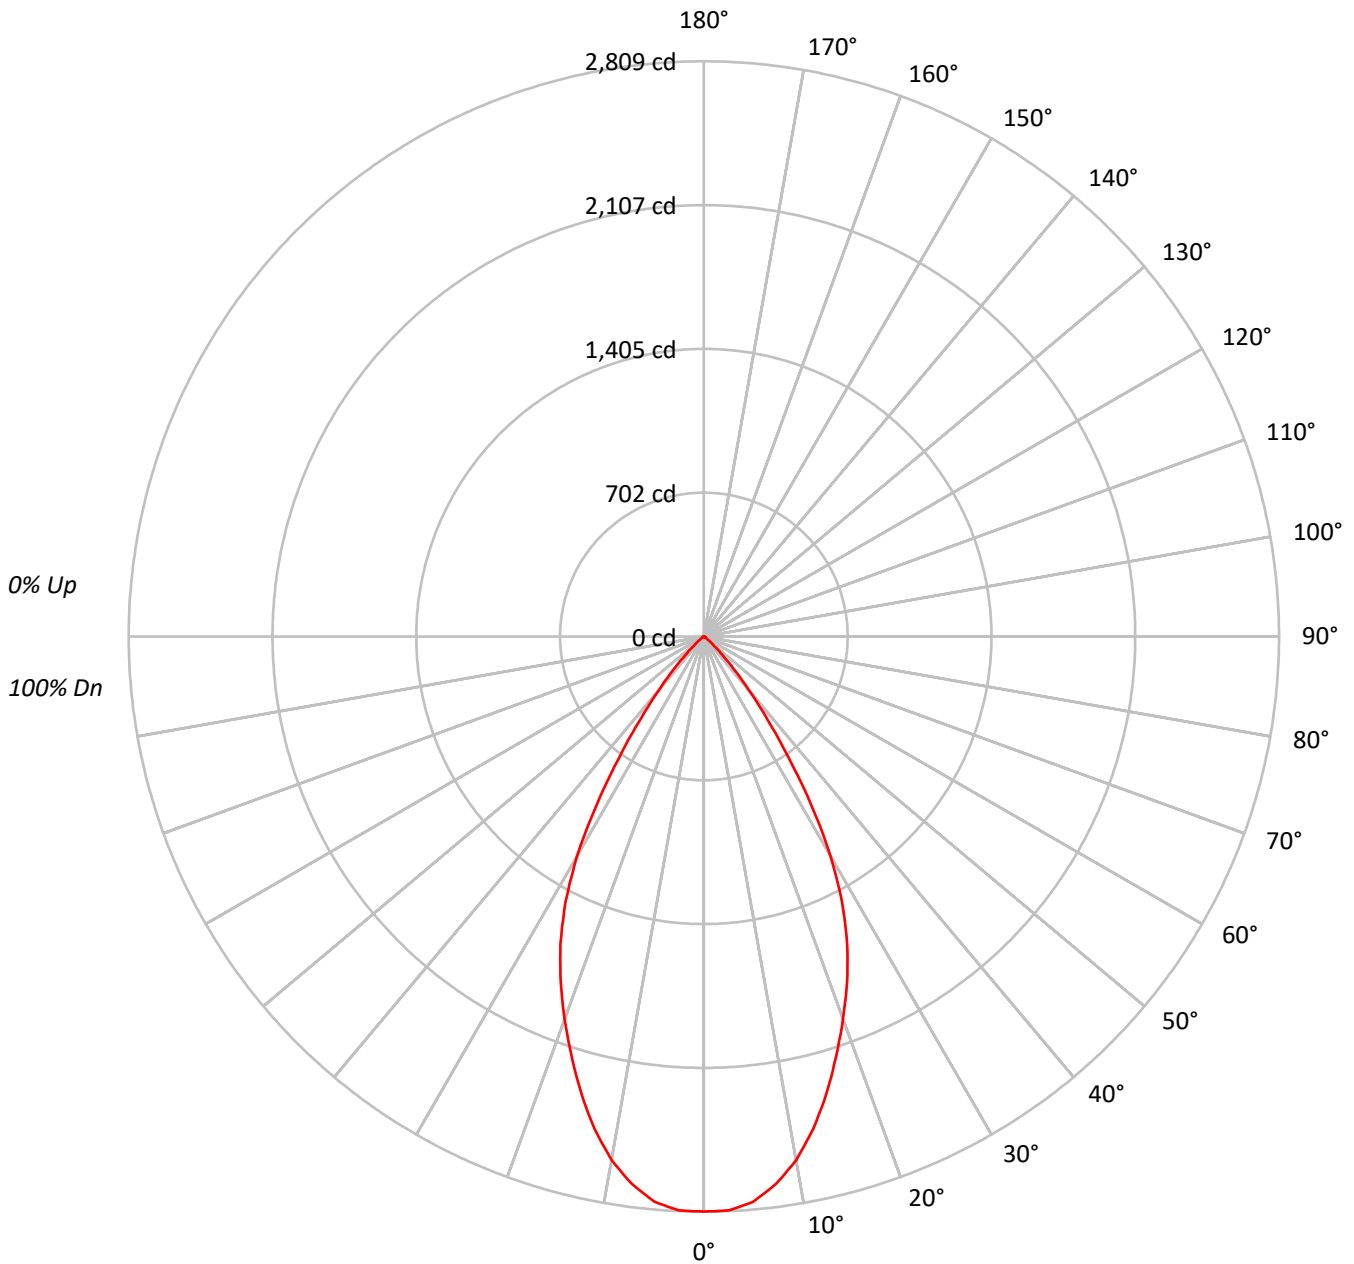



TEST NUMBER: P844208

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B30 6LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94			
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88			
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82			
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76			
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71			
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67			
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63			
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55			
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	153973
5°	152503
10°	144514
15°	131204
20°	115936
25°	100234
30°	78347
35°	48044
40°	24660
45°	9799
50°	3181
55°	1090
60°	943
65°	752
70°	465
75°	614
80°	0
85°	0



TEST NUMBER: P844208

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B30 6LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	258.7	11.5
10°-20°	644.2	28.7
20°-30°	748.8	33.4
30°-40°	458.5	20.4
40°-50°	113.9	5.1
50°-60°	13.3	0.6
60°-70°	5.0	0.2
70°-80°	1.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1651.7	73.6
0°-40°	2110.2	94.0
0°-60°	2237.4	99.7
0°-90°	2244.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2244.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2809	
5°	2771	259
15°	2312	644
25°	1657	749
35°	718	459
45°	126	114
55°	11	13
65°	6	5
75°	3	2
85°	0	0
90°	0	



TEST NUMBER: P844208

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B30 6LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2808.7
2.5°	2805.7
5°	2771.3
7.5°	2696.6
10°	2596.1
12.5°	2464.0
15°	2311.8
17.5°	2148.2
20°	1987.3
22.5°	1826.4
25°	1657.1
27.5°	1461.8
30°	1237.7
32.5°	976.4
35°	717.9
37.5°	505.4
40°	344.6
42.5°	215.3
45°	126.4
47.5°	71.8
50°	37.3
52.5°	17.2
55°	11.4
57.5°	8.6
60°	8.6
62.5°	5.8
65°	5.8
67.5°	2.9
70°	2.9
72.5°	2.9
75°	2.9
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)