

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P844227

Luminaire Tested: **LD6C25DE010B2750 EU6C25B35 6LBNH**

Issue Date: 2/17/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P844227  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P203666)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/17/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD6C25DE010B2750 EU6C25B35 6LBNH  
Description:  
Light Source: -  
Ballast/Driver:

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1619.3 lumens  
Efficiency: N/A  
Efficacy: 54.3 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.84  
Luminous Opening: Circular (Dia: 0.5' x H: 0')  
CIE Type: Direct

Input Watts (W): 29.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P844227

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B35 6LBNH

### Luminous Intensity Polar Plot

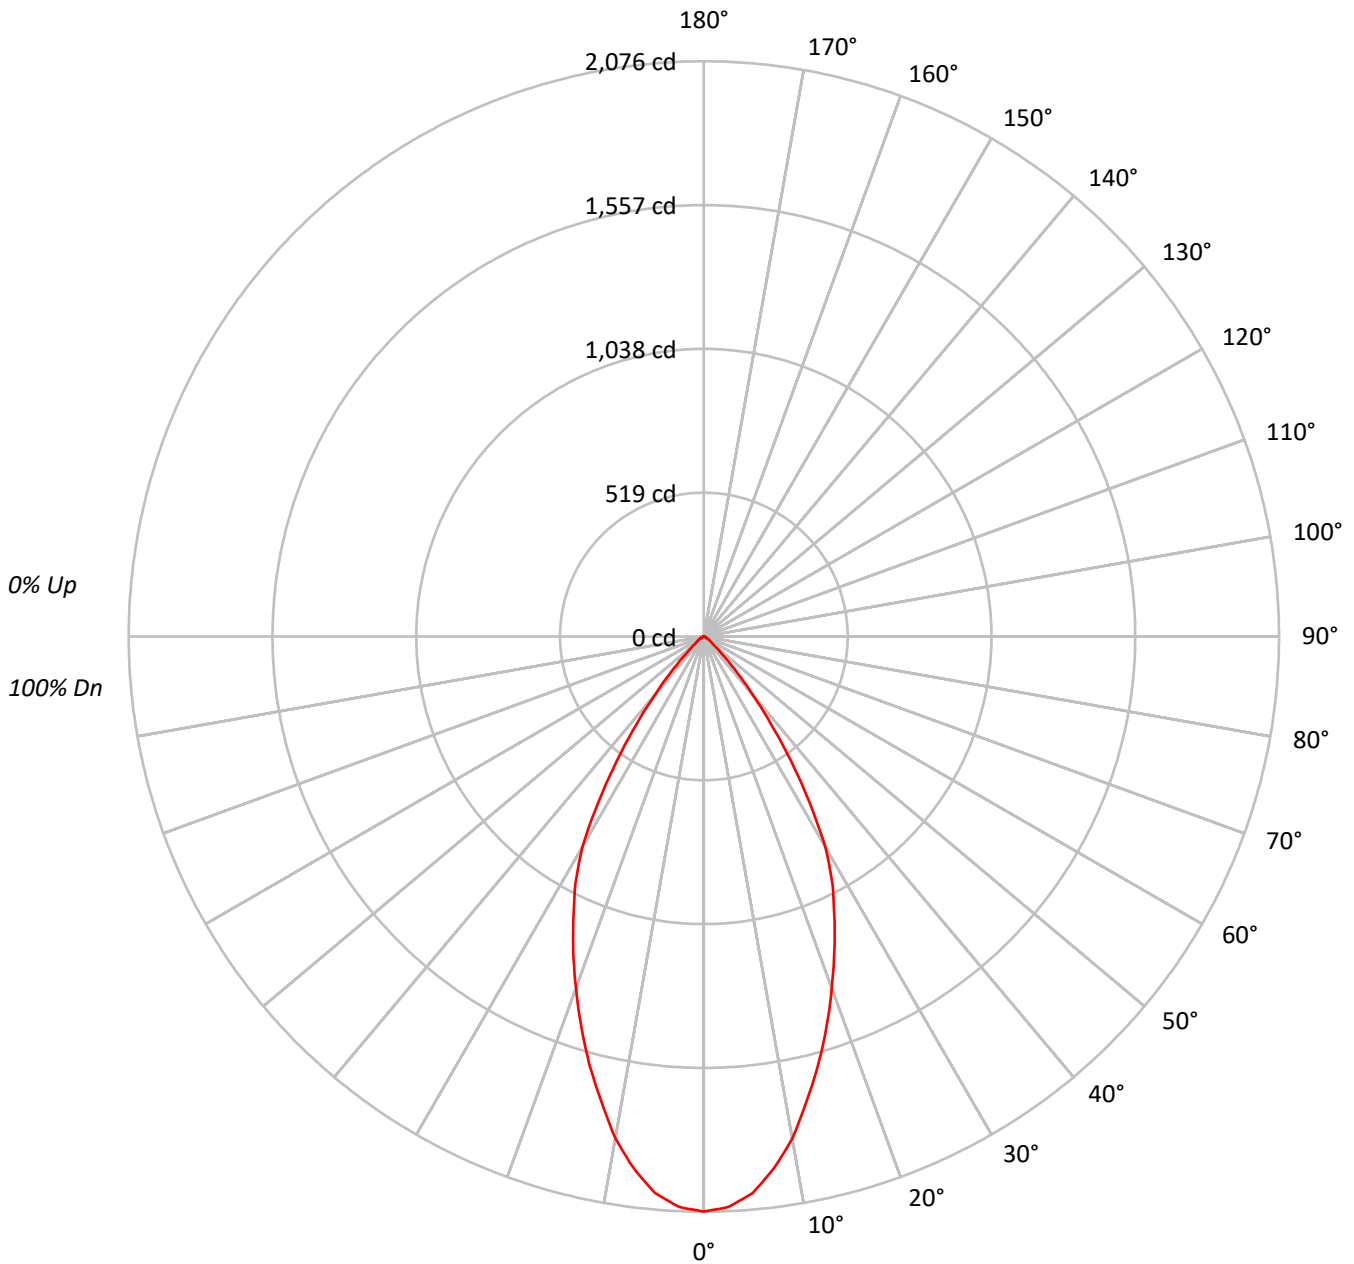



TEST NUMBER: P844227

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B35 6LBNH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	113790
5°	110973
10°	102397
15°	90653
20°	78716
25°	67328
30°	55509
35°	36553
40°	19651
45°	8699
50°	3531
55°	2552
60°	1612
65°	1154
70°	946
75°	635
80°	947
85°	0



TEST NUMBER: P844227

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B35 6LBNH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	186.7	11.5
10°-20°	445.1	27.5
20°-30°	510.0	31.5
30°-40°	342.6	21.2
40°-50°	97.9	6.0
50°-60°	24.0	1.5
60°-70°	9.1	0.6
70°-80°	3.6	0.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1141.7	70.5
0°-40°	1484.4	91.7
0°-60°	1606.2	99.2
0°-90°	1619.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1619.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2076	
5°	2017	187
15°	1597	445
25°	1113	510
35°	546	343
45°	112	98
55°	27	24
65°	9	9
75°	3	4
85°	0	0
90°	0	



TEST NUMBER: P844227

CATALOG NUMBER: LD6C25DE010B2750 EU6C25B35 6LBNH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2075.7
2.5°	2060.9
5°	2016.6
7.5°	1936.8
10°	1839.5
12.5°	1715.4
15°	1597.3
17.5°	1473.4
20°	1349.3
22.5°	1231.3
25°	1113.1
27.5°	1003.9
30°	876.9
32.5°	708.6
35°	546.2
37.5°	398.6
40°	274.6
42.5°	180.1
45°	112.2
47.5°	67.9
50°	41.4
52.5°	32.5
55°	26.7
57.5°	20.7
60°	14.7
62.5°	11.7
65°	8.9
67.5°	5.9
70°	5.9
72.5°	3.0
75°	3.0
77.5°	3.0
80°	3.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)